




Nowodvorski
LIGHTING



Nowodvorski
LIGHTING



Tadeusz Nowodvorski



Bartłomiej Nowodvorski



Olga Krywult



Anna Bielnik



Aleksandra Kania-Biegus



Łukasz Jaworski

NOWODVORSKI LIGHTING

Za każdą lampą Nowodvorski Lighting stoi historia pasji, dbałości o jakość i zamiłowania do nowatorskich rozwiązań.

Behind every Nowodvorski Lighting lamp lies a story of passion, commitment to quality, and a love for inventive solutions.



Borys Nowodvorski



Tomasz Słabiak



Agnieszka Solecka



Design Lab



Małgorzata Nowodvorska

Naszą podróż rozpoczęliśmy w 1994 roku jako mała, rodzinna firma. Dziś, obecni na 45 rynkach świata, tworzymy oświetlenie dla domów, mieszkań i przestrzeni HORECA. Pomagamy piękniej żyć. Udowadniamy, że wyjątkowe wnętrza tworzy się światłem.

Our journey began in 1994 as a small family-owned company. Today, present in 45 markets worldwide, we create lighting for homes, apartments, and HORECA spaces. We inspire a more beautiful life, proving that exceptional interiors are shaped by light.

Sercem naszej marki jest dział rozwoju produktów – Design Lab. To tutaj rodzą się pomysły, które zespół projektantów i konstruktorów przekuwa w wyjątkowe kolekcje. Dopracowane wzornictwo, przemyślana funkcjonalność i pełne skupienie na użytkowniku sprawiają, że nasze oświetlenie wykracza poza utarte schematy. Tworzymy nie tylko lampy zdobiące wnętrza, ale przede wszystkim światło, które pisze codzienne scenariusze.

At the heart of our brand is the Design Lab – our product development department. This is where ideas are born and shaped into unique collections by our team of designers and engineers. Thoughtfully designed aesthetics, carefully considered functionality, and a strong focus on the user make our lighting stand out from the ordinary. We create not just lamps that decorate interiors but also light that sets the scene for everyday life.



Wojciech Paul



Wiktoria Morawska





Damian Olszak



Nasze oprawy powstają w dwóch zakładach produkcyjnych – w Częstochowie i Siemianowicach Śląskich. Każdego dnia ponad 300-osobowy zespół dba o to, by produkty, które trafią do Twojego wnętrza, wyróżniały się designem, precyzją wykonania i najwyższą jakością. Możemy spełnić tę obietnicę dzięki 20 000 m² powierzchni produkcyjnej i magazynowej, obejmującej nowoczesny, zautomatyzowany park maszynowy, laboratorium fotometryczne oraz centrum logistyczne.



Our lighting fixtures are manufactured in two production facilities – in Częstochowa and Siemianowice Śląskie. Every day, our team of over 300 people ensures that the products reaching your interiors stand out with their design, precise craftsmanship, and top quality. We can fulfill this promise thanks to 20,000 m² of production and warehouse space, which includes a modern, automated machine park, a photometric laboratory, and a logistics center.

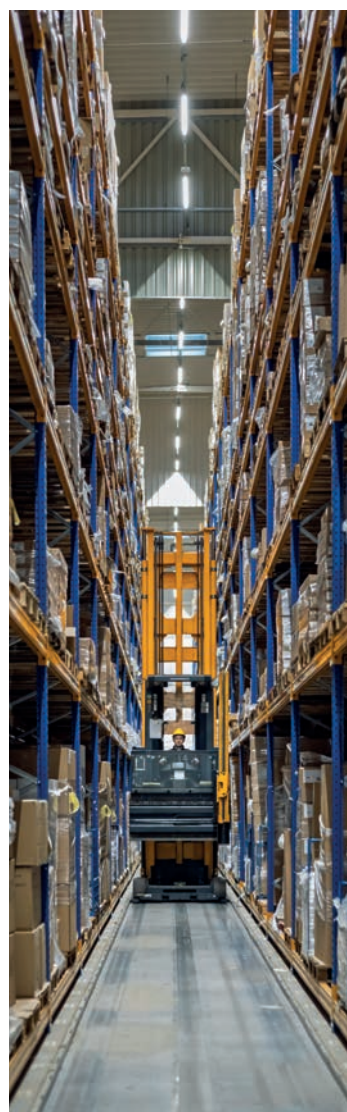

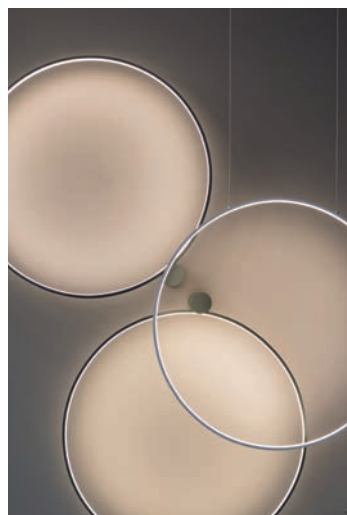

Nasze lampy rozświetlą Twoje wnętrza i pomogą stworzyć wyjątkową atmosferę. Odwiedź Dom Marki Nowodvorski Lighting, nasze stoiska targowe i salony partnerskie – przekonaj się, jak łatwo możesz odmienić swoje otoczenie światłem.

Our lamps will brighten your interiors and help you create a unique atmosphere. Visit the Nowodvorski Lighting Brand Home, our trade fair stands, and partner showrooms to discover how easily you can transform your surroundings with light.

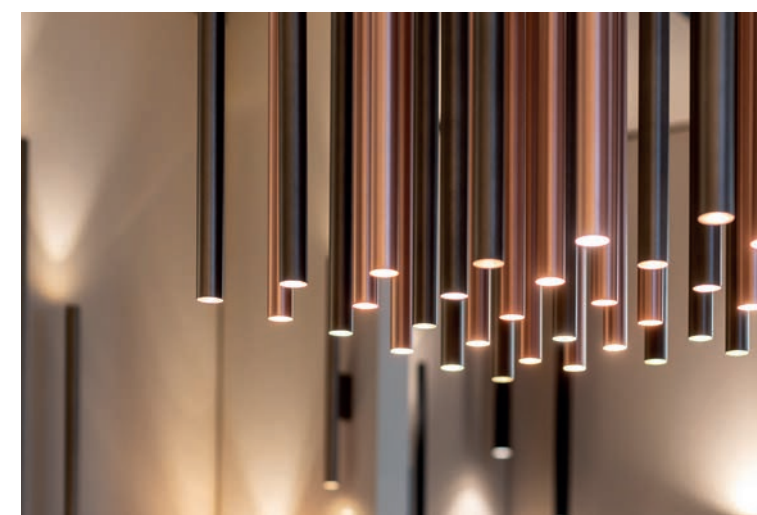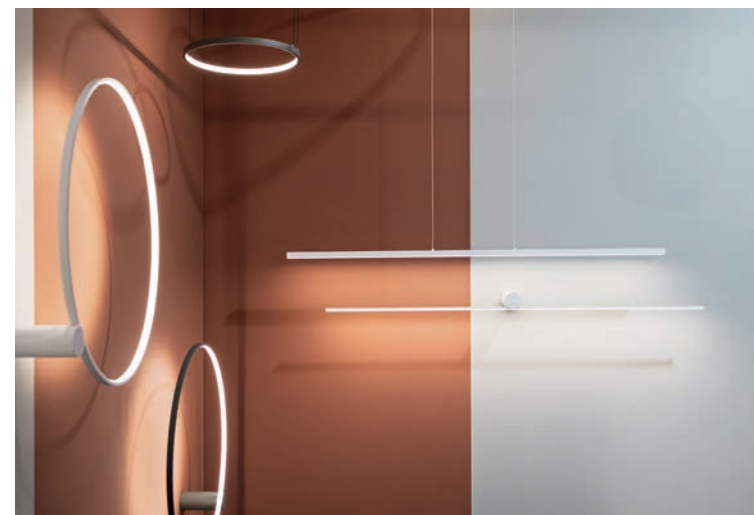

COLLECTIONS



CIRCOLO
LED

24-32



CIRCOLO
POWER
LED

25-26



LINEO LED

34




VERTIC LED

35



GIAVELLOTTO
LED

37



BAR LED

40-41



MOTIVE
LED

42



SABER
LED

44-45



EASY LED

46



ARM LED

48



SLASH LED

49



SPIN LED

51



IMPULSE
LED

52-53



VAN GOGH
LED

54



ORTO

58-59



LASER

60-64



STALACTITE

65



LASER
WALL

66-67



FOURTY

70-73



FOURTY
WALL

74-75



FOURTY
SPOTLIGHTS

76-77



MONO S

80-81



MONO
SPOTLIGHTS

82-86



MONO
CORNER

87



MONO LONG

88



MONO
WALL

89



MONO
SURFACE

90-91



MONO
DEEP

92



MONO
SLIDE

93



MONO
FLOOR

94-95



MONO
TABLE

95



EYE
PENDANT

96-98



BATON

99



CYLINDER

100



EYE

101



EYE WALL

102



EYE FLEX

103



EYE SPOT

104-105



EYE SUPER

106-109



MORE EYE

110



MORE
TONE

111



IMBRIA

112



SLING

113



KARO

116-117



SNOWBALL

120



KIER

121



PIK

122



GLOBE
PLUS

123



SPHERE

124-125



PEAR

126-127



LUXORA LED

130-131



CRISTAL

132-133



HAMPTON

134



NEWPORT

135



CERAMIC
LED

138-139



CLAY

141



POLARIS

142



AMALFI

143



MONACO

144-145



VETRO

146-147



SANTANA

150-153



AMARELA

154-157



CEDRO

160-163



LAGO

166-169



TUTOIA

171



POISE

172



TURDA

176-178



LAGUNA

179



CADILAC

180-181



MIST

182



FORM

183



CAMERON

184-185



VIVIANE

186



VIOLET

187



VIPER

188



FALCON

189



ALICE

190-191



HOTEL
MOOD

192-194

											
HOTEL PLUS 196	MOSS 197	CHILIN 198	LUSSO 199	DROPS WOOD 202-205	SUNSET 208, 211	MALMO 269	RING MIRROR LED 271	RING LED 272-273	COMMA LED 275	RADIUS 276-277	WORKSHOP 278
											
SUNSET NATURAL 209	SUNSET LED 210	SUNRISE LED 210	SUN LED 211	RING TIMBER LED 212	WHEEL 214	SILICONE 279	SPIDER 280	TWIG 281	CRATE 282	PLANT 283	TECHNO 284-285
											
WHEEL LUX 214-215	RING WOOD LED 216	DISK 218	HEFT 219	KYMI 222	IKA 223	HARMONY 284	PANTOGRAPH 286	CRAFT 287	HIGH-BAY 288	GARRET 289	HEMISPHERE RUST 290
											
DOVER 226-227	MINIMAL 228	OSLO 228-229	RATTAN 230	PUKET 231	HAVANA 232-233	HEMISPHERE SUPER 291,293	HEMISPHERE HIT 292	CANOE 294	EGG 295	ARES 296	GIOTTO LED 297
											
HAITI 234	BOHO 235	JAPANDI 236	KRABI 237	PUMPKIN 240-241	WAVE 242	ORGANIC 298	IRIS LED 299	LIA LED 299	TUBE 299	STRAIGHT CEILING LED 300	STRAIGHT WALL 301
											
NESS 242	LUKSOR 243	ABI 243	SIMONE 246	POINT DUO 248	ZENITH 252-254	SOFT WALL LED 302	SOFT LED 303-304	ION LED 305	CL OFFICE LED PRO 306-307	MULTI LED 308	NIKKI ROUND LED 310
											
SATELLITE 258-259	HERMANOS 260-261	ORBIT 263-265	PILLS 266-267	BERGEN 269	HAGA 269	LID ROUND LED 313	LID SQUARE LED 314	ARENA 316	KASAI 317	SMART LED 319	

DOWNLIGHTS



COBBLE 322



GAP 322



GROOVE 322-323



PAG 322



OVAL 323



MIDI LED 324-325



MIDI LED RECESSED 326



MINI LED RECESSED 329



FOCUS MINI LED 330



CL IOS LED 332-333



HALO 334



POINT TONE 334



INDIA 335



FLEA 335



SET 336



EYE TONE 337-338



POINT PLEXI 339



BIT 339



POINT 339



SILBA 340



CRES 340



MURTER 340



MLJET 340



VIS 341



HVAR 341



SOLTA 341



SHINE 341



UNO 342



CUP 343



MYKONOS LED 344



EGINA LED 345



CL KOS LED 346



CL DIA LED 348



CL KEA LED 349



MOD 350



DOWNLIGHT ES111 351



EYE MOD 352



DOT 353

NANO LVM LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM 24V



NANO - LVM FOCUS OUT LED 360-361



NANO - LVM LINE OUT LED 362-363



NANO - LVM LINE IN LED 364



NANO - LVM FLEX LINE LED 365



NANO - LVM SPOT LED 366



NANO - LVM MUG LED 367



NANO - LVM SPOT ZOOM LED 368-369



NANO - LVM TRACKS AND ACCESSORIES 370-379

ULTRA THIN LVM LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM 48V



UT-LVM FOCUS LED 382-383



UT-LVM LINE LED 384-385



UT-LVM FOCUS OUT LED 386-387



UT-LVM FOCUS SWING LED 388-389



UT-LVM SPOT LED 390-392



UT-LVM ROLLER LED 393



UT-LVM TRACKS AND ACCESSORIES 394-397

LVM LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM 48V



LVM FOCUS 400-401
LED



LVM FOCUS OUT LED 402-403



LVM LINE LED 404-405



LVM SPOT LED 406-407



LVM ROLLER LED 408



LVM LID LED 410



LVM SLOT LED 411



LVM TRACKS AND ACCESSORIES 414-423

CTLS COMMERCIAL TRACK LIGHT SYSTEM



CTLS MILO LED 426-427



CTLS NEA LED 428-430



CTLS TINOS LED 432-433



CTLS SNOWBALL 434



CTLS MONO 435



CAMELEON ADAPTER CTLS 435



CTLS TRACKS 436-443 AND ACCESSORIES

PROFILE TRACK LIGHT SYSTEM



PROFILE TINOS LED 446-447



PROFILE IRIS LED 448-449



PROFILE MIKE 450



PROFILE INDIA 450



PROFILE FOCUS LED 450



PROFILE ZOOM LED 451



PROFILE EYE SUPER 452



PROFILE SNOWBALL 452



PROFILE BIT PLUS 453



PROFILE BIT 453



PROFILE EYE 453



PROFILE EYE SPOT 454



PROFILE MONO 454



PROFILE PUCK 454



PROFILE SNOWBALL 455



PROFILE VESPA 455



CAMELEON ADAPTER PROFILE 455



PROFILE TRACKS AND ACCESSORIES 456-463

BATHROOM LIGHTING



ICE BALL 466



ALOE 466



ARALIA 467



AGAVE 467



NATALIE 469



ICE TUBE LED 470-471



BRAZOS 472-473



SIMI 473



ICE EGG 474



SIS 475



CAYO 475



VISTA 476



OUTDOOR LIGHTING





EXE 543 ROCK PRO 544 SIERRA 544 HEXA 545 EDESA LED 545 QUARTZ 546



ORINOKO 546 CABO LED 547 UNIT LED 547 BRICK 547 OSCAR 548 KHUMBU 549



MUNO LED 549 PICNIC LED 550 AMY LED 552 NALA LED 554 MAHE LED 555 PUEBLA LED 556



MERIDA LED 556 PIX LED 557 OUTLINE LED 558 CLINE LED 560 ABBY LED 561 AVA LED 561



BAY LED 562 SIDEWALK SQUARE LED 563 SIDEWALK ROUND LED 563 BASALT 564 ASSAM 564 INA 564



STEP LED 565 OIA LED 565 BUSH 566 SPIKE LED 566 RUMY LED 567 PICCO LED 568



PAT LED 569 PAOLI 569 MON LED 569 CIRCLLET LED 569 ANA 570 AMELIA 571



AMUR 572 TAY 572 LANTERN 573 TYBR 573 DON 573 NOOK 574



TAHOE 575 FESTOON LIGHTS 577

LIGHT SOURCES AND ACCESSORIES



BULB LED G9, 7W 580 BULB LED G9, 4W 580 BULB LENS LED, G9, 3W 580 REFLECTOR LED, GU10, R35, 4W 581 REFLECTOR LED, GU10, R50, 7W 581 REFLECTOR LED, GU10, R50, 7W, DIMMABLE 581



BULB GLASS BALL LED, E27, 8W 582 BULB LED E14, T25, 4W 582 BULB LED, GX53, 8W 582 REFLECTOR LENS LED, GU10, ES111, 9W 583 REFLECTOR DIFFUSER LED, GU10, ES111, 9W 583 BULB VINTAGE LED, E27, 6W 584



BULB VINTAGE LED, E27, 6W 584 BULB VINTAGE LED, E27, 6W 584 BULB VINTAGE LED, E27, 6W 584 BULB LED E14, C35, 6W 585 BULB LED E27, A60, 7W 585 BULB LED E27, A60, 10W 585



BULB LED, E27, A60, 2W, 5 PC SET 585



TUBE LED T8 586



WATERPROOF
CONNECTOR
IP68 687



WATERPROOF
„Y” CONNECTOR
IP 68 687



MICROWAVE
SENSOR 587



48V DC
POWER
SUPPLY 588



24V DC
POWER
SUPPLY 588



HONEY
COMB 589



ACROBAT 589



BALLERINA 589

Nasze produkty to efekt dbałości o jakość i zamiłowania do nowatorskich rozwiązań, a sposób ich prezentowania jest wizytówką naszej pracy. Wszystkie zdjęcia i wizualizacje zamieszczone w tym katalogu są starannie dostosowane wyłącznie do jego parametrów. Prosimy o niekorzystanie z nich bez naszej wiedzy i zgody. Jeśli potrzebujesz materiałów graficznych do innych potrzeb, skontaktuj się z nami pod adresem marketing@nowodvorski.com


Wszelkie prawa do dysponowania materiałami zamieszczonymi w katalogu i decydowania o sposobie ich wykorzystania przysługują Nowodvorski Lighting sp. z o.o.

Our products are the result of our commitment to quality and passion for inventive solutions, and the way they are presented is a showcase of our work. All photos and visualizations in this catalog have been carefully tailored exclusively to its specifications. Please do not use them without our knowledge and consent. If you need graphic materials for other purposes, please contact us at marketing@nowodvorski.com.

All rights to manage the materials included in this catalog and decide on their use belong to Nowodvorski Lighting sp. z o.o.



Collections

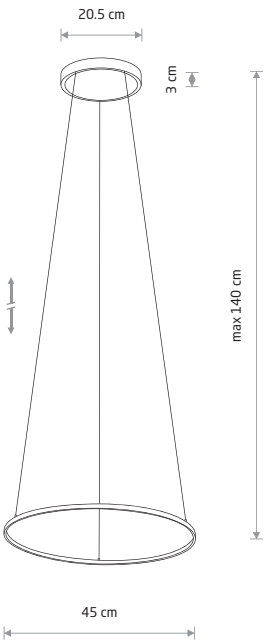


CIRCOLO LED S

painted aluminum, painted steel, plastic PC

10813 3000K

10863 4000K

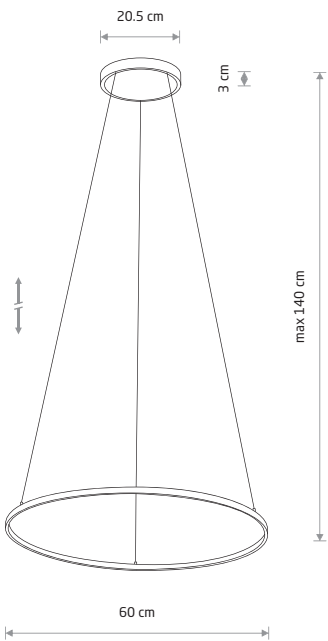

CIRCOLO LED M

painted aluminum, painted steel, plastic PC

10812 3000K

10862 4000K

11403 3000K

11604 3000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10813	18W LED	3000K	560 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10863	18W LED	4000K	600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10812	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10862	21W LED	4000K	700 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11403	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11604	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

WHITE P004 RAL 9003

SILK OLIVE P031

BLACK P013 RAL 9005

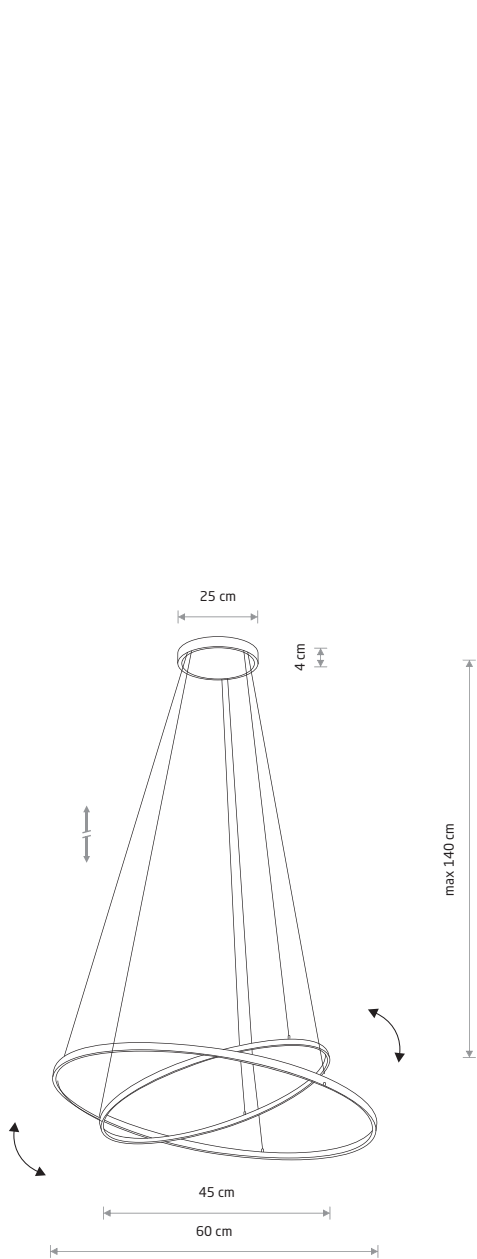

CIRCOLO LED

painted aluminum, painted steel, plastic PC

10814 3000K

10864 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10814	35W LED	3000K	1200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10864	35W LED	4000K	1300 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11646	67W LED	3000K	3700 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11647	67W LED	3000K	3100 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

WHITE P004 RAL 9003


BLACK P013 RAL 9005



CIRCOLO LED
10867



CIRCOLO LED 10816

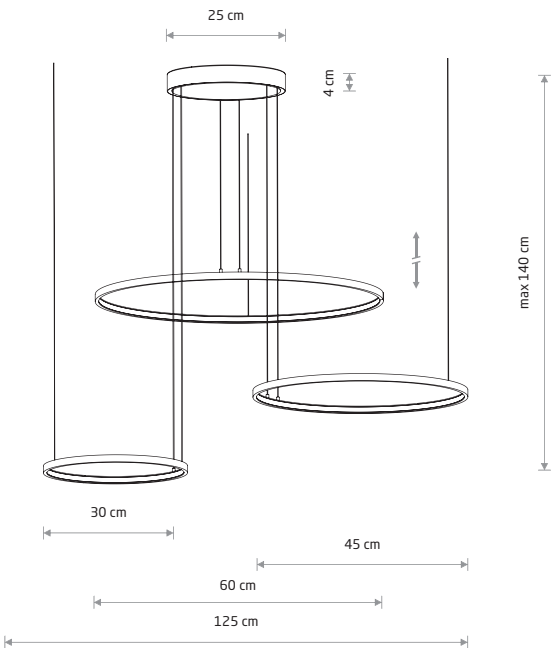



CIRCOLO POWER LED
painted aluminum, painted steel, plastic PC

11649 3000K 11648 3000K



CIRCOLO LED
painted aluminum, painted steel, plastic PC

10817 3000K 10867 4000K
11398 3000K 11602 3000K

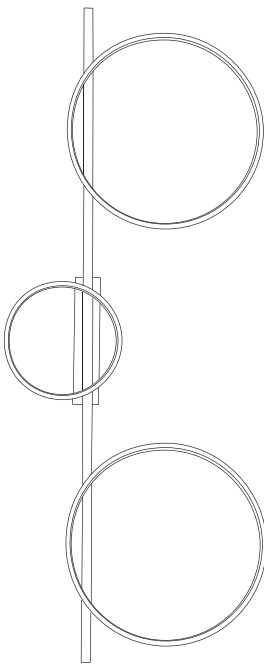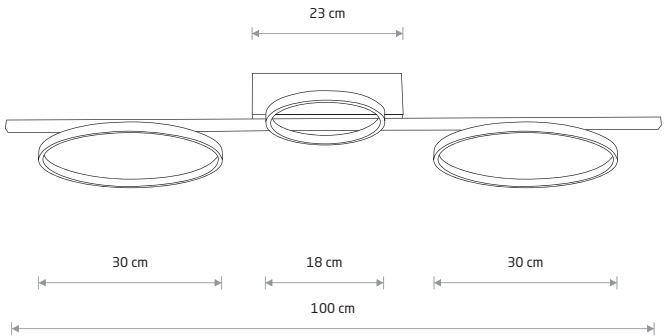

CIRCOLO LED
painted aluminum, painted steel, plastic PC

10816 3000K 10866 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10817	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10867	45W LED	4000K	1800 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11398	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11602	45W LED	3000K	1600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11648	85W LED	3000K	3750 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11649	85W LED	3000K	4600 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10816	33W LED	3000K	1100 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10866	33W LED	4000K	1200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h



CIRCOLO LED M 11603

CIRCOLO LED M
10815

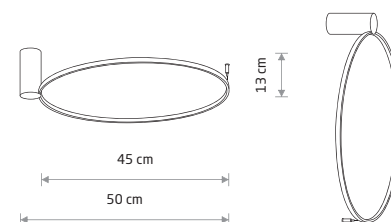


CIRCOLO LED S
painted aluminum, painted steel, plastic PC

10928 3000K 10930 4000K



CIRCOLO LED XS
10858

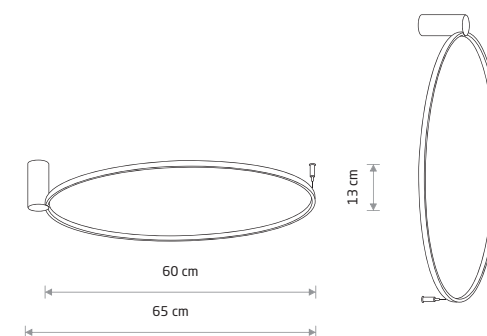

CIRCOLO LED M
painted aluminum, painted steel, plastic PC

10815 3000K 10865 4000K

11402 3000K 11603 3000K



CIRCOLO LED XS
painted aluminum, plastic PC

10808 3000K 10858 4000K

11601 3000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10808	9W LED	3000K	190 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10858	9W LED	4000K	200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10928	18W LED	3000K	560 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10930	18W LED	4000K	600 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10815	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10865	21W LED	4000K	700 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11402	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11603	21W LED	3000K	660 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11601	9W LED	3000K	190 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

SILK OLIVE P031 WHITE P004 RAL 9003 BLACK P013 RAL 9005



CIRCOLO LED S
10810


CIRCOLO LED M
10811

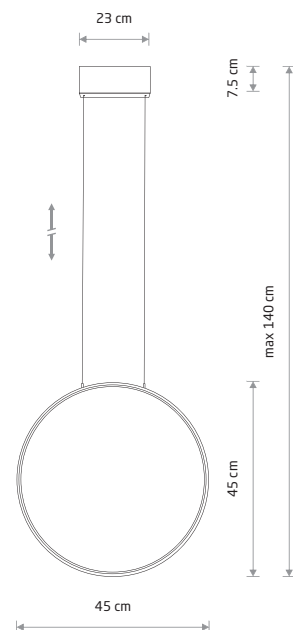

CIRCOLO LED S

■ painted aluminum, painted steel, plastic PC

■ 10810 3000K ■ 10860 4000K

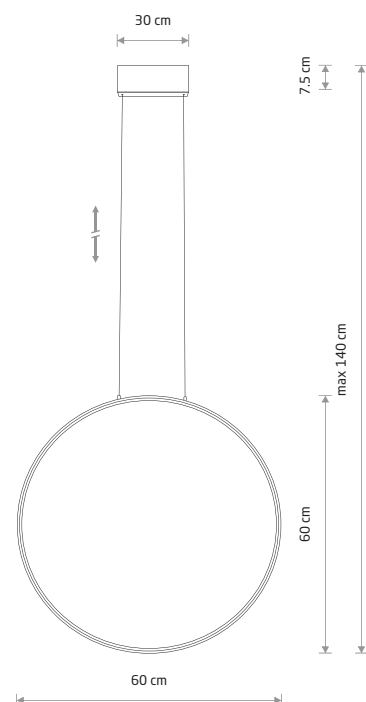

CIRCOLO LED M

■ painted aluminum, painted steel, plastic PC

■ 10811 3000K ■ 10861 4000K

■ 11401 3000K ■ 11605 3000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10810	18W LED	3000K	560 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10860	18W LED	4000K	600 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10811	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10861	21W LED	4000K	700 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11401	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11605	21W LED	3000K	660 lm	70°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

■ BLACK P013 RAL 9005 ■ SILK OLIVE P031 ■ WHITE P004 RAL 9003




CIRCOLO LED M
11605

Visualisation by Iwona Ligęza

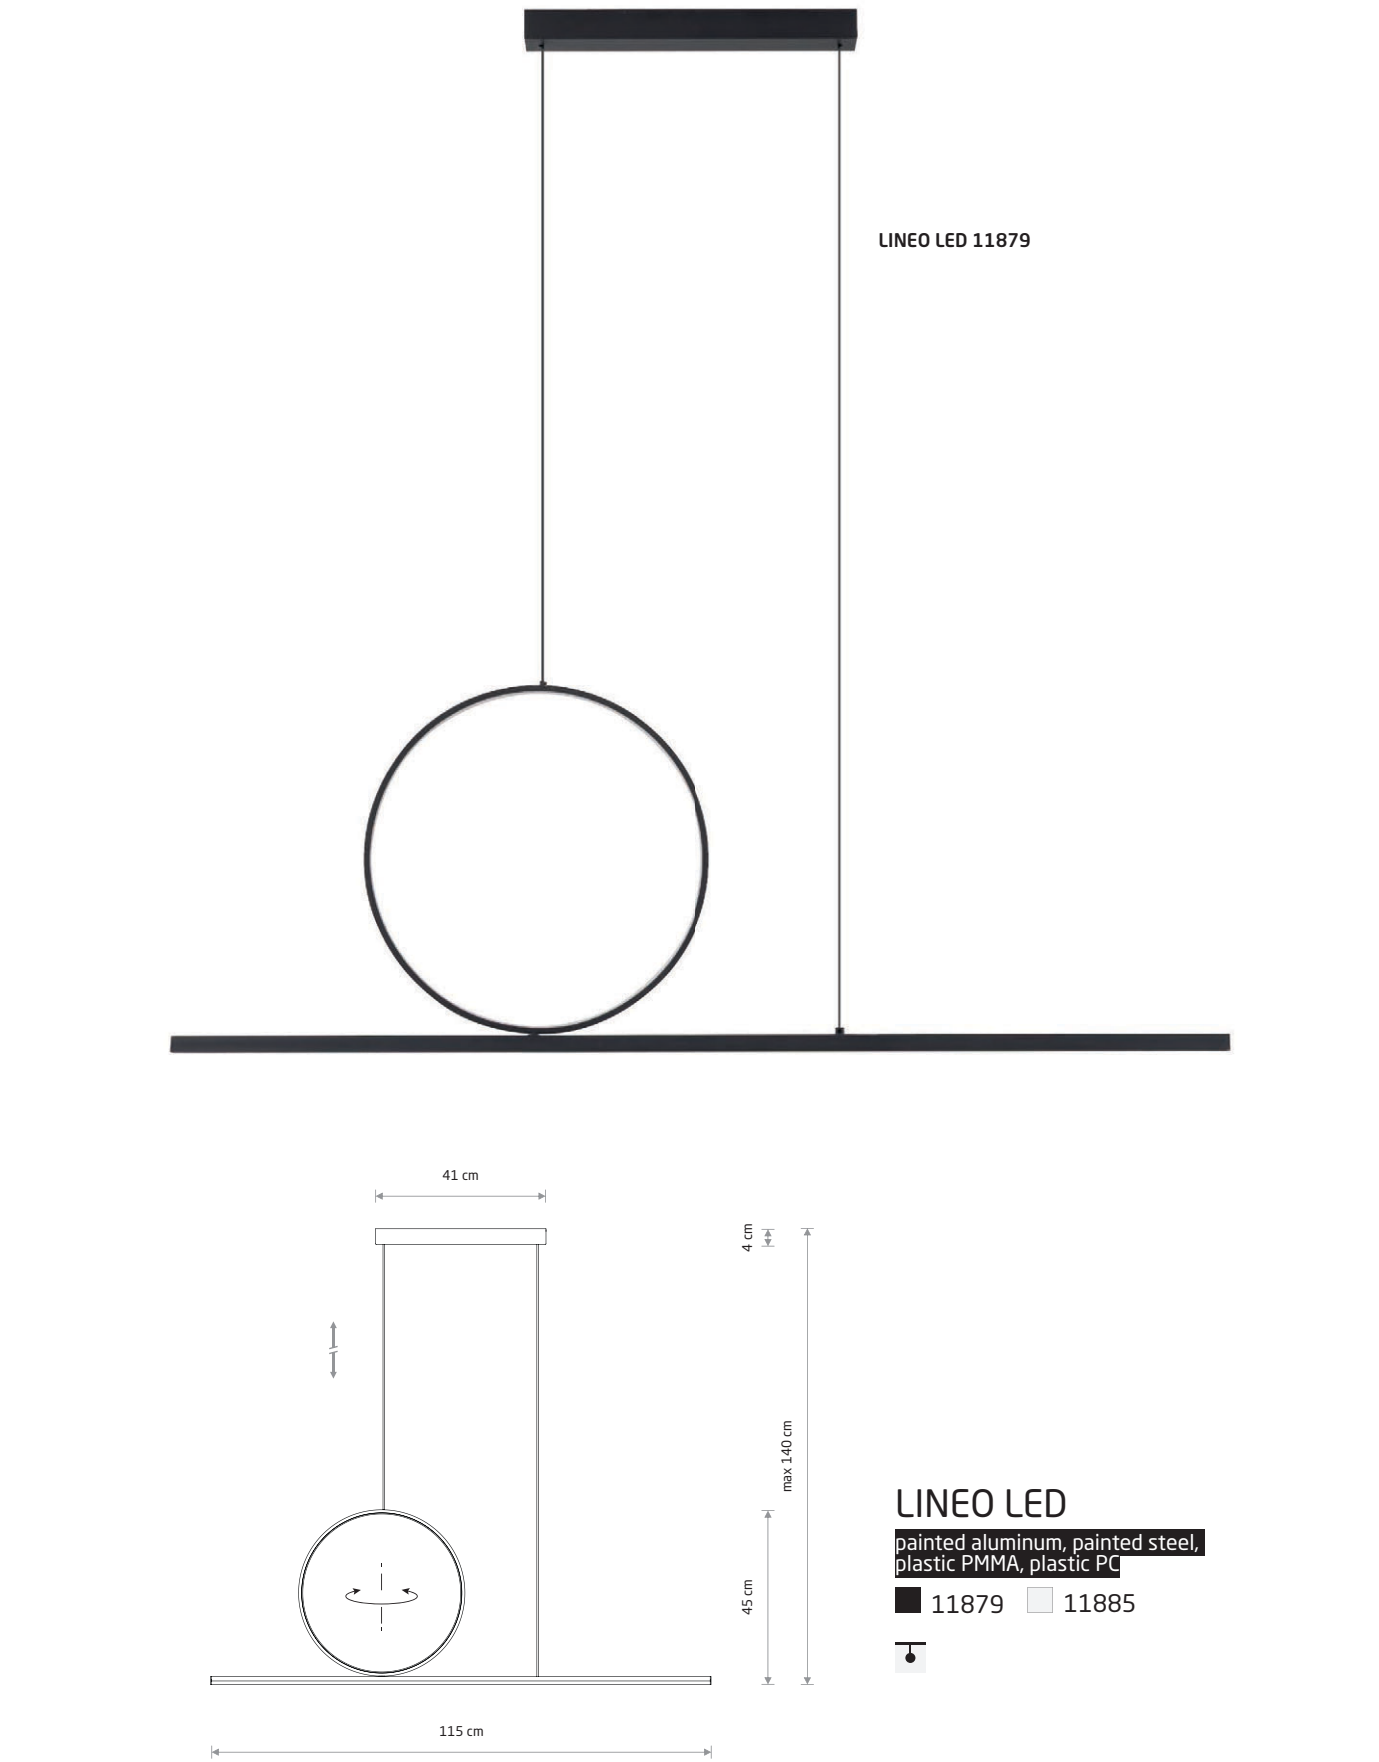

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11879	39W LED	3000K	1500 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11885	39W LED	3000K	2100 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

BLACK P013 RAL 9005 WHITE P004 RAL 9003

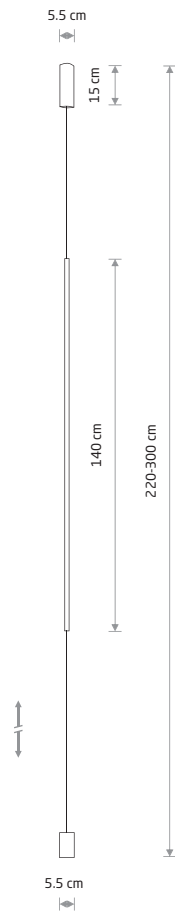

VERTIC LED

painted aluminum, painted steel, plastic PMMA

10362 3000K 10857 4000K

11606 3000K 11607 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10362	19W LED	3000K	650 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10857	19W LED	4000K	700 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11606	19W LED	3000K	750 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11607	19W LED	4000K	800 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

WHITE P004 RAL 9003 BLACK P013 RAL 9005




GIAVELLOTTO LED S 11886

GIAVELLOTTO LED S
11886

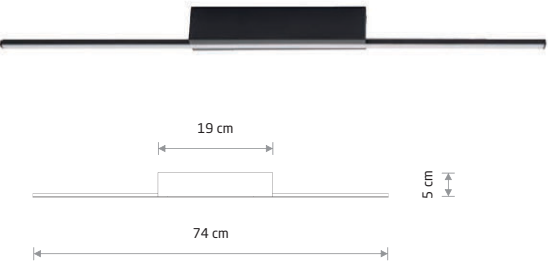


GIAVELLOTTO LED S
painted steel, painted aluminum, plastic PC
■ 11886

GIAVELLOTTO LED M
11887

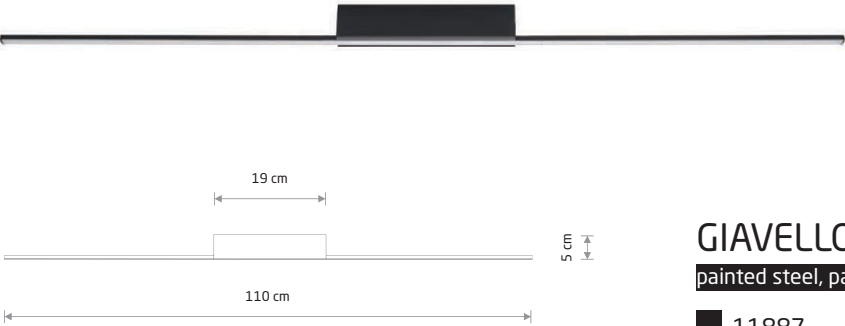

GIAVELLOTTO LED M
painted steel, painted aluminum, plastic PC
■ 11887

GIAVELLOTTO LED L
11888

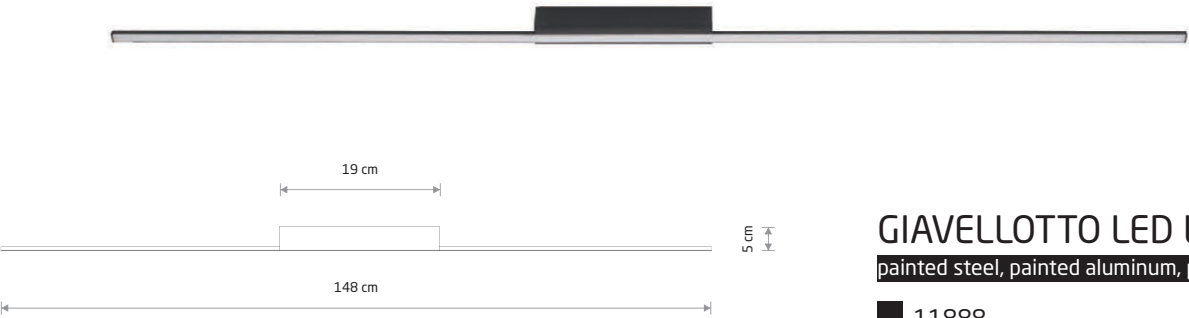


GIAVELLOTTO LED L
painted steel, painted aluminum, plastic PC
■ 11888

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11886	18W LED	3000K	1400 lm	120 °	~220-230 V, 50/60 Hz	>80	⊕	>0.9	IP20	30000h
11887	25W LED	3000K	2000 lm	120 °	~220-230 V, 50/60 Hz	>80	⊕	>0.9	IP20	30000h
11888	35W LED	3000K	2900 lm	120 °	~220-230 V, 50/60 Hz	>80	⊕	>0.9	IP20	30000h

BAR LED M
11400

CIRCOLO LED M
11403

BAR LED M
11400

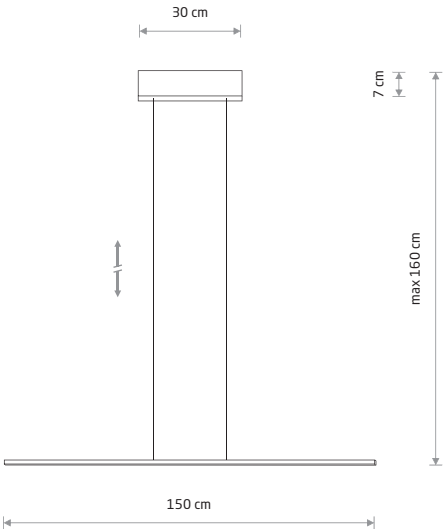

BAR LED M

painted aluminum, painted steel, plastic PMMA

10364 3000K

10848 4000K

11581 3000K

11582 4000K

11400 3000K



BAR LED S

painted aluminum, painted steel, plastic PMMA

11583 3000K

11584 4000K

10363 3000K

10847 4000K



BAR LED L

painted aluminum, painted steel, plastic PMMA


10365 3000K

10850 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11583	27W LED	3000K	1700 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11584	27W LED	4000K	1800 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11581	32W LED	3000K	2000 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10363	27W LED	3000K	1200 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10847	27W LED	4000K	1300 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11582	32W LED	4000K	2100 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11400	32W LED	3000K	1600 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10364	32W LED	3000K	1600 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10848	32W LED	4000K	1800 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10365	40W LED	3000K	2200 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10850	40W LED	4000K	2300 lm	100°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

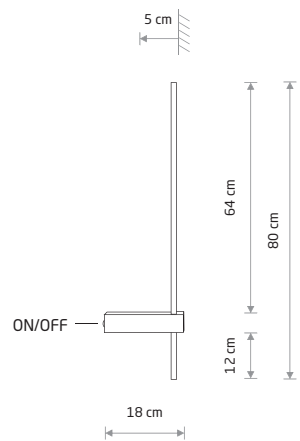


MOTIVE LED M

painted aluminum, plastic PC

10311
3000K

10852
4000K

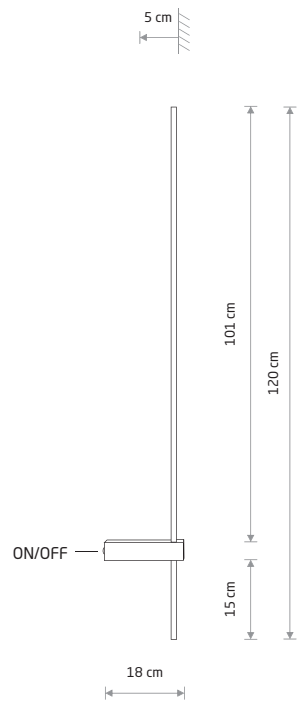

MOTIVE LED L

painted aluminum, plastic PC

10313
3000K

10851
4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10311	11W LED	3000K	380 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10852	11W LED	4000K	410 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10313	16W LED	3000K	540 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10851	16W LED	4000K	570 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h


BLACK P013 RAL 9005

MOTIVE LED M 10311

MOTIVE LED L 10313



SABER LED M 10312

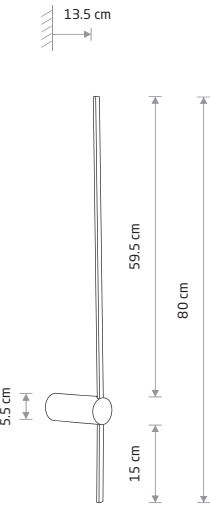

SABER LED M

painted aluminum, painted steel, plastic PC

- 10312 3000K
- 10853 4000K
- 11378 3000K
- 11380 4000K
- 11591 3000K
- 11592 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10312	11W LED	3000K	380 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10853	11W LED	4000K	410 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11378	11W LED	3000K	380 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11380	11W LED	4000K	410 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11591	11W LED	3000K	460 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11592	11W LED	4000K	490 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

BLACK P013 RAL 9005

 SILK OLIVE P031

 WHITE P004 RAL 9003

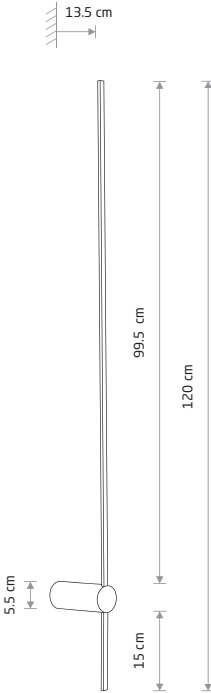

SABER LED L

painted aluminum, painted steel, plastic PC

- 10314 3000K
- 10854 4000K
- 11381 3000K
- 11382 4000K
- 11588 3000K
- 11590 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10314	16W LED	3000K	540 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10854	16W LED	4000K	570 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11381	16W LED	3000K	540 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11382	16W LED	4000K	570 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11588	16W LED	3000K	740 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11590	16W LED	4000K	790 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h


BLACK P013 RAL 9005

 SILK OLIVE P031

 WHITE P004 RAL 9003

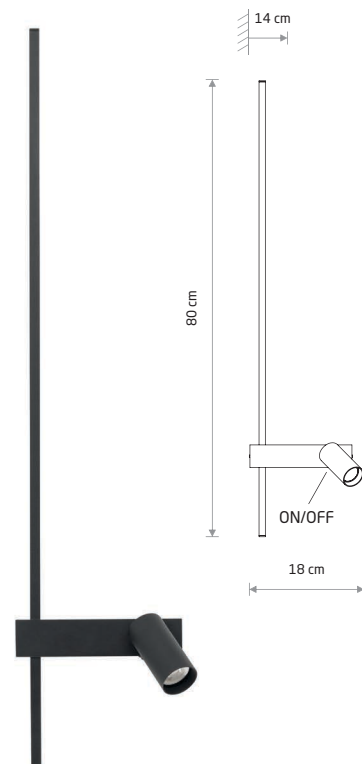

**EASY LED LEFT
11425**

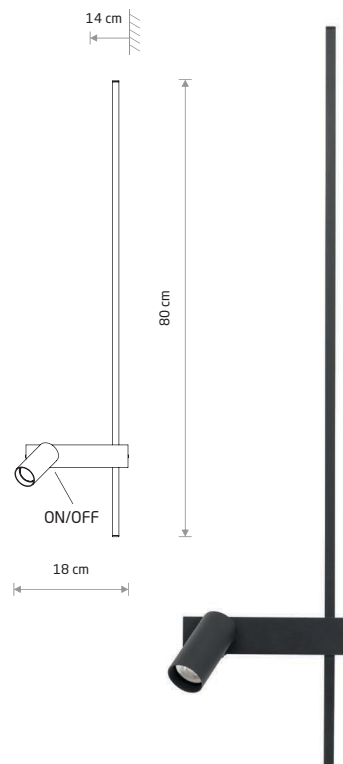

**EASY LED RIGHT
11426**



EASY LED LEFT

aluminum, painted steel, plastic PC

■ 11425 ■ 11578

🔌 1x GU10 R35, max 10W only LED



EASY LED RIGHT

aluminum, painted steel, plastic PC

■ 11426 ■ 11580

🔌 1x GU10 R35, max 10W only LED

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11425	11W LED	3000K	380 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11578	11W LED	3000K	450 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11426	11W LED	3000K	380 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11580	11W LED	3000K	450 lm	100°	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

■ WHITE P004 RAL 9003 ■ BLACK P013 RAL 9005


UT-LVM TRACK LIGHT SYSTEM



Visualisation by Iwona Ligęza



ARM LED L 10856

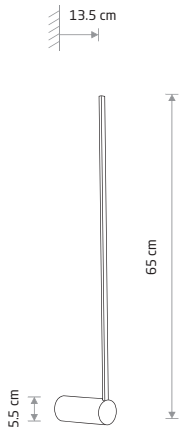


ARM LED M

painted aluminum, plastic PC

10366 3000K

10855 4000K

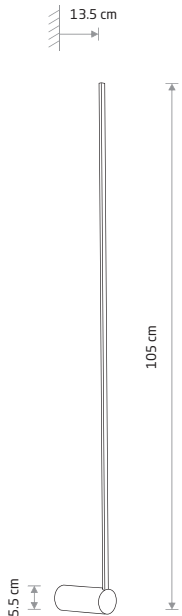

ARM LED L


painted aluminum, plastic PC

10367 3000K

10856 4000K



SLASH LED 11431

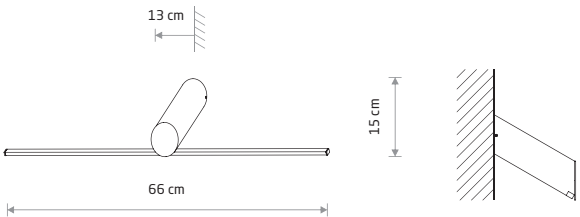

SLASH LED

painted aluminum, painted steel, plastic PC

11431




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10366	10W LED	3000K	360 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10855	10W LED	4000K	390 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10367	14W LED	3000K	520 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10856	14W LED	4000K	550 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11431	10W LED	3000K	360 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h



SPIN LED M 10370

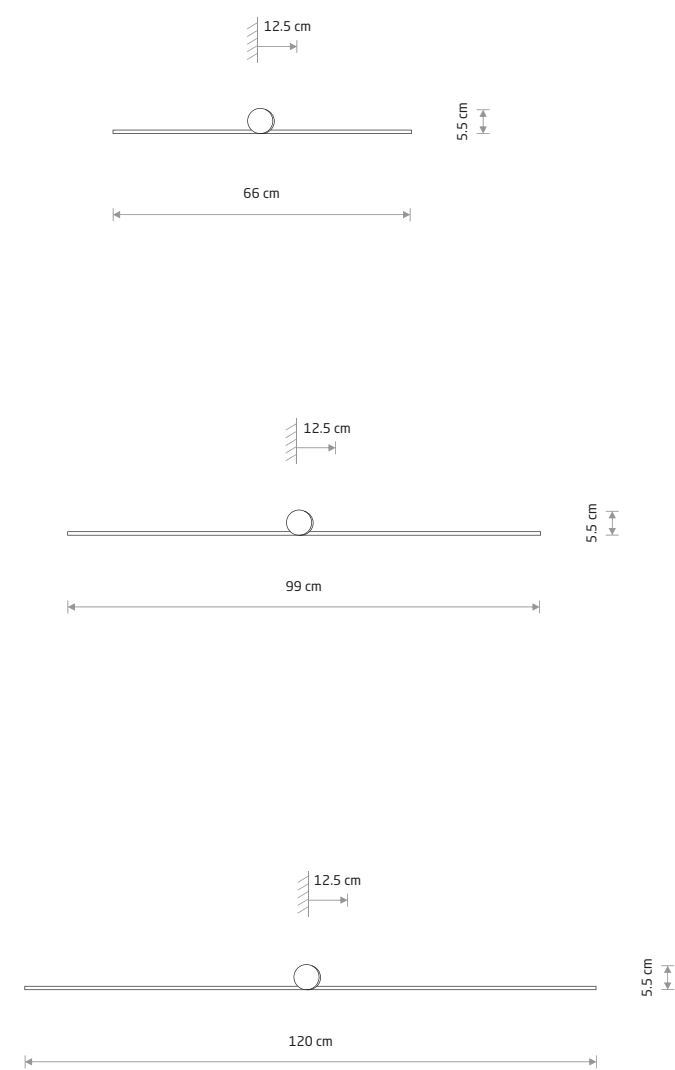

SPIN LED S
painted aluminum, painted steel, plastic PC

10368 3000K 10620 4000K

11587 3000K



SPIN LED M
painted aluminum, painted steel, plastic PC

10370 3000K 10621 4000K

11586 3000K



SPIN LED L
painted aluminum, painted steel, plastic PC


10371 3000K 10622 4000K

11585 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10368	10W LED	3000K	360 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10620	10W LED	4000K	390 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10370	14W LED	3000K	520 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10621	14W LED	4000K	550 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10371	16W LED	3000K	600 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10622	16W LED	4000K	630 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11587	10W LED	3000K	400 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11586	14W LED	3000K	650 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
11585	16W LED	3000K	750 lm	100 °	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

IMPULSE LED M 8116

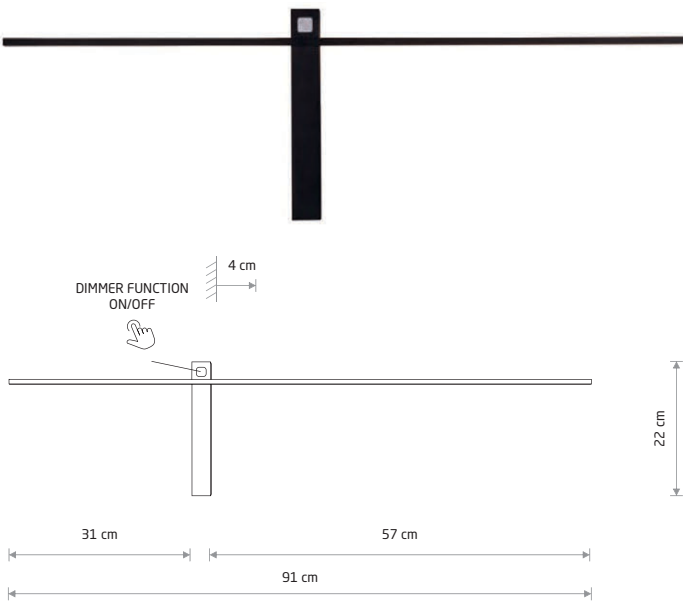


IMPULSE LED M
painted aluminum, plastic PC
8116




IMPULSE LED S 8115

IMPULSE LED L 8117

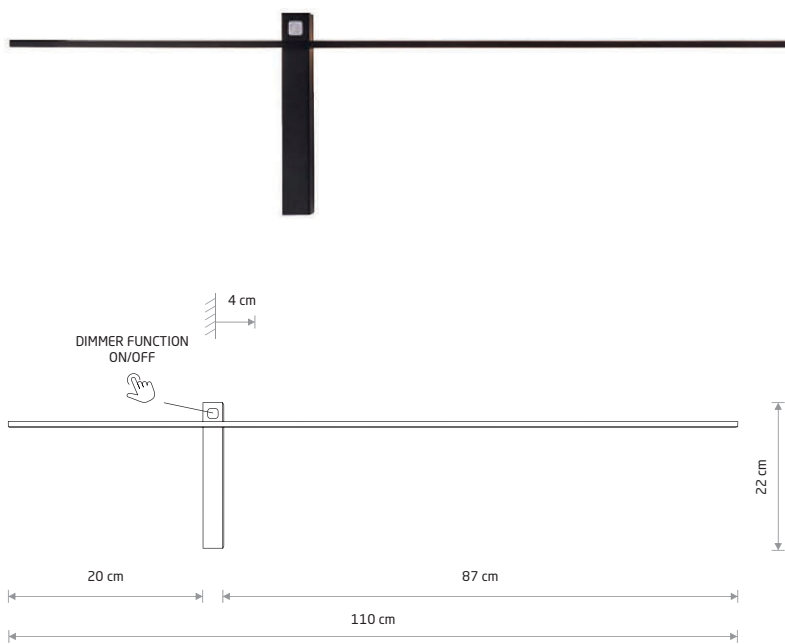

IMPULSE LED L
painted aluminum, plastic PC
8117

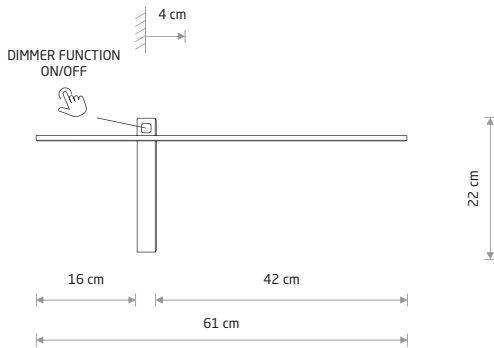


IMPULSE LED S
painted aluminum, plastic PC
8115



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8115	6W LED	3000K	200 lm	120 °	≥80	~220-230 V, 50/60 Hz	□	>0.5	IP23	30000h
8116	10W LED	3000K	350 lm	120 °	≥80	~220-230 V, 50/60 Hz	□	>0.5	IP23	30000h
8117	15W LED	3000K	500 lm	120 °	≥80	~220-230 V, 50/60 Hz	□	>0.5	IP23	30000h




VAN GOGH LED S 10286

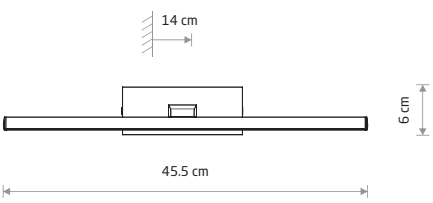


VAN GOGH LED S
painted aluminum, plastic PC

10289 10292 10286

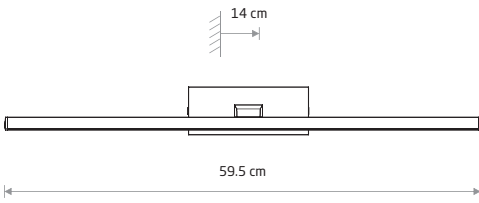

VAN GOGH LED M
painted aluminum, plastic PC

10288 10291 10285

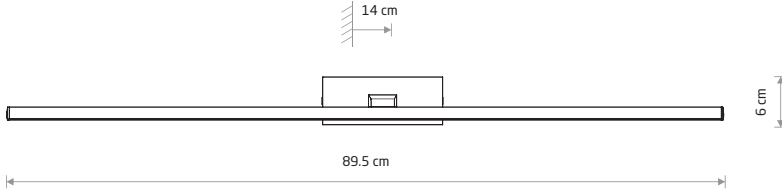


VAN GOGH LED L
painted aluminum, plastic PC

10287 10290 10284

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10289	9W LED	3000K	370 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10292	9W LED	3000K	430 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10286	9W LED	3000K	290 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10288	13W LED	3000K	490 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10291	13W LED	3000K	640 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10285	13W LED	3000K	430 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10287	18W LED	3000K	800 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10290	18W LED	3000K	940 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10284	18W LED	3000K	650 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h




VAN GOGH LED S 10286

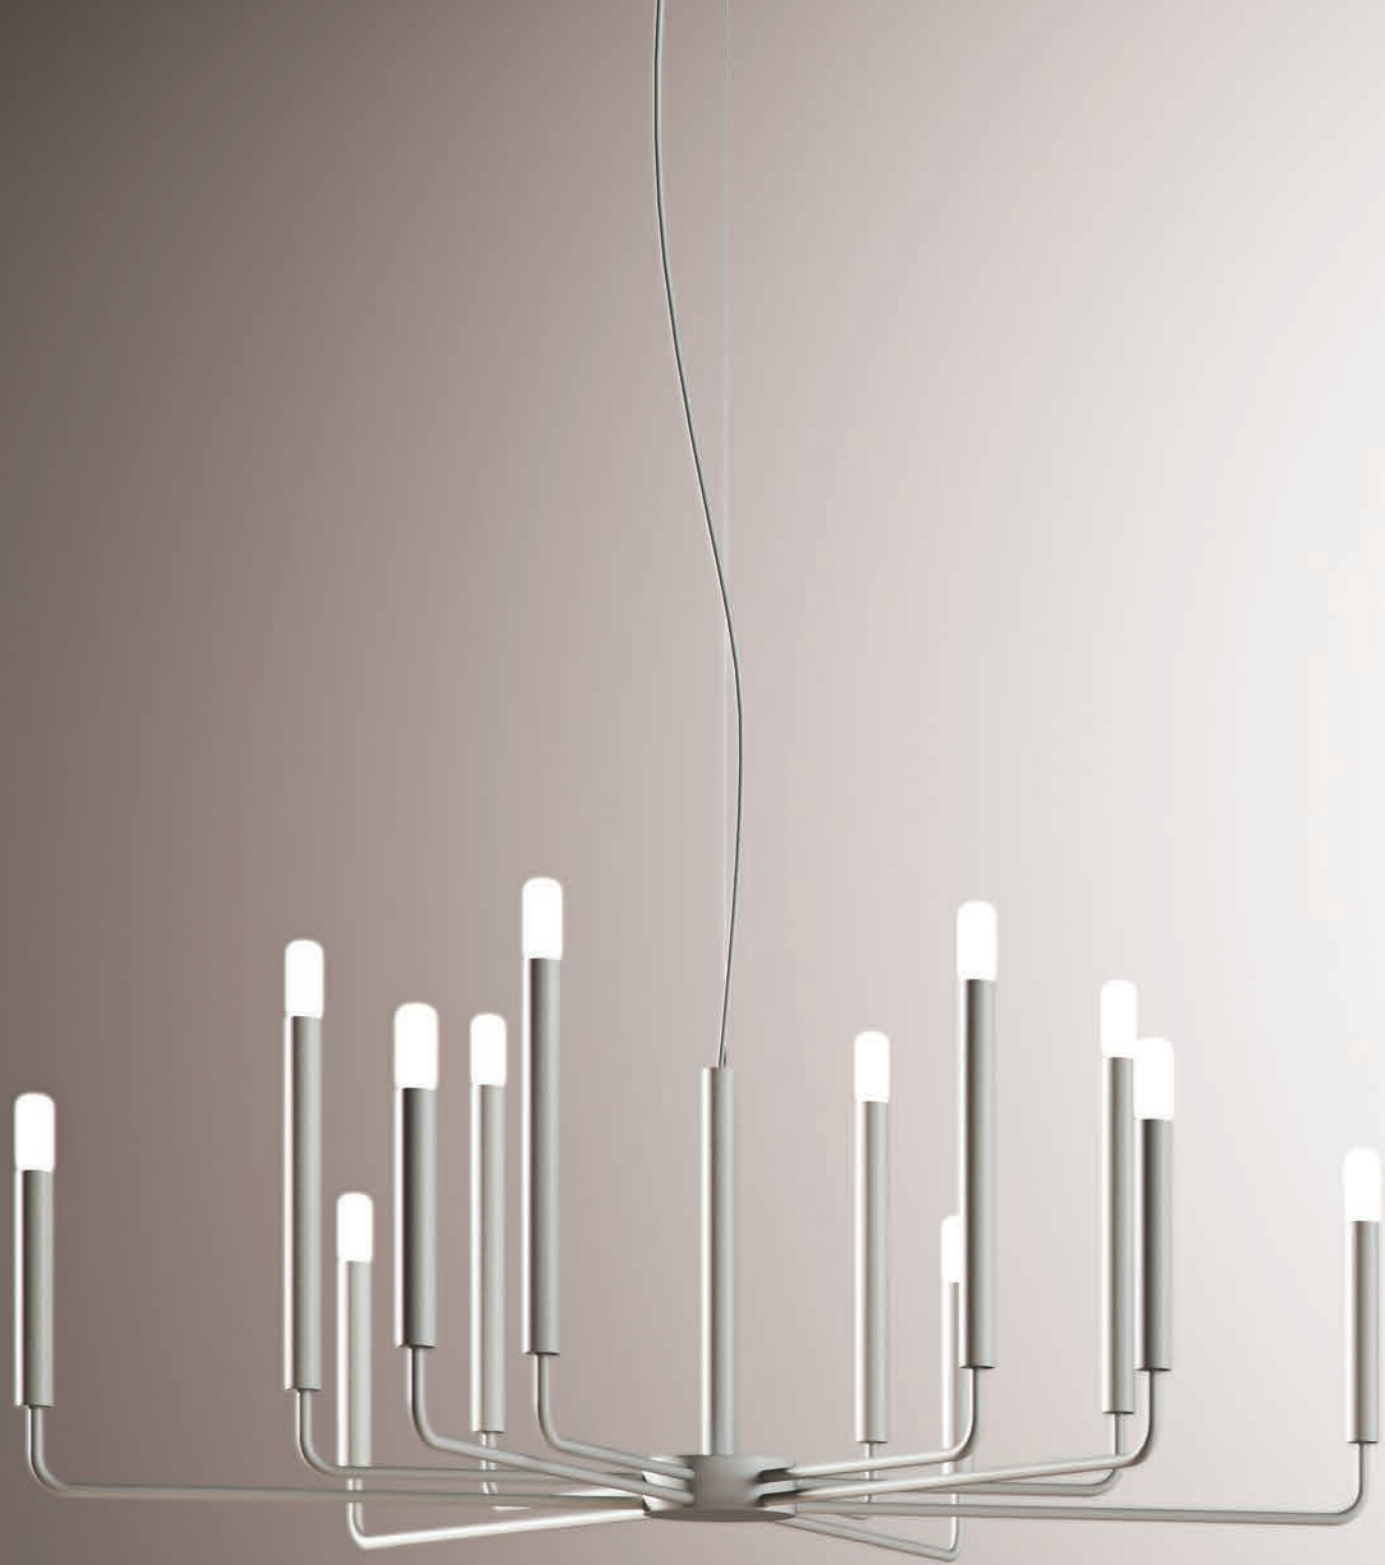



ORTO B 11464

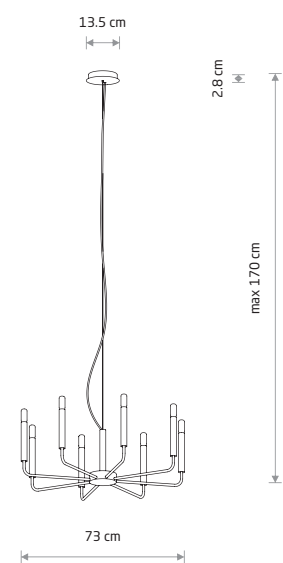

ORTO


■ painted steel

■ 11460 ■ 11461

● 8xE14, max 10W only LED

● BULB LED E14, T25, 4W

■ 11525 3000K

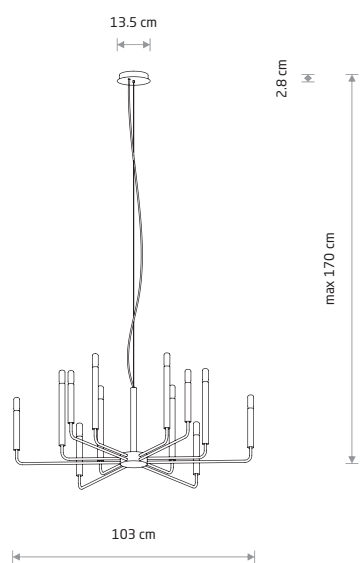

ORTO A


■ painted steel

■ 11462 ■ 11463


● 12xE14, max 10W only LED

● BULB LED E14, T25, 4W

■ 11525 3000K

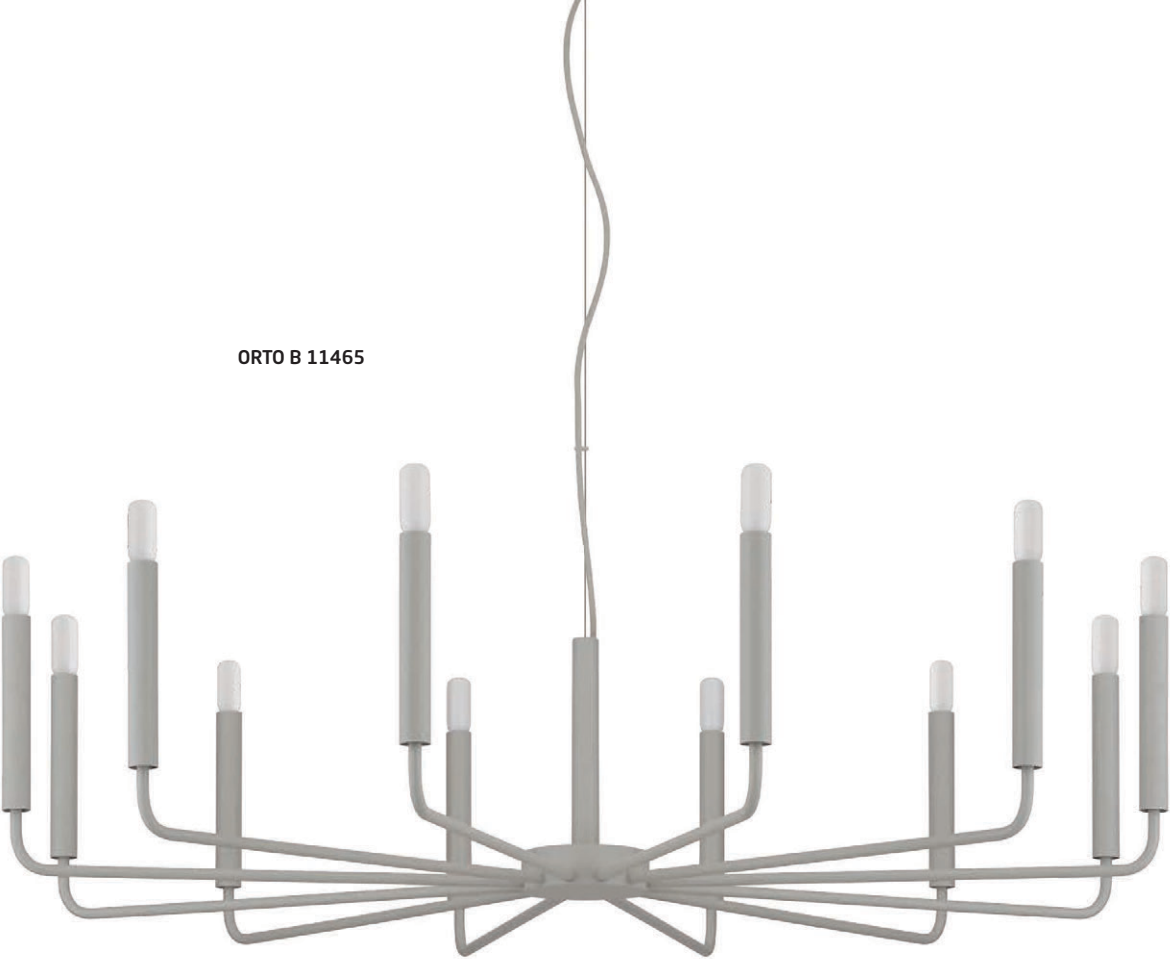

ORTO B 11465

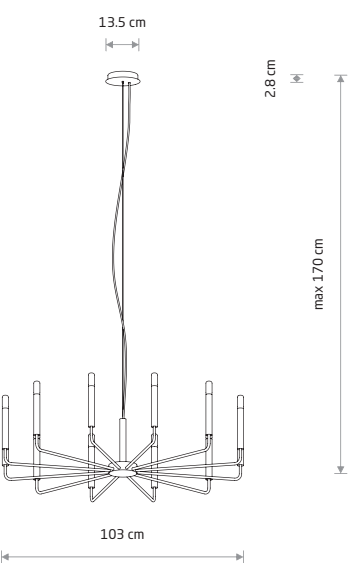

ORTO B

■ painted steel

■ 11464 ■ 11465

● 12xE14, max 10W only LED


● BULB LED E14, T25, 4W

■ 11525 3000K




■ BLACK P013 RAL 9005 ■ SILK GRAY P026 RAL 7044



LASER 490 10705

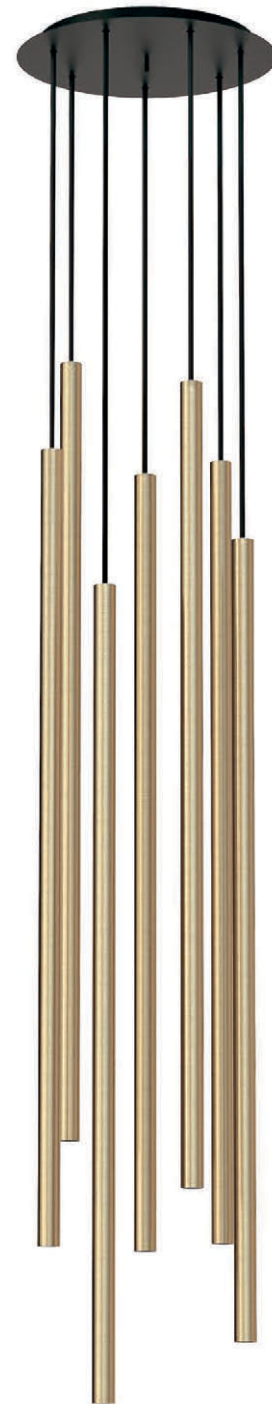

LASER 1000 7668

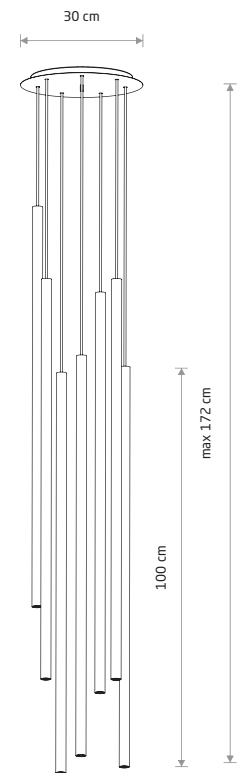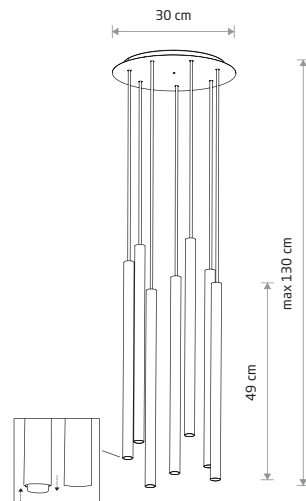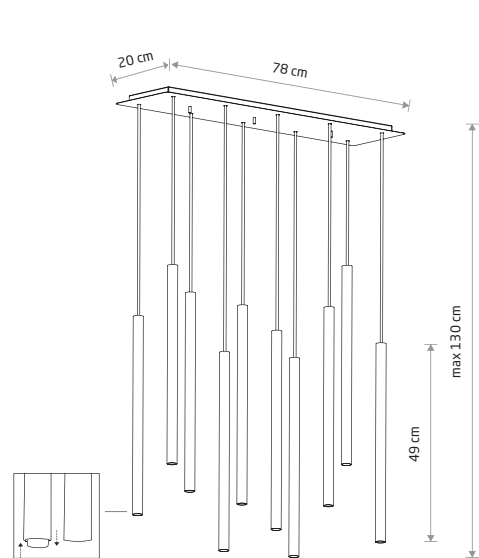

LASER 490

painting steel

8922 8923 10705

10xG9, max 10W only LED

solid brass, painting steel

8924

10xG9, max 10W only LED

LASER 490

painting steel

8918 8920 10704

7xG9, max 10W only LED

solid brass, painting steel

8921

7xG9, max 10W only LED

LASER 1000

painting steel

7667

7xG9, max 10W only LED


solid brass, painting steel

7668

7xG9, max 10W only LED



LASER 750 10910

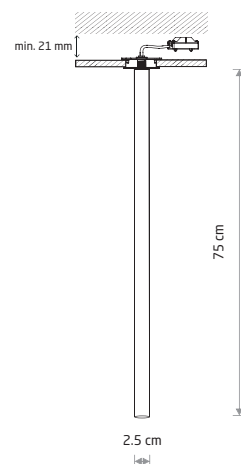

LASER 750

painting steel

10907 10910

1xG9, max 10W only LED




STALACTITE 9054



STALACTITE 8352



LASER 900 10915

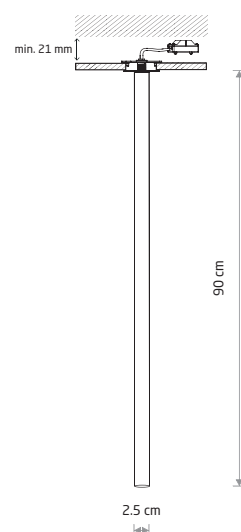


LASER 900

painting steel

10913 10915

1xG9, max 10W only LED

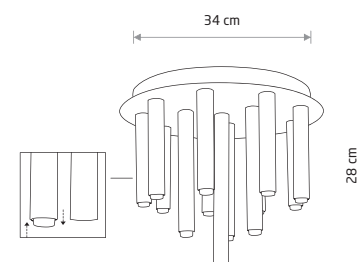

STALACTITE

painting steel


8355

13xG9, max 10W only LED

solid brass, painting steel

9054

13xG9, max 10W only LED



STALACTITE

painting steel, flexible stem

8351

1xG9, max 10W only LED


solid brass, painting steel, flexible stem

8352

1xG9, max 10W only LED



LASER WALL L 11814




LASER WALL L

painting steel

11813 11812

11814 11815

2xG9, max 10W only LED



LASER WALL

painting steel

8048 8047 10562


10564 10563

2xG9, max 10W only LED

solid brass, painting steel

8308

2xG9, max 10W only LED

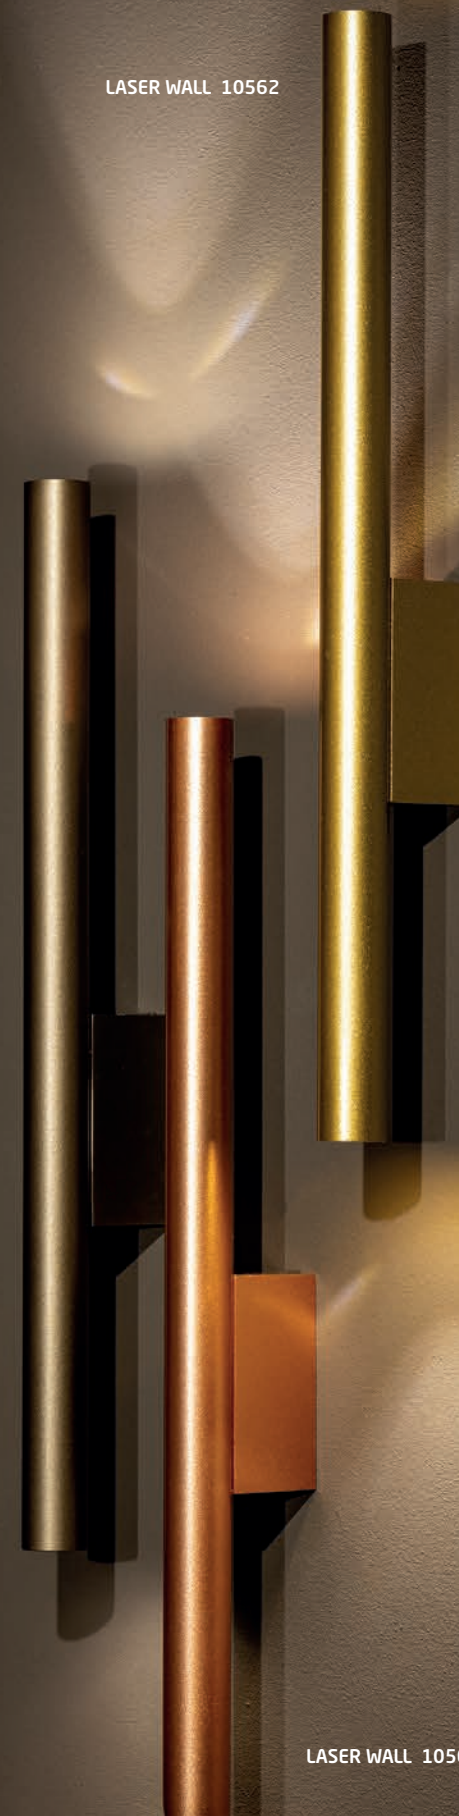


LASER WALL 10562

LASER WALL 10563

LASER WALL 10564







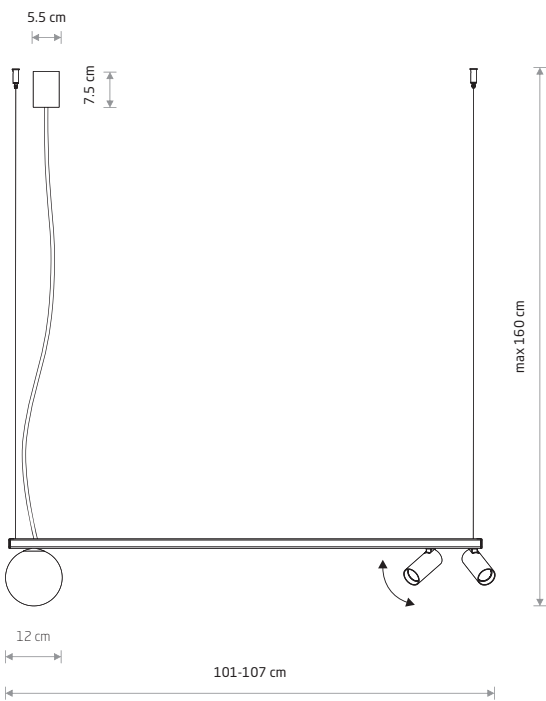







FOURTY
painted aluminum, glass, painted steel

- 11447 □ 11445
■ 11450 ■ 11471
- ⚡ 2xGU10 R35, 1xG9 max 10W only LED
- 💡 BULB LED G9, 4W
- 7503 3000K □ 7504 4000K

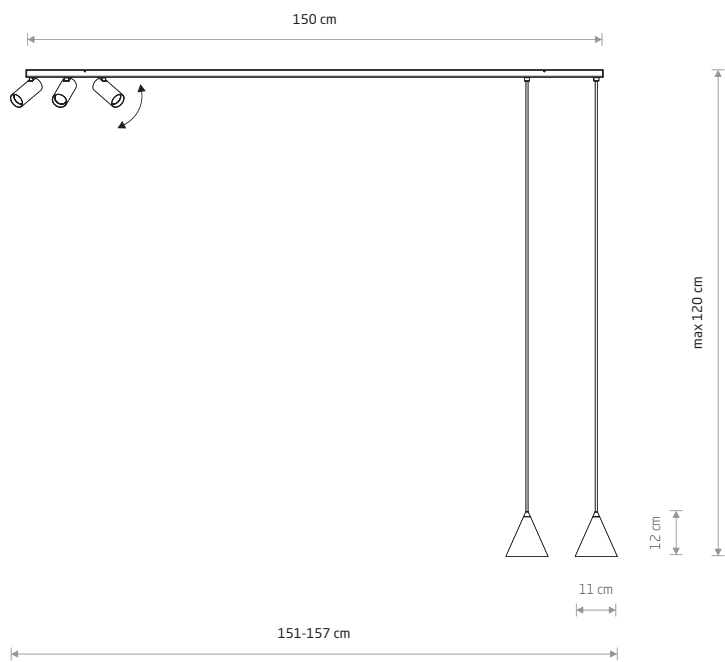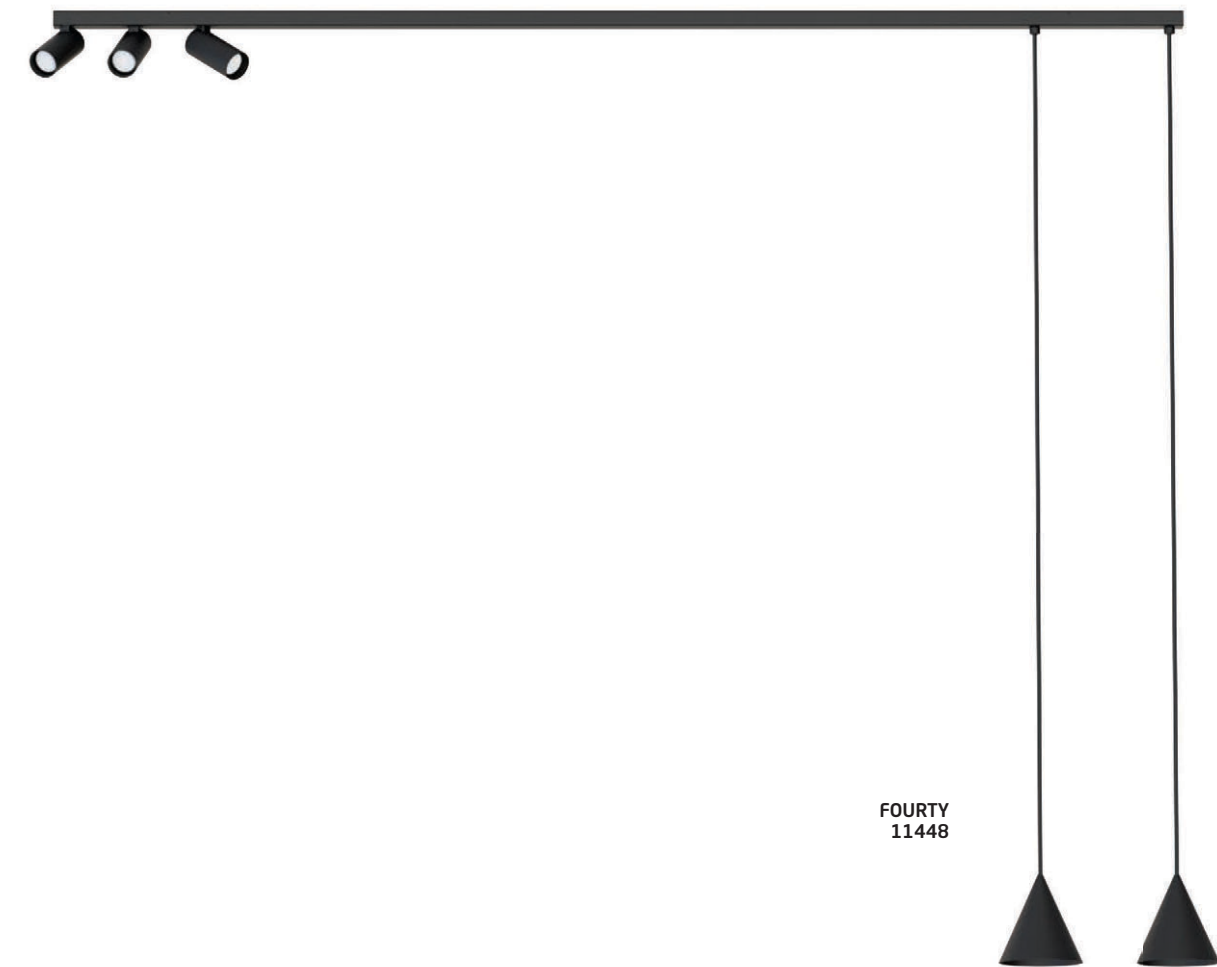


FOURTY
painted aluminum, painted steel

- 11448 □ 11446
■ 11451 ■ 11472
- ⚡ 5xGU10 R35, max 10W only LED
- ⚡ 2xGU10 R50, 3xGU10 R35 max 10 W only LED

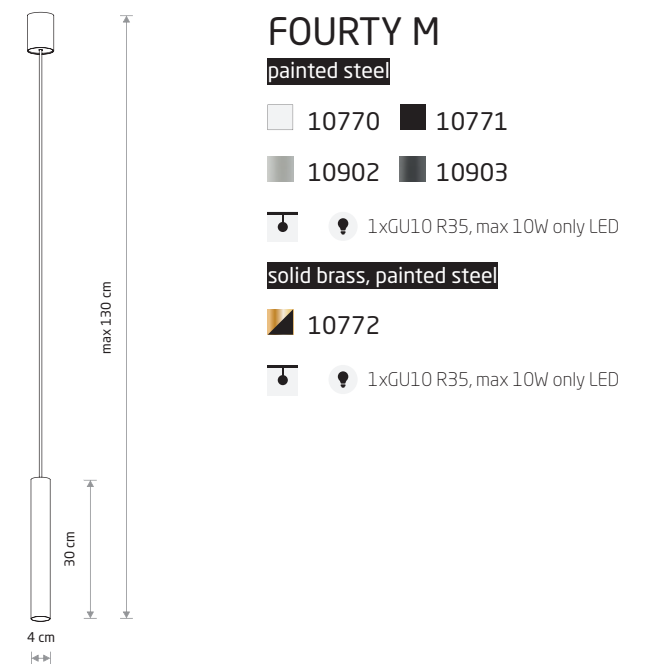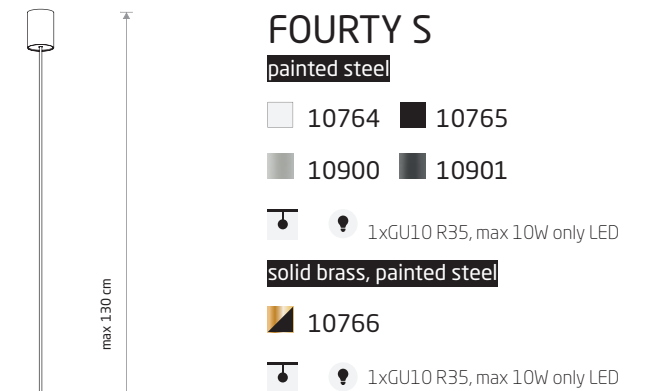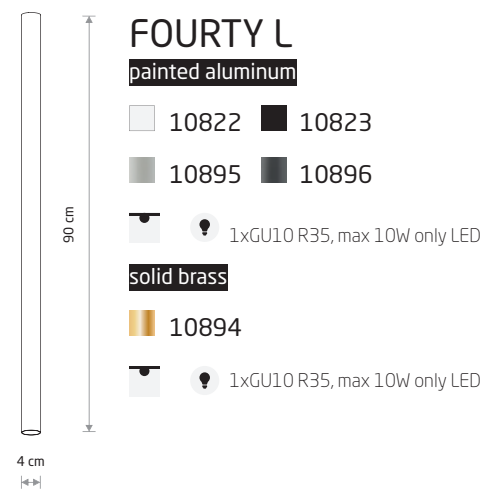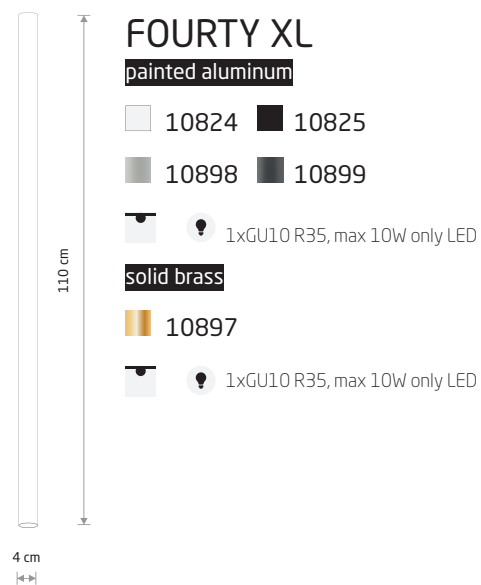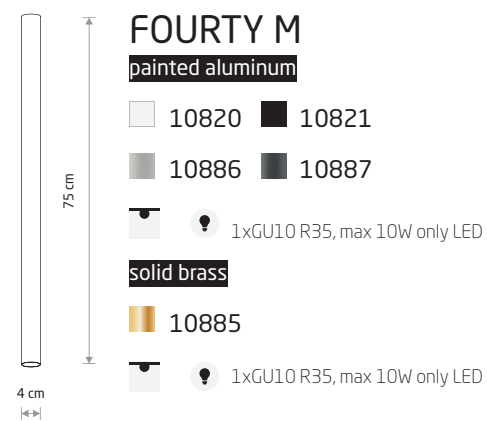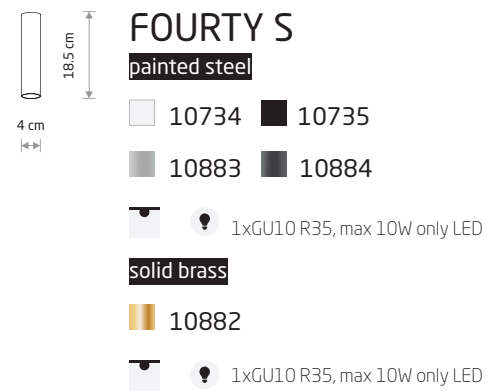



FOURTY 11766



FOURTY

painting steel


11763 11764

11765 11766

1xGU10 R35, max 10W only LED



FOURTY WALL S 10746



FOURTY WALL S

painting steel

10746 10747

10888 10889

1xGU10 R35, max 10W only LED


solid brass, painting steel

10748

1xGU10 R35, max 10W only LED



FOURTY WALL M 10891

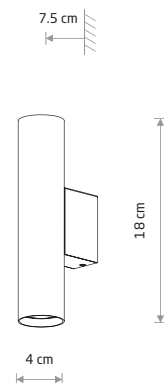

FOURTY WALL M

painting steel

10752 10753


10890 10891

2xGU10 R35, max 10W only LED

solid brass, painting steel

10754

2xGU10 R35, max 10W only LED

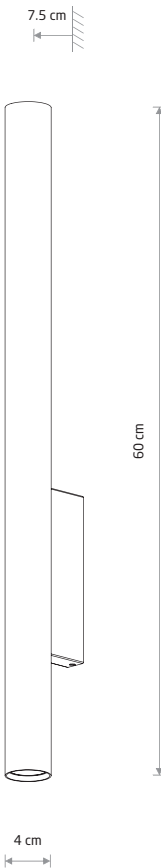

FOURTY WALL XL

painting steel

10758 10759

10892 10893

2xGU10 R35, max 10W only LED

solid brass, painting steel

10760


2xGU10 R35, max 10W only LED

FOURTY WALL XL 10759



Scan QR code to watch video manual
how to change the bulb.

FOURTY SURFACE
11442



FOURTY SURFACE

■ painted steel


■ 11442 ■ 11443

■ 11444 ■ 11473

■ 2xGU10 R35, max 10W only LED

■ cut out 95 x 30 mm

FOURTY
10737



FOURTY


■ painted aluminum, painted steel

■ 10737 ■ 11433

■ 11437 ■ 11466

■ 2xGU10 R35, max 10W only LED

FOURTY
10739

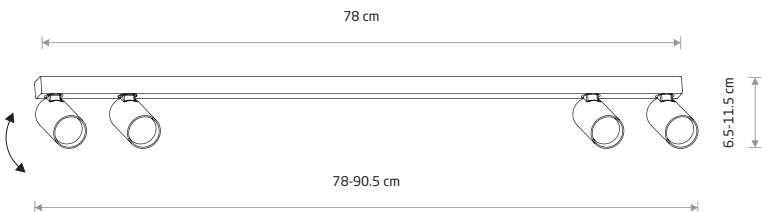

FOURTY


■ painted aluminum, painted steel

■ 10739 ■ 11434

■ 11438 ■ 11467

■ 4xGU10 R35, max 10W only LED

FOURTY
10741

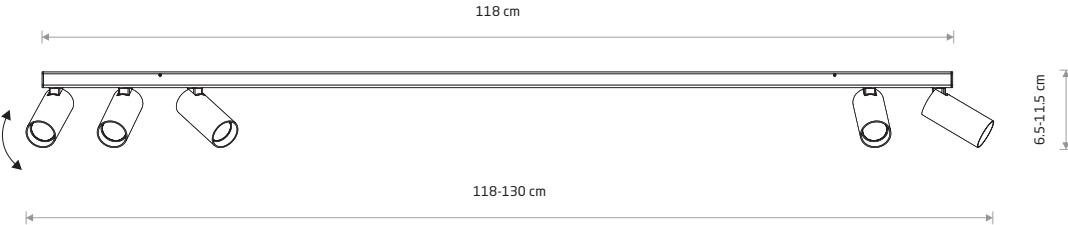

FOURTY


■ painted aluminum, painted steel

■ 10741 ■ 11435

■ 11440 ■ 11468

■ 5xGU10 R35, max 10W only LED

FOURTY
10743

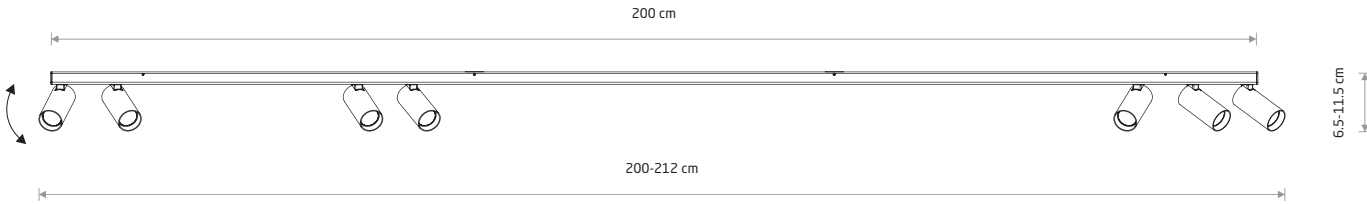

FOURTY

■ painted aluminum, painted steel

■ 10743 ■ 11436

■ 11441 ■ 11470





■ 7xGU10 R35, max 10W only LED



MONO 7708

Visualisation by Iwona Ligeza

3 warianty kolekcji MONO /
3 variants of the MONO collection



MONO



MONO SURFACE



MONO DEEP



Filtr przeciwoślnieniowy "plaster miodu".
Do zastosowania z kolekcją lamp MONO.

Anti-glare "honeycomb".
For use with the MONO lamp collection.

Scan QR code to watch video manual
on changing the bulb.





Visualisation by Iwona Ligęza



HONEY COMB 11427




MONO S 10777
HONEY COMB 11427



MONO S 10784
HONEY COMB 11427



MONO S 10779
HONEY COMB 11427



MONO S

painted steel

- 10776 10777 10778
- 10779 10781 10782
- 10783 10784 10785
- 10786

1xGU10 R50, max 10W only LED

solid brass


- 10780

1xGU10 R50, max 10W only LED

WHITE P004 RAL 9003 GOLD P021 BLACK P013 RAL 9005

BRASS SATINE COPPER P024 SATINE GOLD P023 SATINE CHOCOLATE P025 RAL 8017 SILK GRAY P026 RAL 7044 UMBRA GRAY P027 RAL 7022

MONO 7807

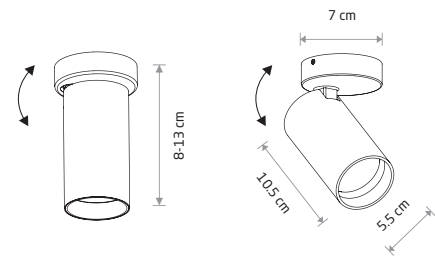

MONO

painting steel, plastic ABS

7807 7838

7771 7763


1xGU10 R50, max 10W only LED

solid brass, painting steel, plastic ABS

7778

1xGU10 R50, max 10W only LED

MONO 7810



MONO

painting steel, plastic ABS

7810 7841

7774 7766


2xGU10 R50, max 10W only LED

solid brass, painting steel, plastic ABS

7782

2xGU10 R50, max 10W only LED

MONO 7811

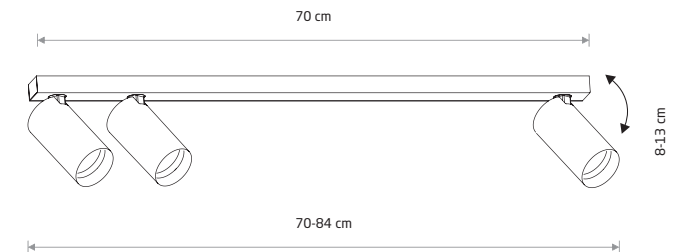

MONO

painting steel, plastic ABS

7811 7842

7775 7767


3xGU10 R50, max 10W only LED

solid brass, painting steel, plastic ABS

7783

3xGU10 R50, max 10W only LED

MONO 7812

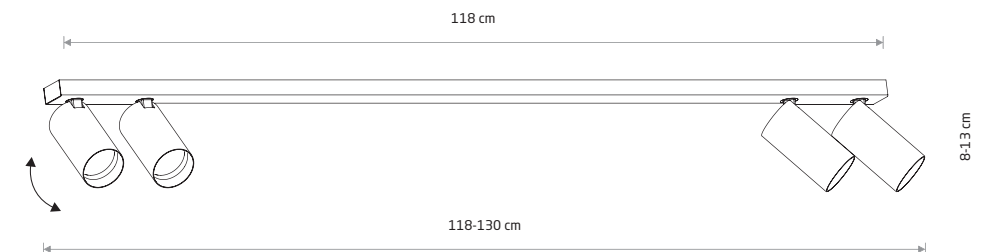

MONO

painting steel, plastic ABS

7812 7843

7776 7768

4xGU10 R50, max 10W only LED

solid brass, painting steel, plastic ABS

7784

4xGU10 R50, max 10W only LED



MONO CORNER 2X150
7721

MONO 7708

Visualisation by Iwona Ligeza

MONO

painted steel, plastic ABS

7813 7844


7777 7770

6xGU10 R50, max 10W only LED

solid brass, painted steel, plastic ABS

7785

6xGU10 R50, max 10W only LED

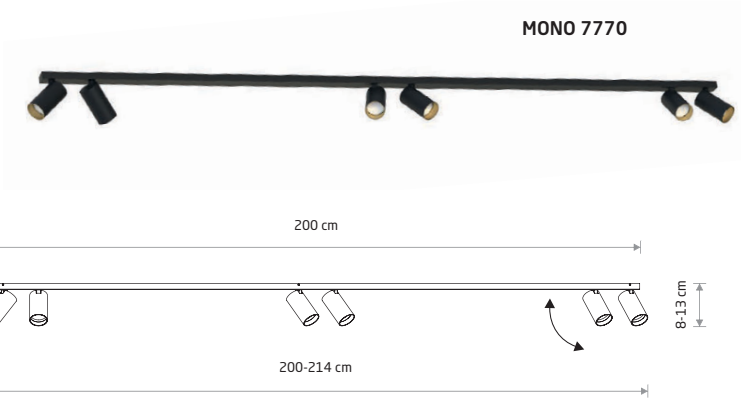

MONO 2X150

painted steel, plastic ABS

7750 7720



7694 7698

8xGU10 R50, max 10W only LED

solid brass, painted steel, plastic ABS

7754

8xGU10 R50, max 10W only LED

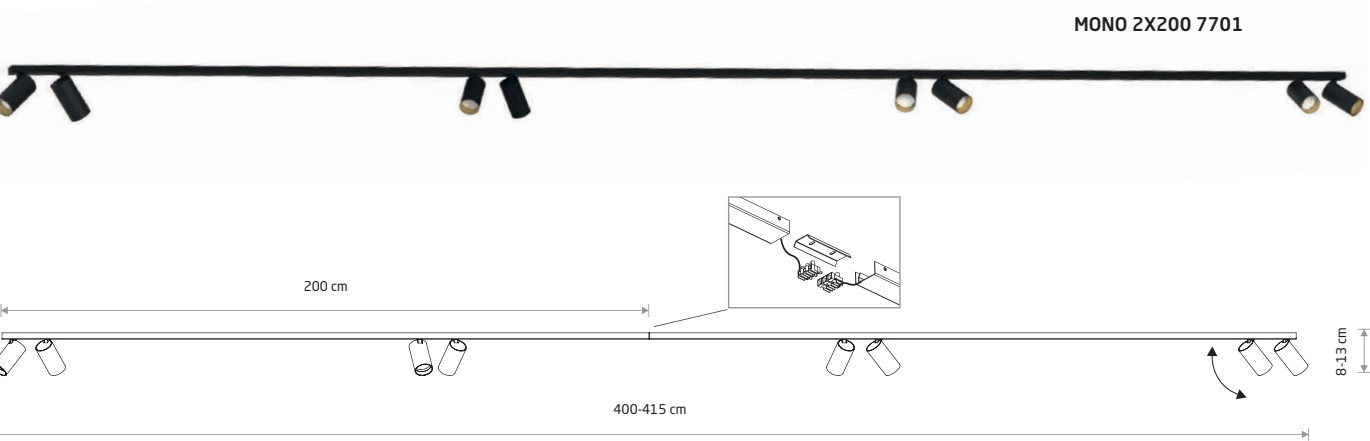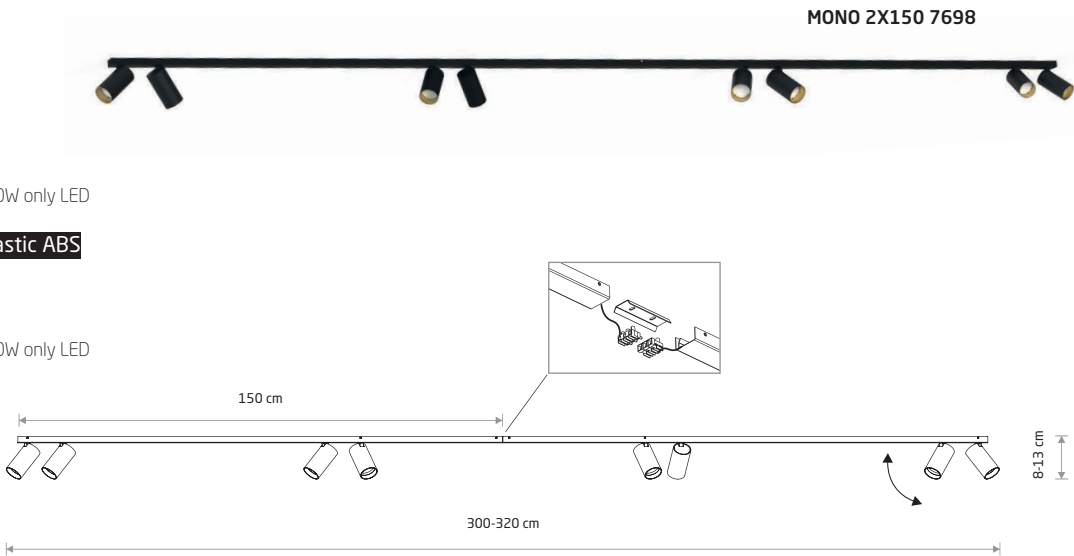


MONO 2X200

painted steel, plastic ABS

7752 7722

7696 7701

8xGU10 R50, max 10W only LED

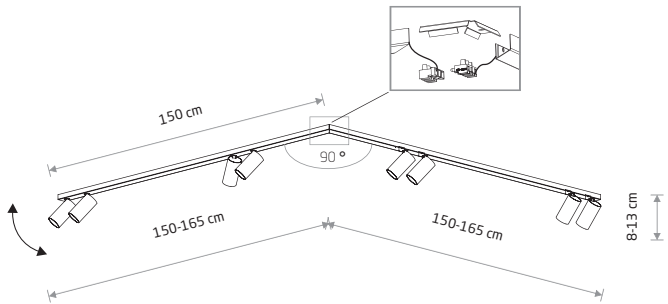

MONO CORNER 2X150

painted steel, plastic ABS

7751 7721


7695 7700

8xGU10 R50, max 10W only LED

solid brass, painted steel, plastic ABS

7755

8xGU10 R50, max 10W only LED

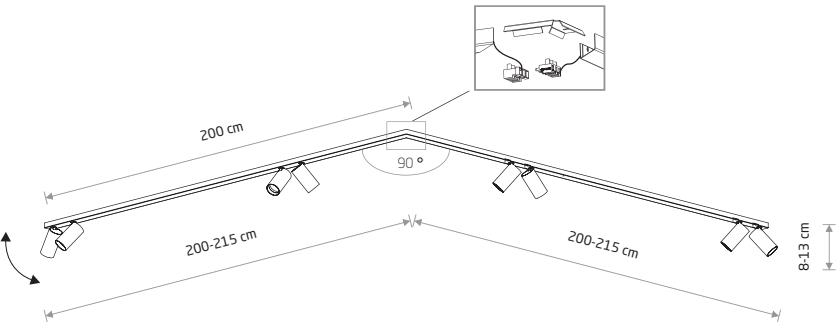

MONO CORNER 2X200

painted steel, plastic ABS


7753 7723

7697 7702

8xGU10 R50, max 10W only LED





MONO LONG 7728

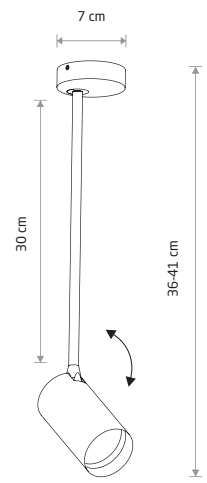

MONO LONG M
painted steel, plastic ABS

- 7725 7728
- 7671 7674

1xGU10 R50, max 10W only LED



MONO 7786


MONO
painted steel, plastic ABS

- 7787 7786

1xGU10 R50, max 10W only LED





MONO LONG 7730

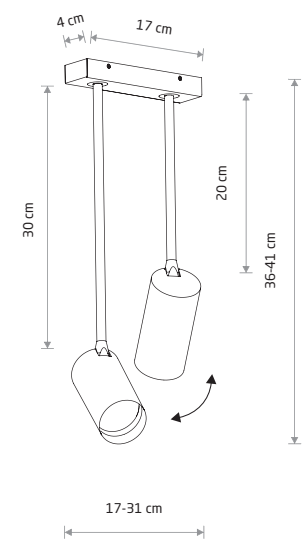

MONO LONG
painted steel, plastic ABS

- 7726 7730
- 7672 7675

2xGU10 R50, max 10W only LED



MONO 7840

MONO
painted steel, plastic ABS

- 7808 7840
- 7772 7764

1xGU10 R50, max 10W only LED

solid brass, painted steel, plastic ABS

- 7780

1xGU10 R50, max 10W only LED


MONO SURFACE 7833



MONO SURFACE
painted steel, plastic ABS

- 7827 7833
7683 7688

- 1xGU10 R50, max 10W only LED
cut out $\varnothing$ 35 mm

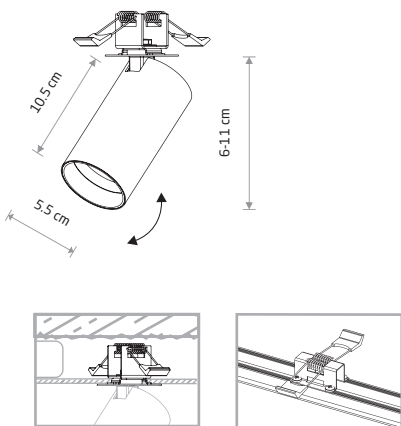


MONO SURFACE 7834




MONO SURFACE
painted steel, painted aluminum, plastic ABS

- 7828 7834

- 2xGU10 R50, max 10W only LED
cut out 160x31 mm

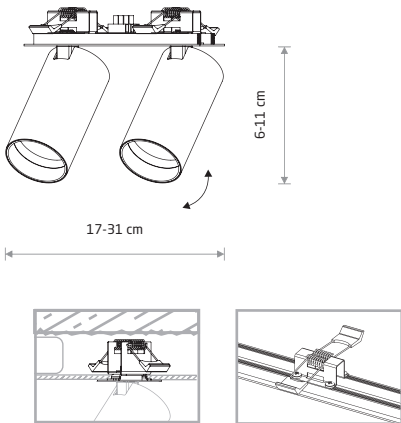

MONO SURFACE 7635

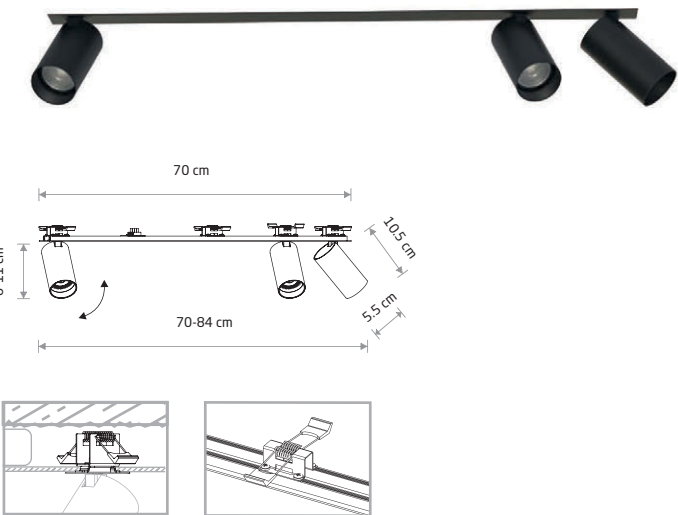


MONO SURFACE

painted steel, painted aluminum, plastic ABS

- 7830 7835

- 3xGU10 R50, max 10W only LED
cut out 690x31 mm

MONO SURFACE 7836

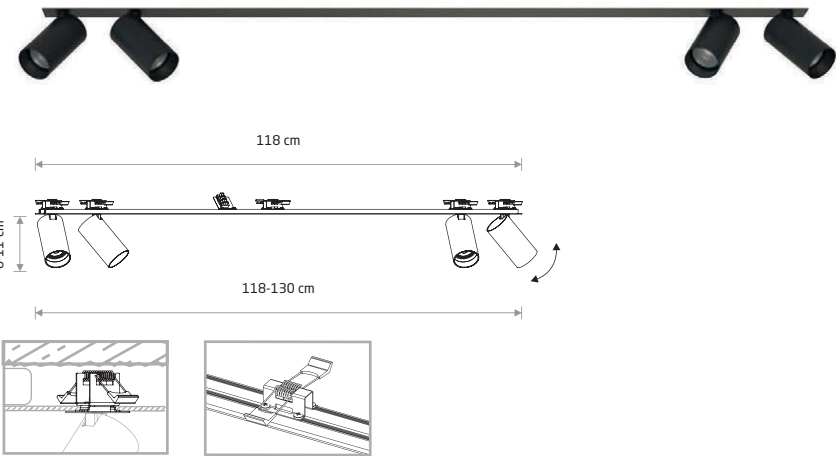


MONO SURFACE

painted steel, painted aluminum, plastic ABS

- 7831 7836

- 4xGU10 R50, max 10W only LED
cut out 1170x31 mm

MONO SURFACE 7837

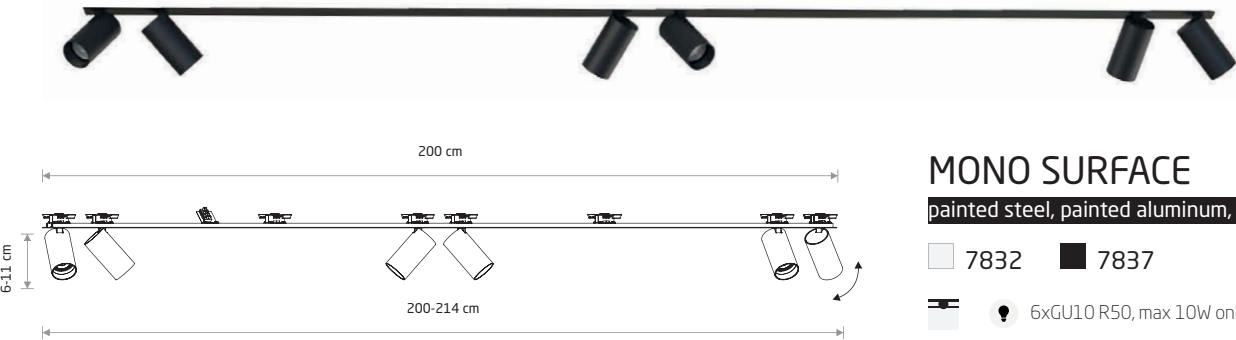

MONO SURFACE



painted steel, painted aluminum, plastic ABS

- 7832 7837

- 6xGU10 R50, max 10W only LED
cut out 1990x31 mm



MONO DEEP 10460

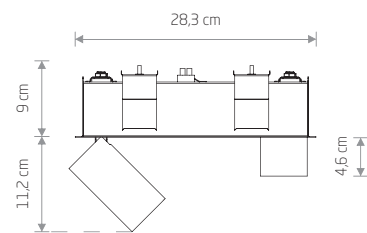

MONO DEEP



painting steel, plastic PC

10465 10460

2xGU10 R50, max 10W only LED

cut out 64x268 mm

MONO DEEP 10463

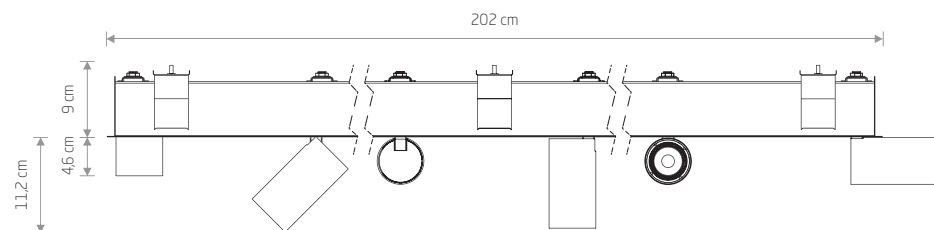

MONO DEEP

painting steel, plastic PC

10468 10463

6xGU10 R50, max 10W only LED


cut out 64x2002 mm



MONO SLIDE 10796



MONO SLIDE TRIMLESS 10803



MONO SLIDE

painting steel, plastic PA


10795 10796 10797

10798 10799 10800

10801

1xGU10 R50, max 10W only LED

cut out ø 76 mm

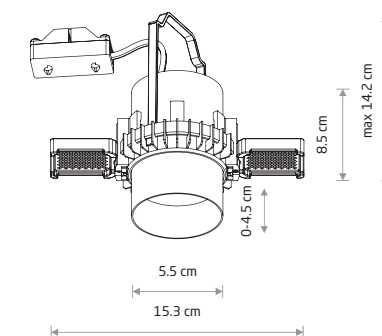

MONO SLIDE TRIMLESS

painting steel, plastic PA, plastic ABS

10802 10803 10804


10805 10806 10807

1xGU10 R50, max 10W only LED

cut out ø 76 mm

WHITE P004 RAL 9003 BLACK P013 RAL 9005

WHITE P004 RAL 9003 BLACK P013 RAL 9005 GOLD P021 SATINE GOLD P023 SATINE CHOCOLATE P025 RAL 8017 SATINE COPPER P024

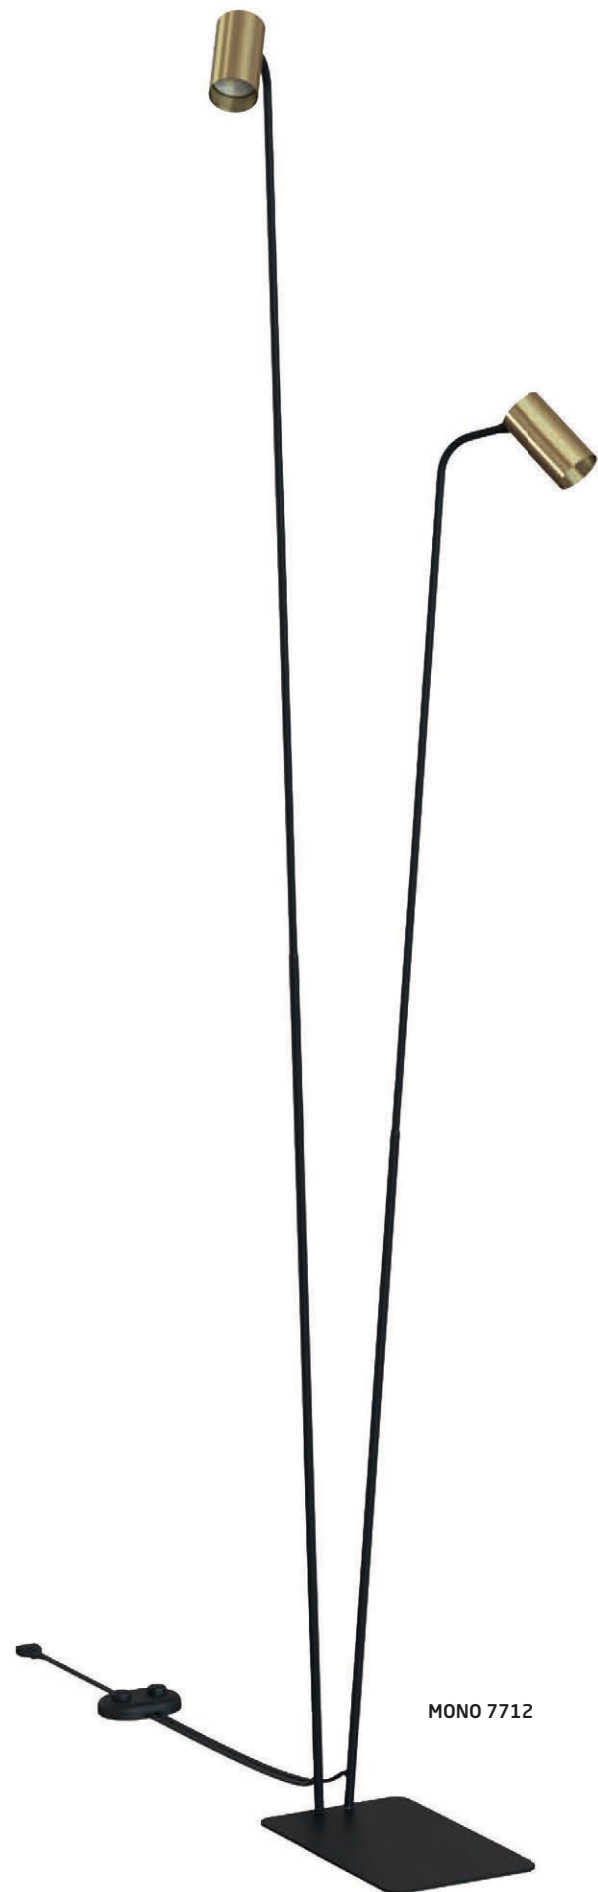

MONO 7712



MONO

painting steel, plastic ABS

7705 7708

7715 7718


2xGU10 R50, max 10W only LED

solid brass, painting steel, plastic ABS


7712

2xGU10 R50, max 10W only LED

WHITE P004 RAL 9003 BLACK P013 RAL 9005 BRASS GOLD P021

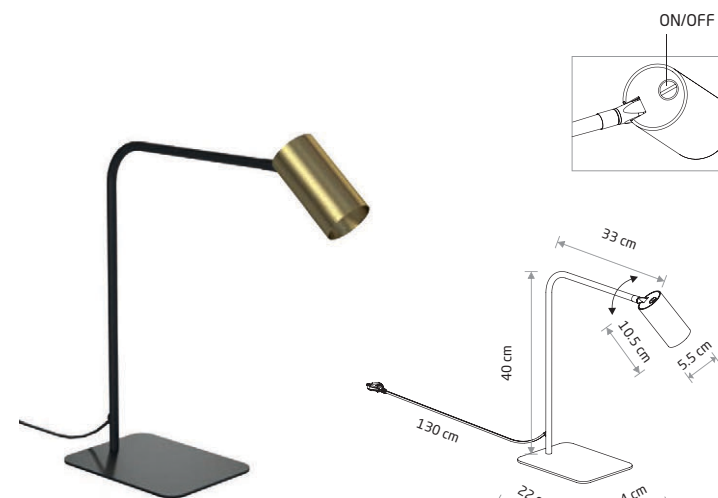

MONO 7710

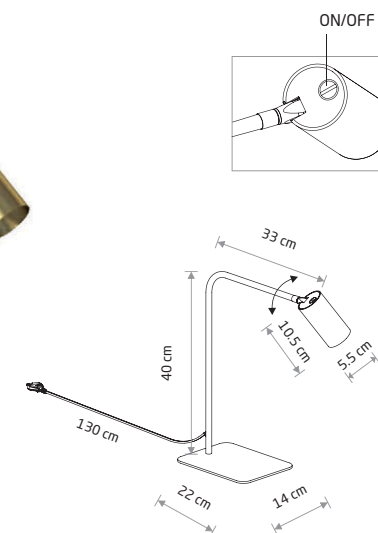

MONO

painting steel, plastic ABS

7703 7706

7713 7716

1xGU10 R50, max 10W only LED


solid brass, painting steel, plastic ABS

7710

1xGU10 R50, max 10W only LED



MONO 7711

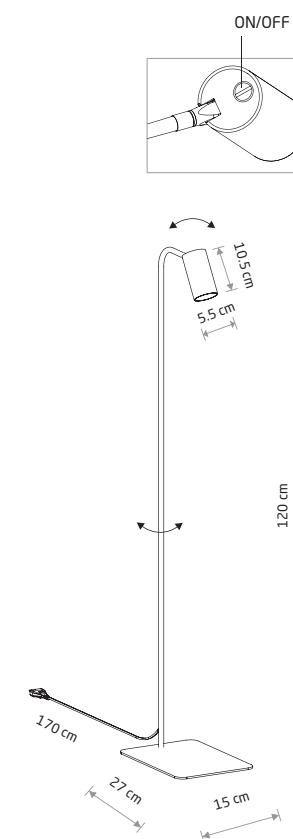

MONO

painting steel, plastic ABS

7704 7707

7714 7717

1xGU10 R50, max 10W only LED

solid brass, painting steel, plastic ABS

7711

1xGU10 R50, max 10W only LED


WHITE P004 RAL 9003 BLACK P013 RAL 9005 BRASS GOLD P021



EYE M 5397

EYE L 6841

EYE L 8800



EYE M

5397

 6840




1xGU10 R50, max 10W only LED

8914



1xGU10 R50, max 10W only LED



EYE L

5455

 6841



1xGU10 R50, max 10W only LED


8800



1xGU10 R50, max 10W only LED



EYE 7863

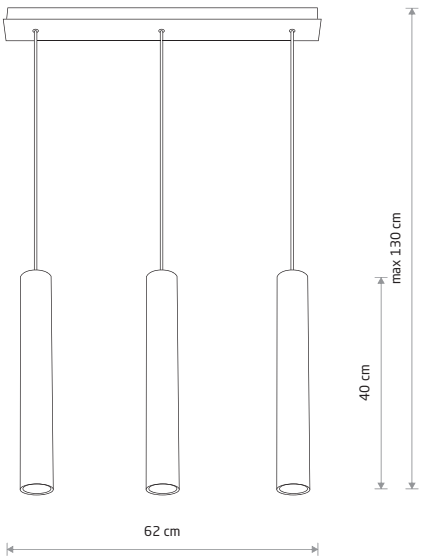

EYE

6481

 7862



3xGU10 R50, max 10W only LED


7863



3xGU10 R50, max 10W only LED



EYE L 8916

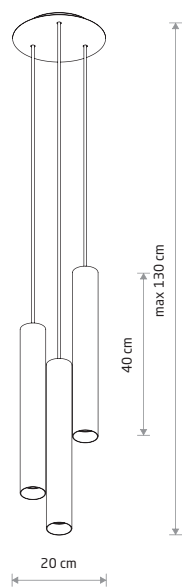

EYE L

painting steel

8916 8917

3xGU10 R50, max 10W only LED

solid brass, painting steel

8915


3xGU10 R50, max 10W only LED

EYE L 8915



BATON 7851

BATON 7852

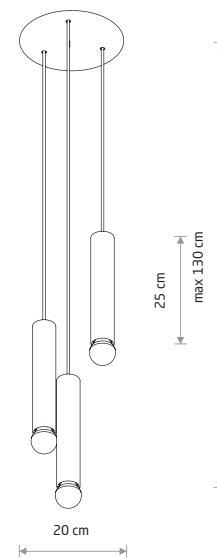

BATON

painting steel

7852

1xE27, max 10W only LED

solid brass, painting steel

7851

1xE27, max 10W only LED

BATON 7856



BATON

painting steel


7856

3xE27, max 10W only LED

solid brass, painting steel

7855

3xE27, max 10W only LED

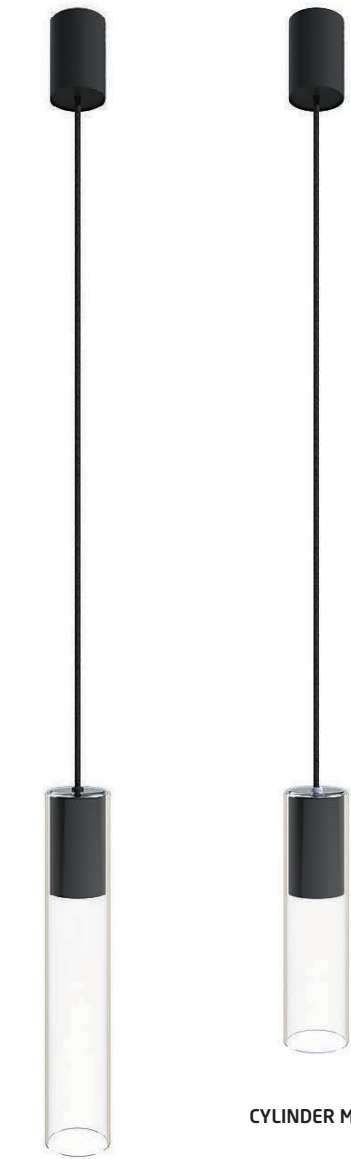

CYLINDER L 7864

CYLINDER M 7865



CYLINDER M

glass, painted steel

7865

1xGU10 R50, max 10W only LED

glass, solid brass, painted steel

7868

1xGU10 R50, max 10W only LED



CYLINDER L

glass, painted steel


7864

1xGU10 R50, max 10W only LED

glass, solid brass, painted steel

7867

1xGU10 R50, max 10W only LED



EYE S

painted steel

5255 6836

1xGU10 R50, max 10W only LED

solid brass

8911

1xGU10 R50, max 10W only LED



EYE M

painted steel


5463 6837

1xGU10 R50, max 10W only LED

solid brass

8912

1xGU10 R50, max 10W only LED



EYE L

painted steel

5471 6838

1xGU10 R50, max 10W only LED

solid brass

8913

1xGU10 R50, max 10W only LED




EYE M 5463



EYE L 6838



EYE 6842

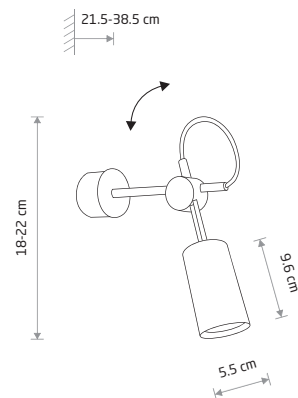

EYE

painting steel

5654 6842

1xGU10 R50, max 10W only LED

EYE FLEX S

painting steel, flexible stem


9070 9068

1xGU10 R50, max 10W only LED

solid brass, flexible stem, painting steel

9067


1xGU10 R50, max 10W only LED

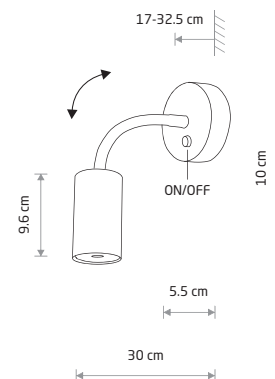

EYE FLEX S 9067



EYE WALL 8072

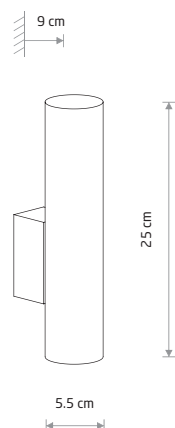

EYE WALL

painting steel

8073 8072

2xGU10 R50, max 10W only LED


solid brass, painting steel

8074

2xGU10 R50, max 10W only LED



EYE WALL CUT 7995

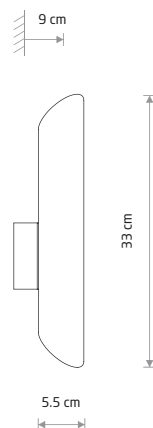

EYE WALL CUT

painting steel

7993 7994

2xGU10 R50, max 10W only LED

solid brass, painting steel

7995


2xGU10 R50, max 10W only LED

EYE FLEX

painting steel, flexible stem

8934 8935


1xGU10 R50, max 10W only LED

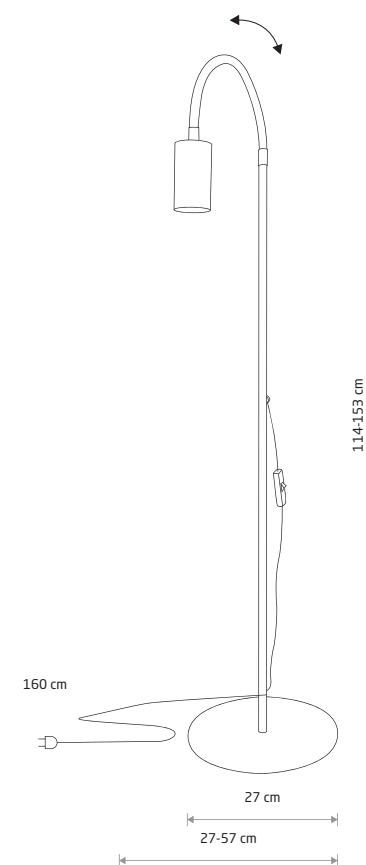

EYE FLEX 8935



EYE SPOT 6018



EYE SPOT

■ painted steel, chrome


■ 6014 ■ 6018

● 1xGU10 R50, max 10W only LED


■ solid brass, painted steel

■ 8816

● 1xGU10 R50, max 10W only LED



EYE SPOT 6611

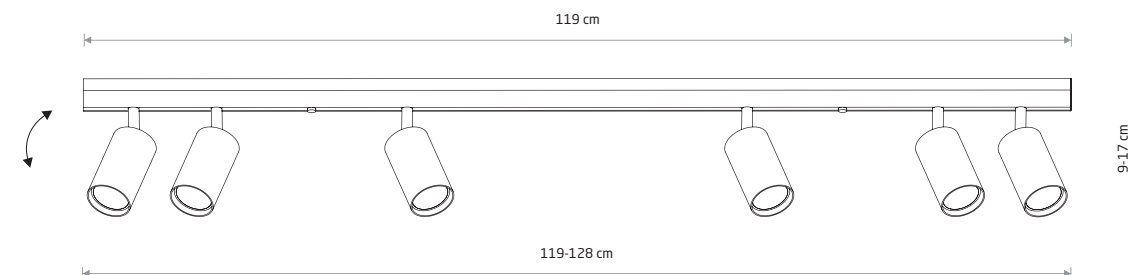

EYE SPOT

■ painted steel, chrome

■ 6607 ■ 6611

● 6xGU10 R50, max 10W only LED

■ solid brass, painted steel

■ 8819

● 6xGU10 R50, max 10W only LED



EYE SPOT 6020

EYE SPOT

■ painted steel, chrome


■ 6015 ■ 6020

● 2xGU10 R50, max 10W only LED

■ solid brass, painted steel

■ 8817

● 2xGU10 R50, max 10W only LED

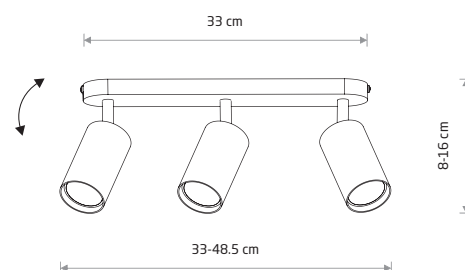

EYE SPOT 6021

EYE SPOT

■ painted steel, chrome

■ 6016 ■ 6021

● 3xGU10 R50, max 10W only LED


■ solid brass, painted steel

■ 8818

● 3xGU10 R50, max 10W only LED



EYE SPOT 6022

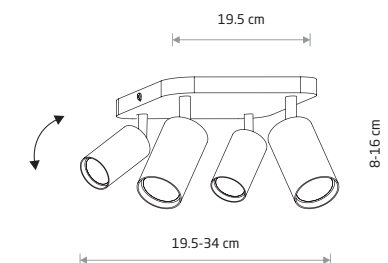

EYE SPOT

■ painted steel, chrome

■ 6017 ■ 6022



● 4xGU10 R50, max 10W only LED

■ solid brass, painted steel

■ 8820

● 4xGU10 R50, max 10W only LED

EYE SUPER 6506

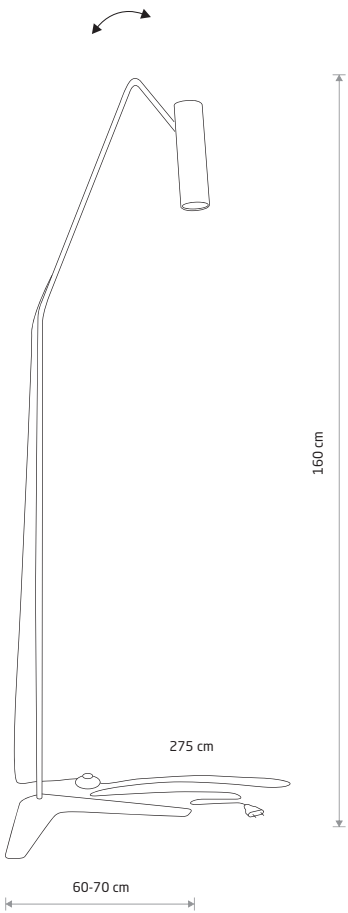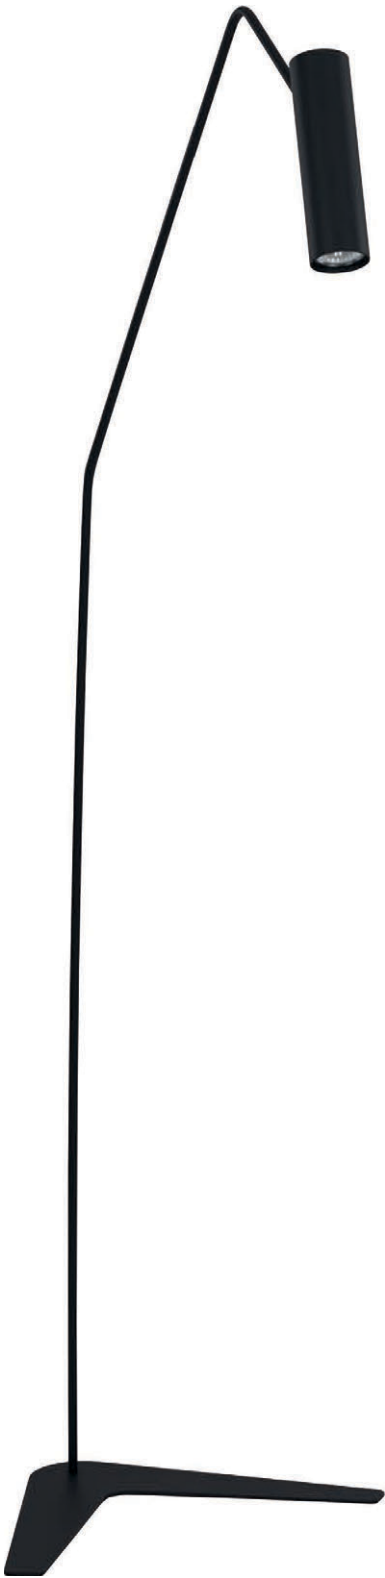


EYE SUPER
painted steel

6493 6506

1xGU10 R50, max 10W only LED



EYE SUPER B 6490

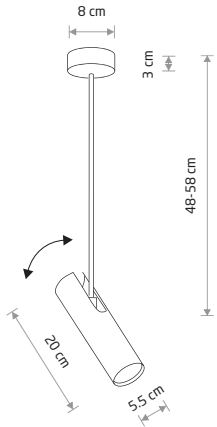


EYE SUPER A

painted steel

6488 6502

1xGU10 R50, max 10W only LED

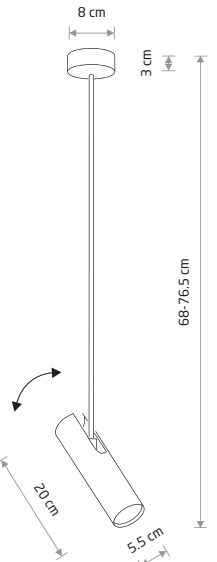

EYE SUPER B


painted steel

6490 6503

1xGU10 R50, max 10W only LED



EYE SUPER 6501

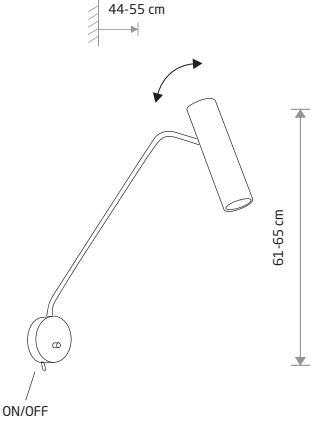




EYE SUPER

painted steel, chrome

6487 6501

1xGU10 R50, max 10W only LED

EYE SUPER 6491

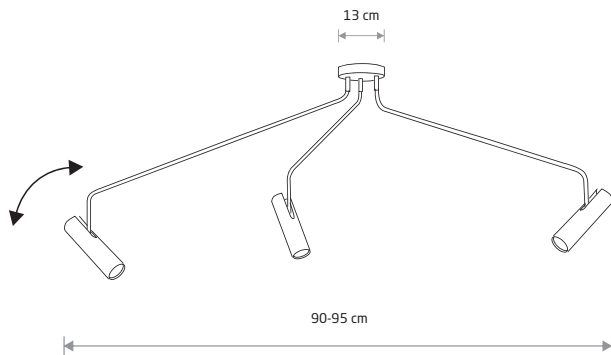

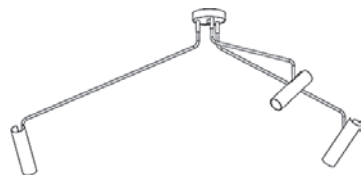


EYE SUPER
painted steel, chrome

6491 6504

3xGU10 R50, max 10W only LED


EYE SUPER 6505

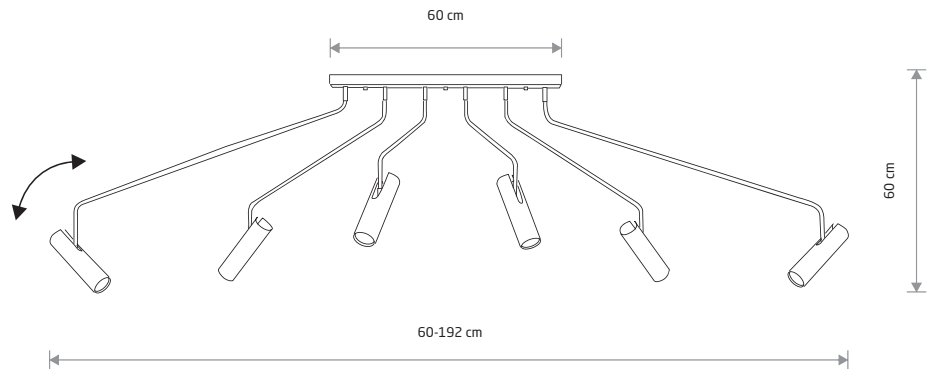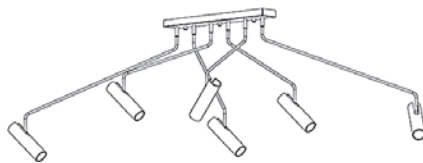

EYE SUPER
painted steel, chrome

6492 6505


6xGU10 R50, max 10W only LED

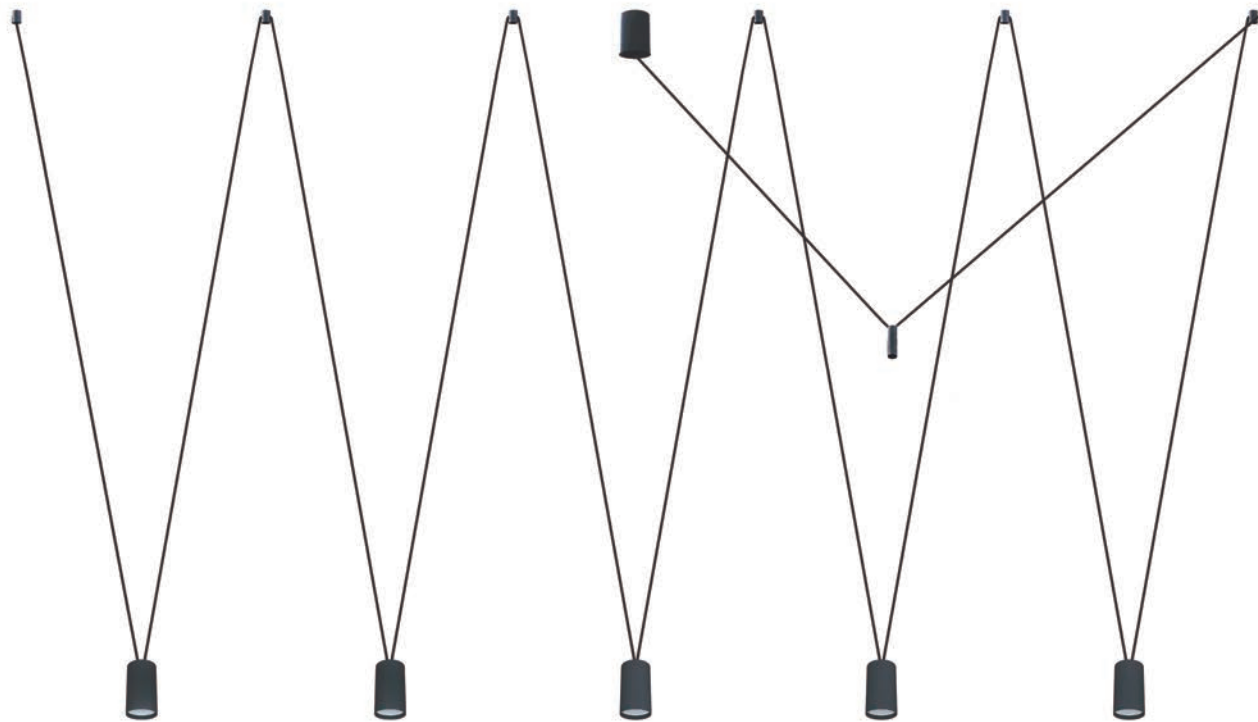

MORE EYE 7825




MORE TONE 7817

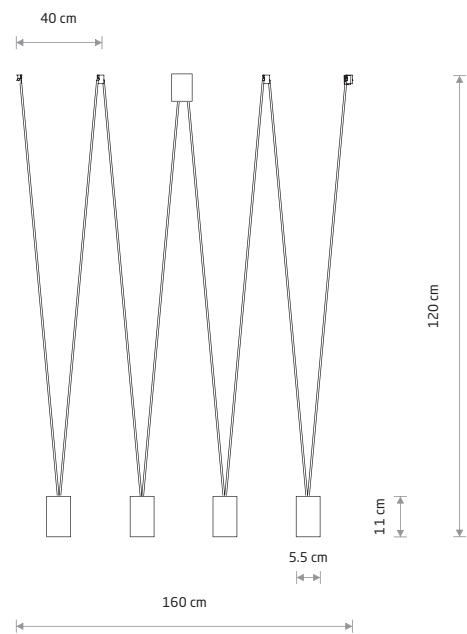

MORE EYE
painted steel

7822


4xGU10 R50, max 10W only LED

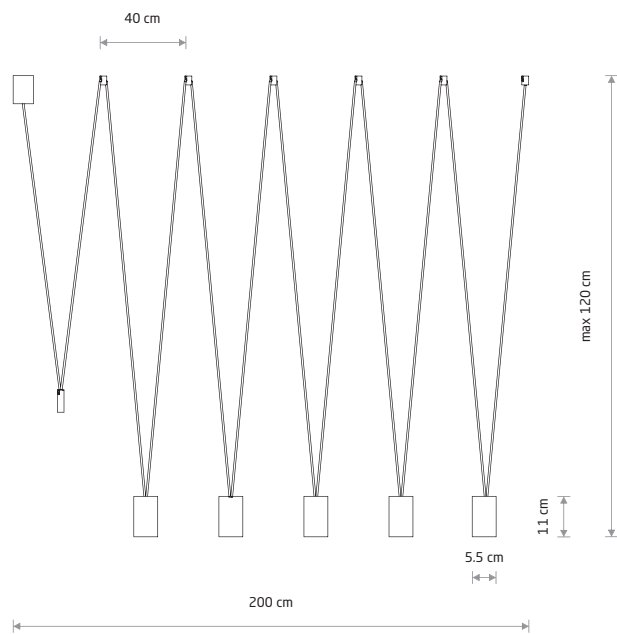

MORE EYE
painted steel

7825


5xGU10 R50, max 10W only LED

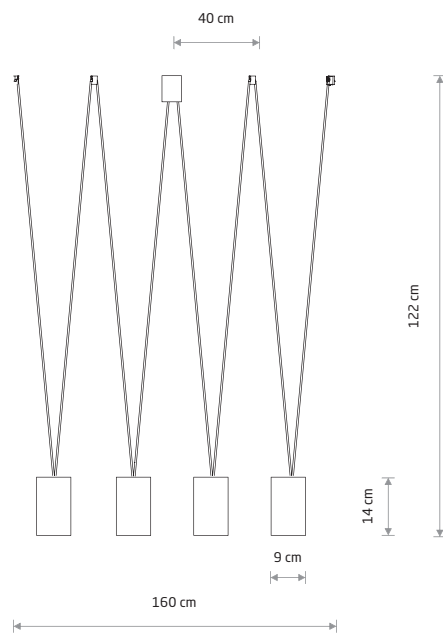

MORE TONE
painted steel, plastic ABS

7814

4xGU10 R50, max 10W only LED


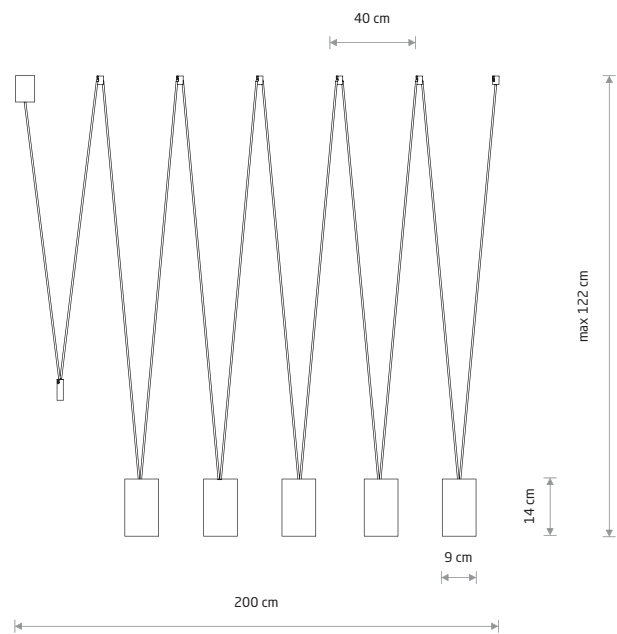


MORE TONE
painted steel, plastic ABS

7817

5xGU10 R50, max 10W only LED

IMBRAIA 9675

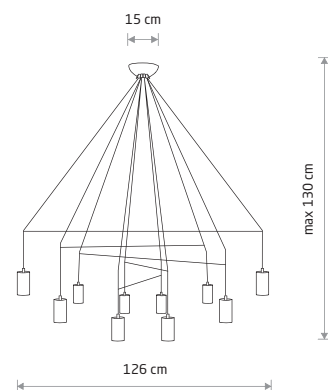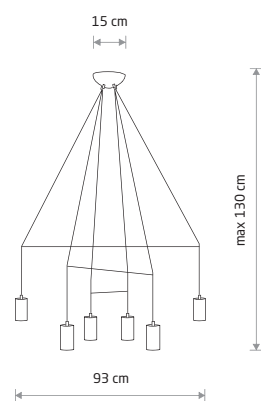


IMBRIA

painting steel, braided cable

■ 9677

● 6xGU10, max 10W only LED

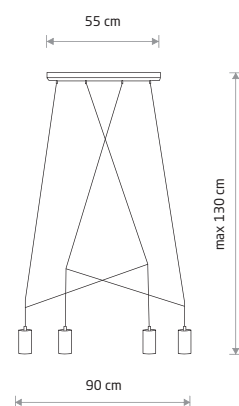

IMBRIA

painting steel, braided cable

■ 9192


● 4xGU10, max 10W only LED

IMBRIA

painting steel, braided cable

■ 9680

● 10xGU10 R50, max 10W only LED

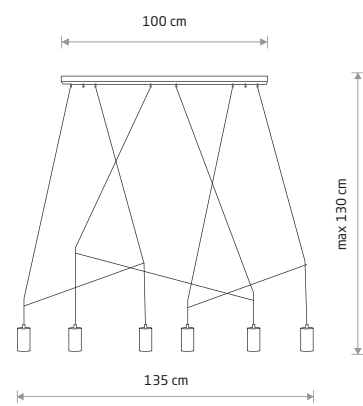



IMBRIA

painting steel, braided cable

■ 9675

● 6xGU10 R50, max 10W only LED

SLING 10355

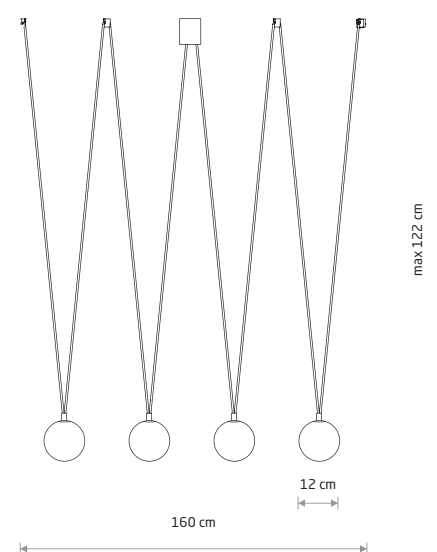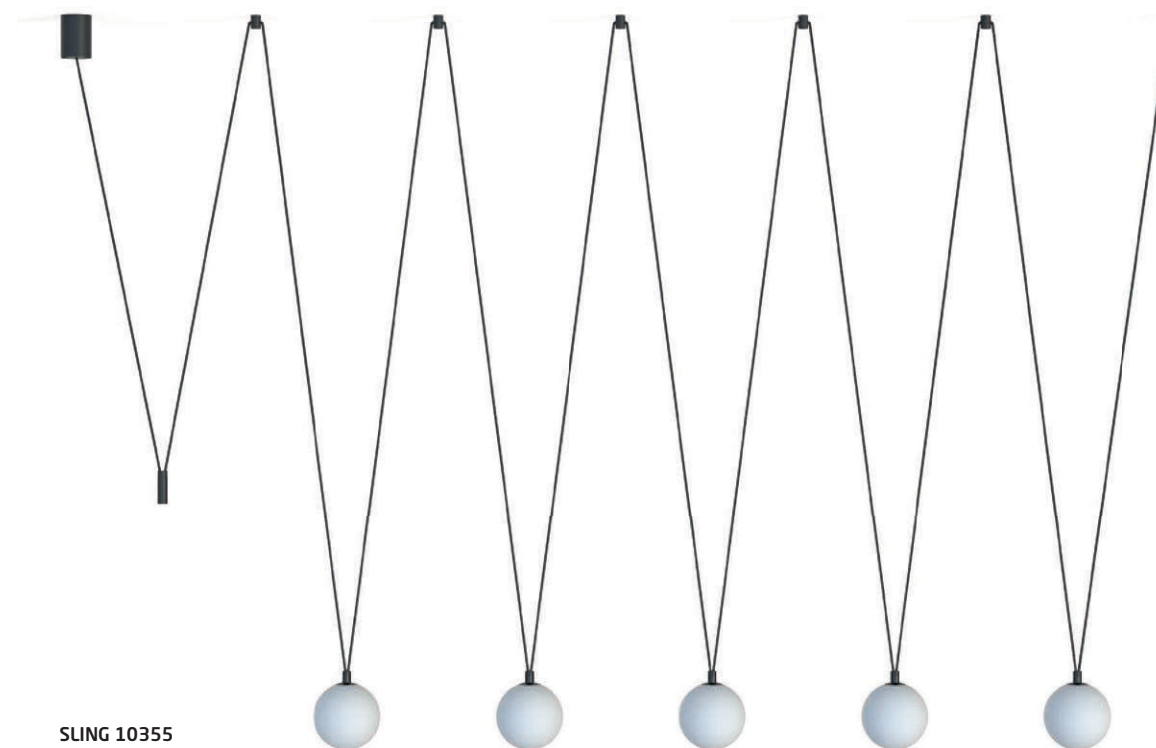


SLING

glass, painting steel

■ 10354

● 4xG9, max 12W only LED

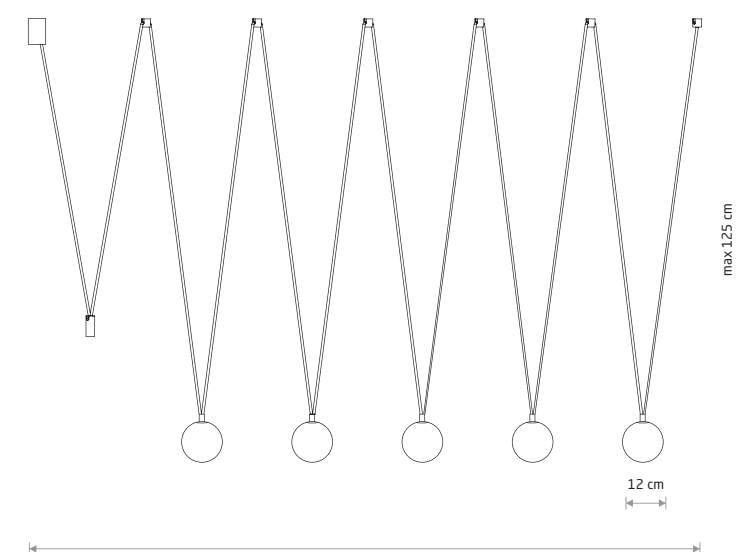

SLING


glass, painting steel

■ 10355

● 5xG9, max 12W only LED



KARO 10304

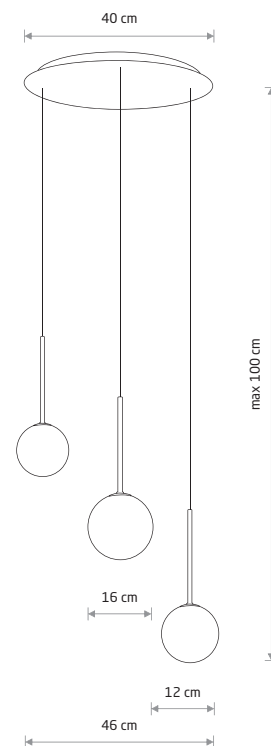

KARO

■ painted steel, glass

■ 10304

● 3xG9, max 12W only LED

■ BULB LED G9, 4W

■ 7503 3000K ■ 7504 4000K



KARO


■ painted steel, glass

■ 10305

● 1xG9, max 12W only LED

■ BULB LED G9, 4W

■ 7503 3000K ■ 7504 4000K

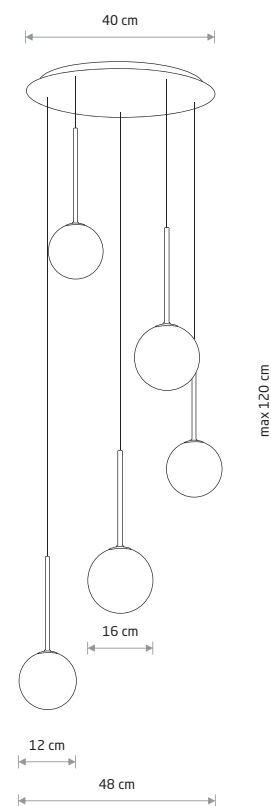

KARO

■ painted steel, glass


■ 10303

● 5xG9, max 12W only LED

■ BULB LED G9, 4W

■ 7503 3000K ■ 7504 4000K

KARO 10934

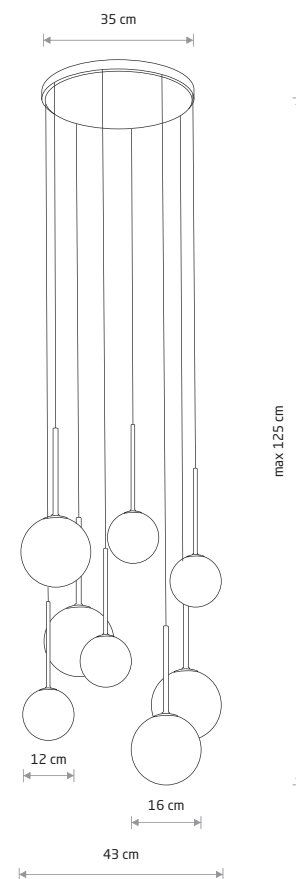

KARO

■ painted steel, glass

■ 10934

● 8xG9, max 12W only LED


■ BULB LED G9, 4W

■ 7503 3000K ■ 7504 4000K



SNOWBALL 11408

SNOWBALL
11408

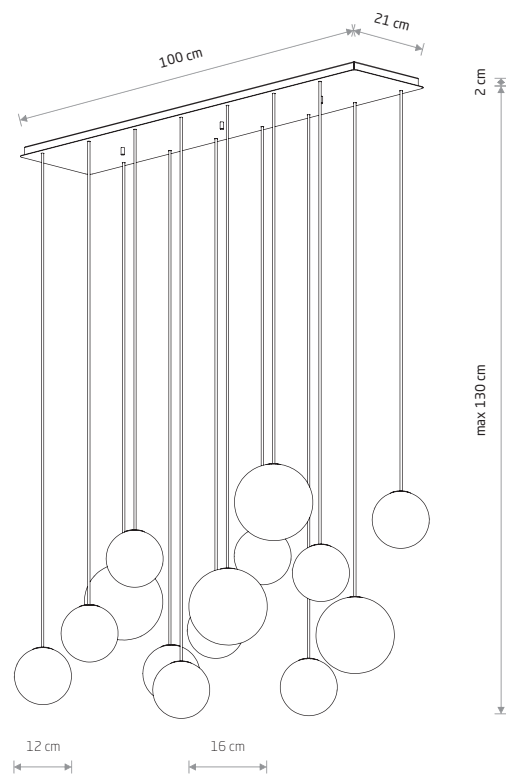

SNOWBALL
painted steel, glass

■ 11408

⌚ 14xG9, max 12W only LED


💡 BULB LED G9, 4W

□ 7503 3000K □ 7504 4000K

KIER M 10307



KIER L 10308




KIER M
painted steel, glass

■ 10307 ■ 10306

⌚ 1xG9, max 12W only LED

💡 BULB LED G9, 4W

□ 7503 3000K □ 7504 4000K




KIER S
painted steel, glass

■ 10302 ■ 10623

⌚ 1xG9, max 12W only LED

💡 BULB LED G9, 4W

□ 7503 3000K □ 7504 4000K

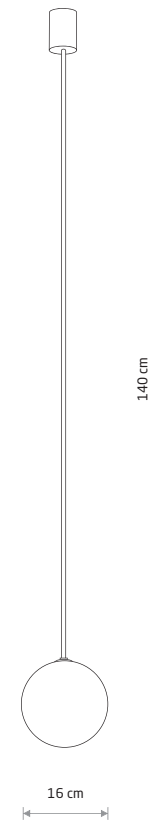

KIER L
painted steel, glass

■ 10310 ■ 10308


⌚ 1xG9, max 12W only LED

💡 BULB LED G9, 4W

□ 7503 3000K □ 7504 4000K



PIK 10301




PIK
painted aluminum, glass

- 10299
- 1xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K




PIK
painted aluminum, glass

- 10300
- 2xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K

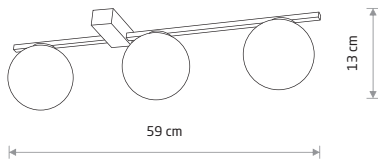


PIK
painted aluminum, glass

- 10301
- 3xG9, max 12W only LED


BULB LED G9, 4W

7503 3000K 7504 4000K

BLACK P013 RAL 9005 WHITE

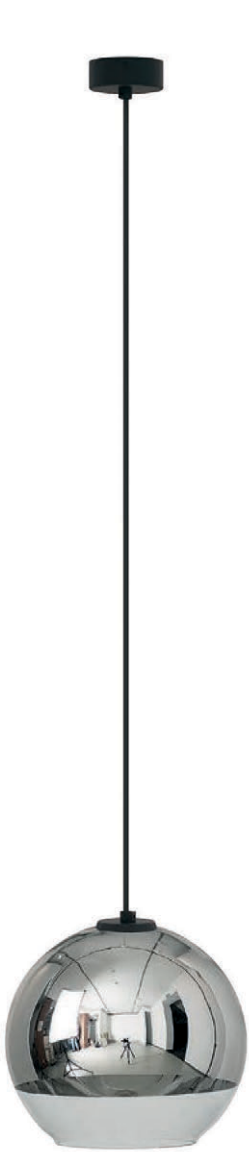

GLOBE PLUS M 7606

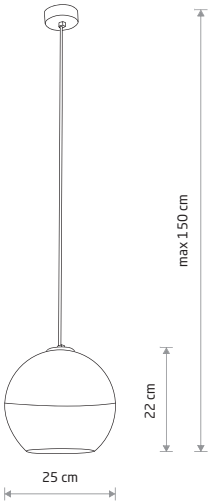


GLOBE PLUS M
metallized glass, painted steel

- 7606
- 1xE27, max 25W only LED



GLOBE PLUS S 7605

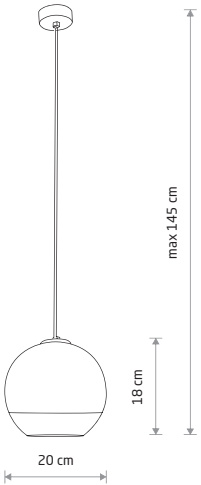


GLOBE PLUS S
metallized glass, painted steel

- 7605
- 1xE27, max 25W only LED



GLOBE PLUS 7607

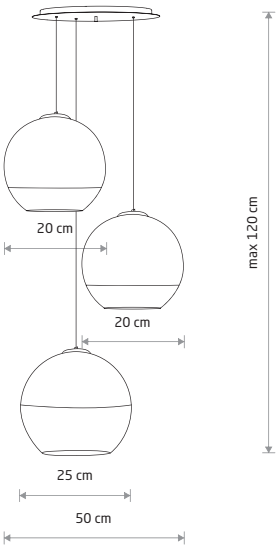

GLOBE PLUS
metallized glass, painted steel


- 7607
- 3xE27, max 25W only LED

CHROME BLACK P013 RAL 9005




SPHERE S
glass, painted steel

7847
1xG9, max 10W LED

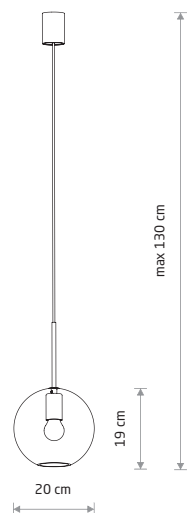


SPHERE M
glass, painted steel

7848
1xE27, max 25W only LED

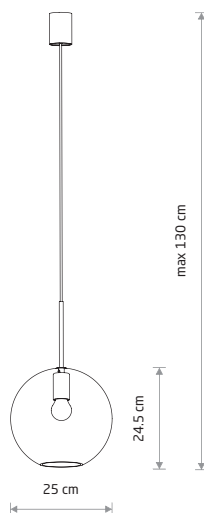


SPHERE L
glass, painted steel

7850
1xE27, max 25W only LED

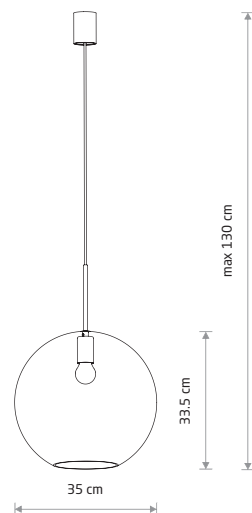

SPHERE XL
glass, painted steel

7846
1xE27, max 25W only LED

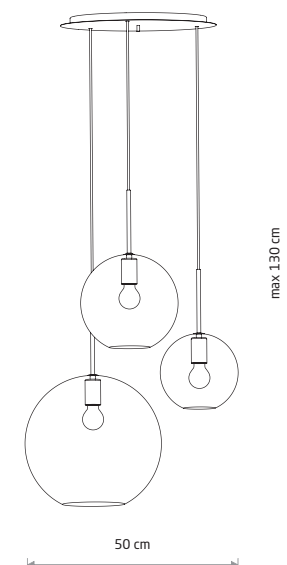

SPHERE
glass, painted steel

7788
3xE27, max 25W only LED



PEAR S 8673

PEAR S

glass, brass-plated steel, painted steel

8673

1xE27, max 25W only LED

glass, painted steel

7800

1xE27, max 25W only LED



PEAR M 8672

PEAR M

glass, brass-plated steel, painted steel

8672

1xE27, max 25W only LED

glass, painted steel

7798

1xE27, max 25W only LED



PEAR L 8671

PEAR L

glass, brass-plated steel, painted steel

8671

1xE27, max 25W only LED


glass, painted steel

7797

1xE27, max 25W only LED



PEAR 7794

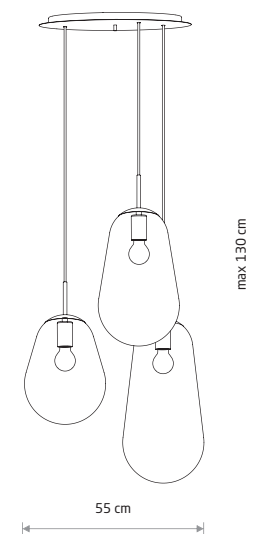

PEAR

glass, brass-plated steel, painted steel

7794





3xE27, max 25W only LED



LUXORA LED
11705



LUXORA LED
11707

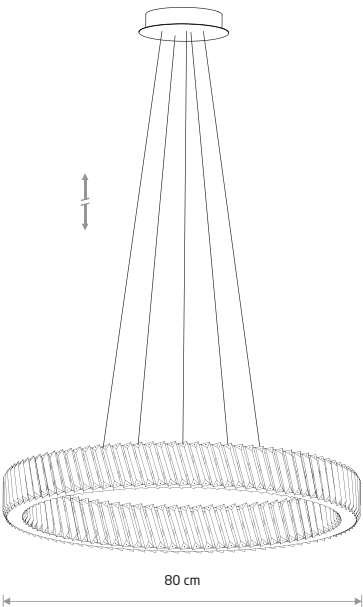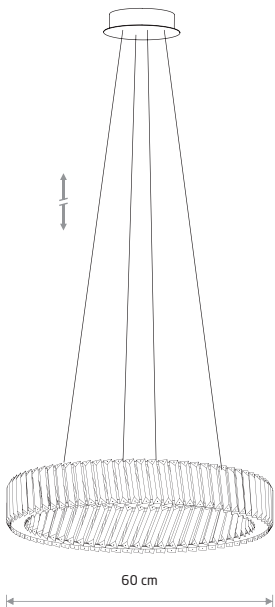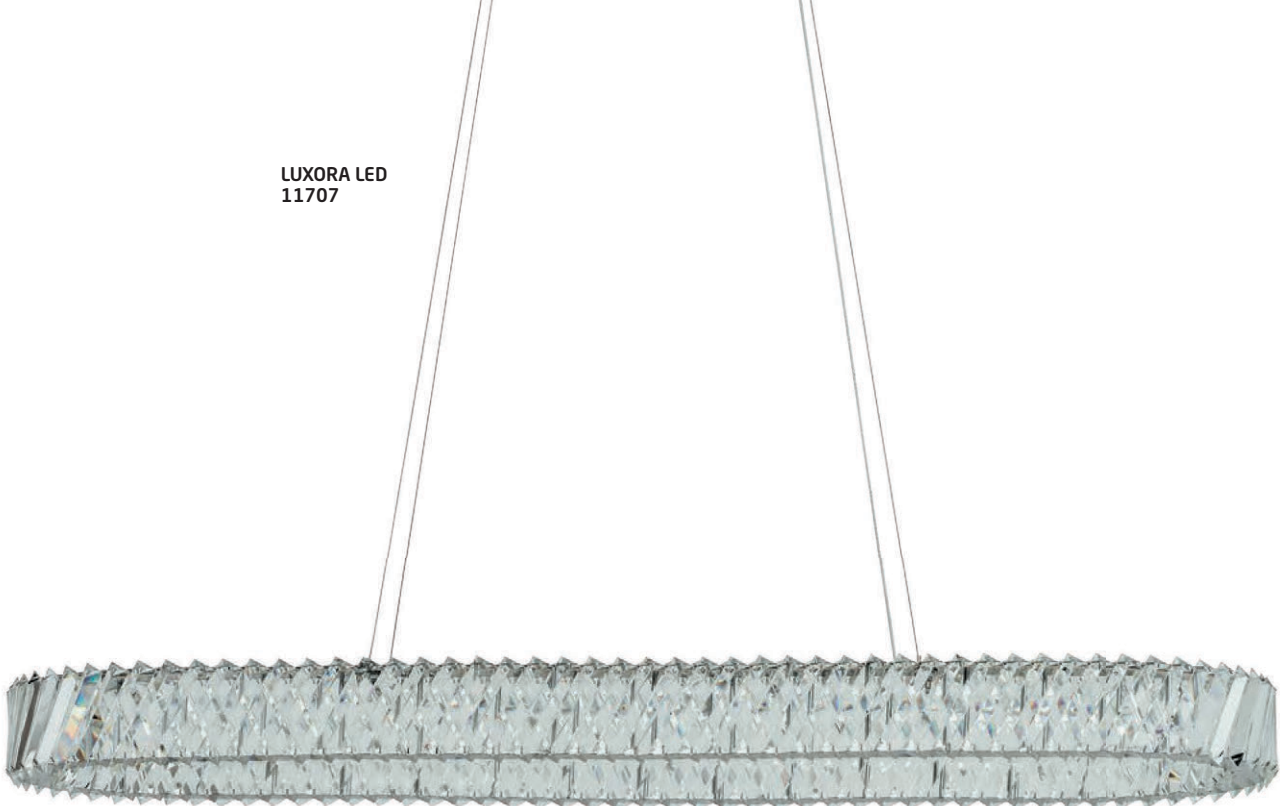

LUXORA LED
crystal, nickel

11705



LUXORA LED
crystal, nickel

11706



LUXORA LED
crystal, nickel

11708



LUXORA LED
crystal, nickel

11707



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11705	30W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11706	38W LED	3000K	3400 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h


TRANSPARENT NICKEL

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11707	40W LED	3000K	3600 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11708	20W LED	3000K	1800 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h


TRANSPARENT NICKEL



CRISTAL M 7627

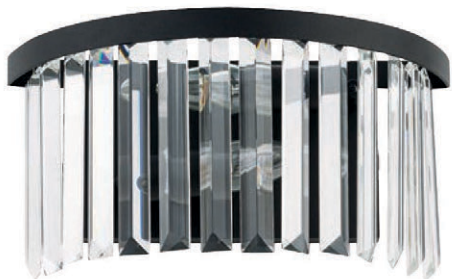


CRISTAL 7633



CRISTAL
crystal, painted steel

7633


2xE14, max 25W only LED

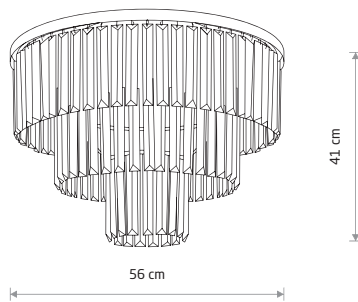

CRISTAL M
crystal, painted steel

7627


9xE14, max 25W only LED

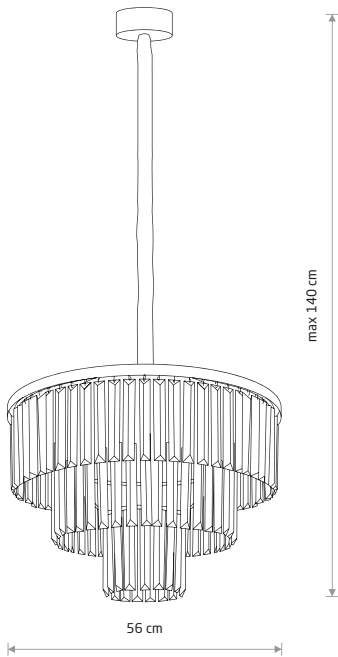

CRISTAL M
crystal, painted steel

7616

9xE14, max 25W only LED

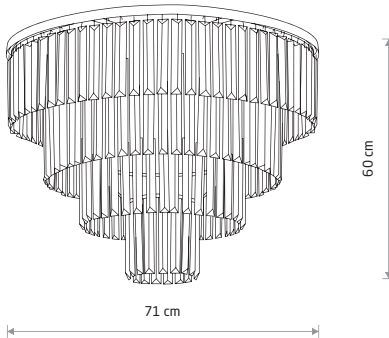

CRISTAL L
crystal, painted steel

7630

12xE14, max 25W only LED



CRISTAL L
crystal, painted steel

7614


12xE14, max 25W only LED



HAMPTON 8154




HAMPTON 8155

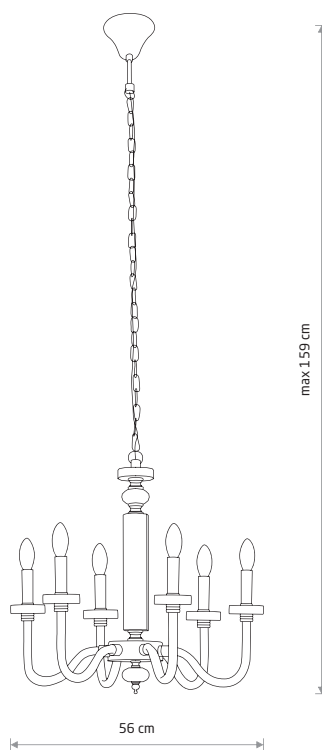

HAMPTON
chrome plated steel, glass

8154

6xE14, max 10W only LED




HAMPTON
chrome plated steel, glass

8155

2xE14, max 10W only LED




NEWPORT 8156



NEWPORT
glass, fabric, chrome plated steel

8157

1xE14, max 10W only LED

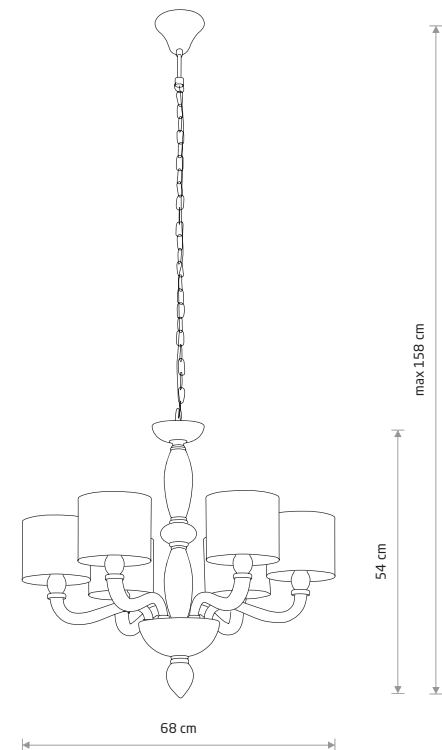

NEWPORT
glass, fabric, chrome plated steel


8156

6xE14, max 10W only LED






CERAMIC LED 11702

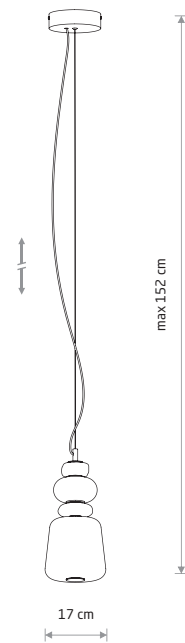


CERAMIC LED
glass, ceramic housing

11702

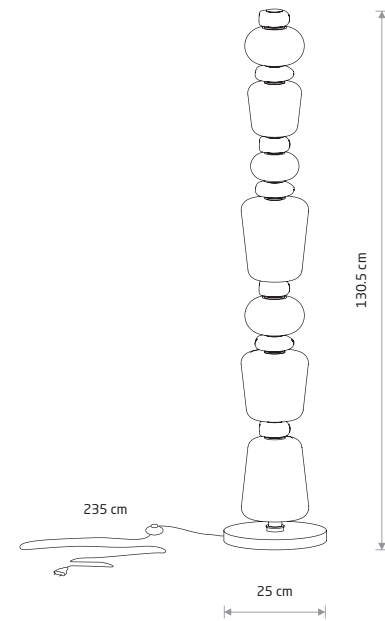

CERAMIC LED
glass, ceramic housing

11704

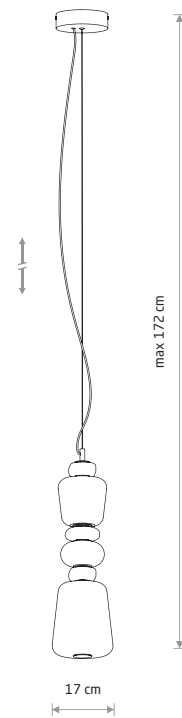


CERAMIC LED
glass, ceramic housing

11701




CERAMIC LED 11700




CERAMIC LED
glass, ceramic housing

11703

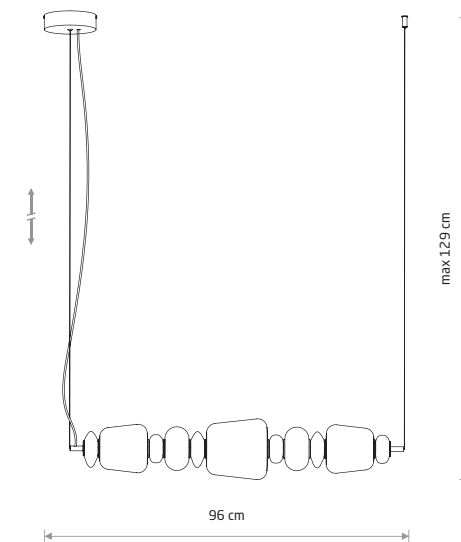

CERAMIC LED
glass, ceramic housing

11699

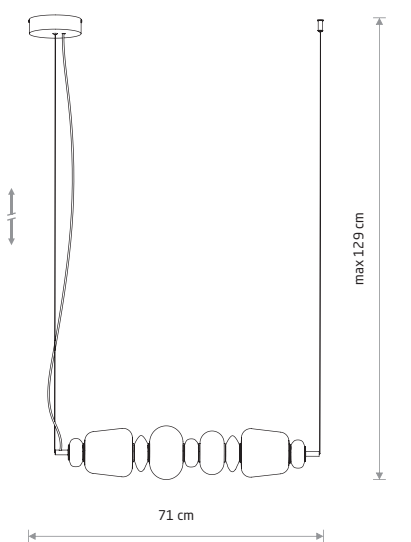


CERAMIC LED
glass, ceramic housing

11700



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11699	26W LED	3000K	2000 lm	360 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11700	22W LED	3000K	1750 lm	360 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11701	19W LED	3000K	1500 lm	360 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11702	12W LED	3000K	950 lm	360 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11703	8W LED	3000K	650 lm	360 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h
11704	34W LED	3000K	2700 lm	360 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	25000h

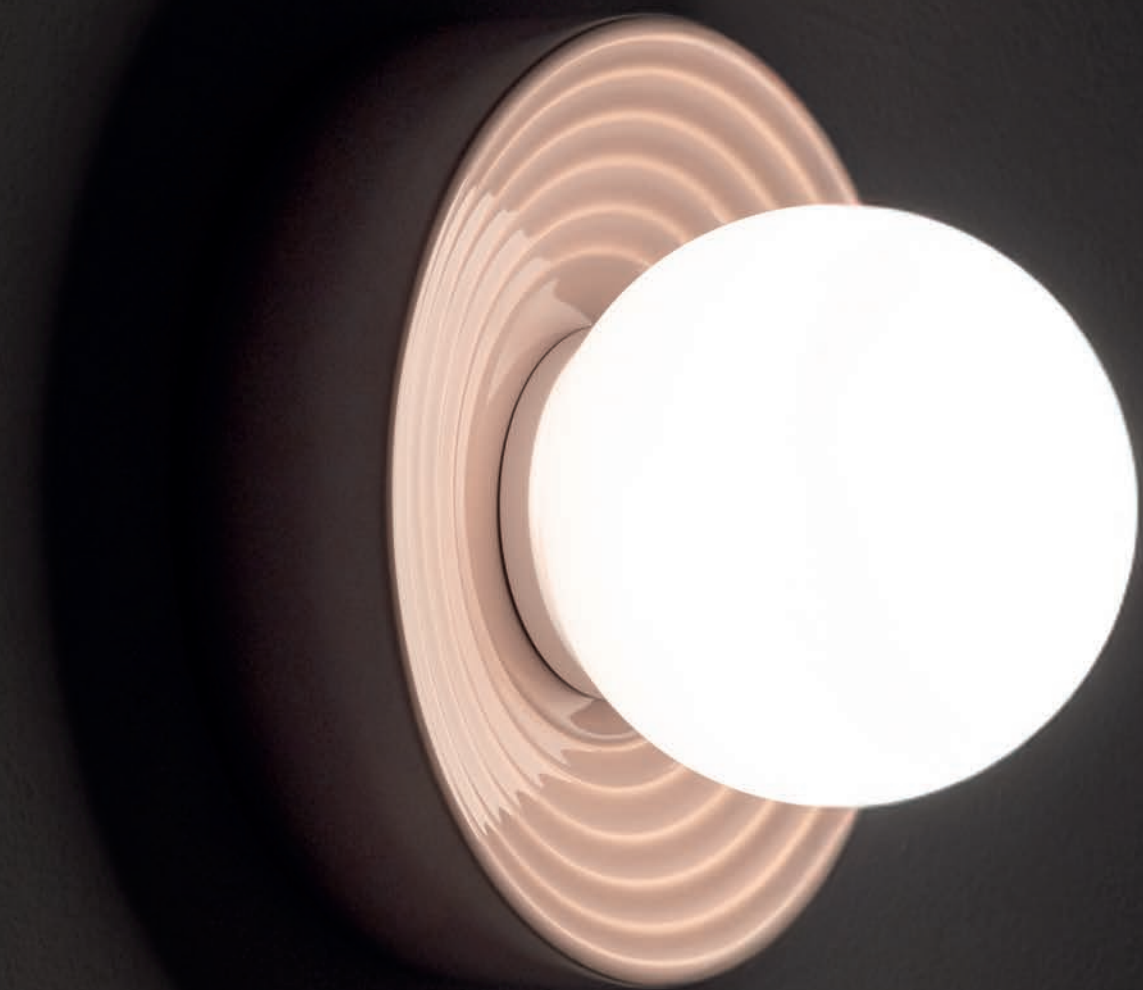


CLAY M 11746



CLAY S 11750



CLAY S 11746




CLAY S

ceramic housing, glass

11748 11750

1xG9, max 12W only LED



CLAY M

ceramic housing, glass

11746 11747

1xG9, max 12W only LED



POLARIS 9060

POLARIS

metallized glass, painted steel

9060

1xE27, max 25W only LED




POLARIS 9057



POLARIS 9058



POLARIS 9056

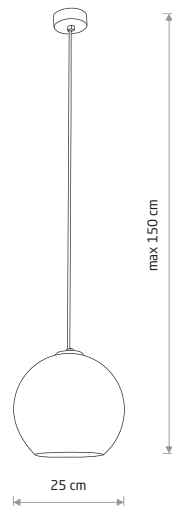


POLARIS

metallized glass, painted steel

9056 9057 9058

1xE27, max 25W only LED



18-22 cm

AMALFI

metallized glass, steel, solid brass

9154 9155


1xE27, max 25W only LED



AMALFI 9154



AMALFI L 8381

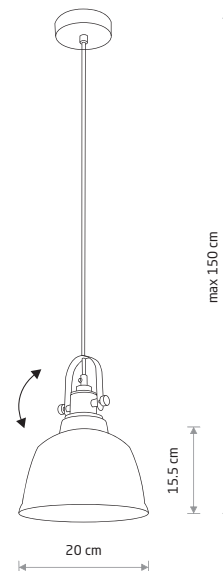


max 150 cm

AMALFI M

metallized glass, steel, solid brass

9153 9152

1xE27, max 25W only LED

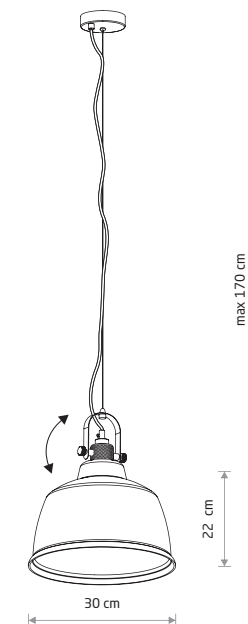


max 170 cm

AMALFI L


metallized glass, steel, solid brass

8381

1xE27, max 25W only LED

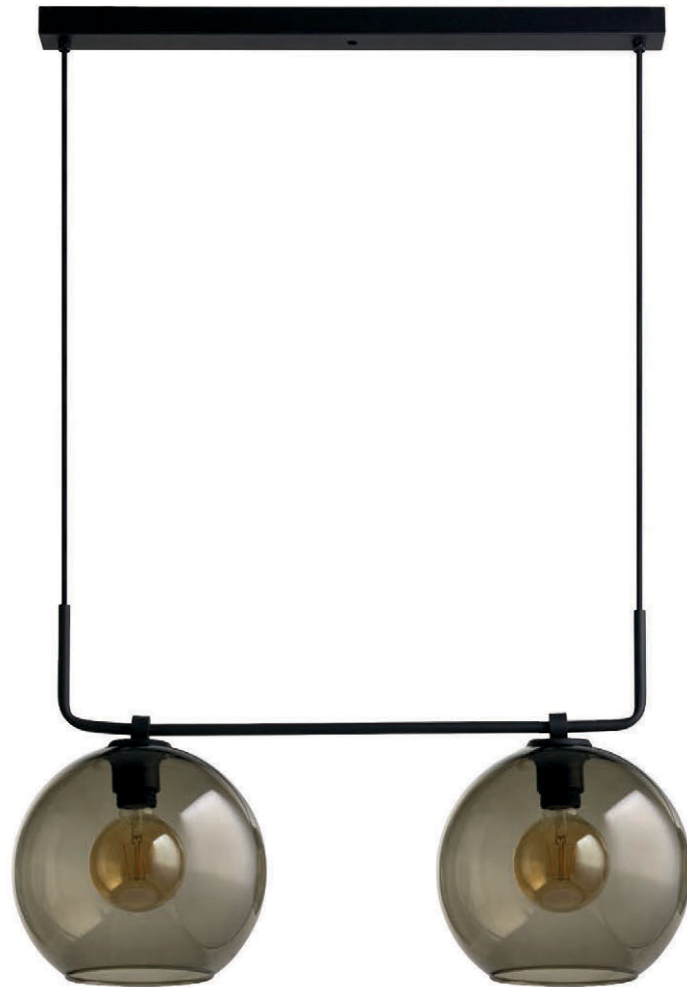


MONACO 9363

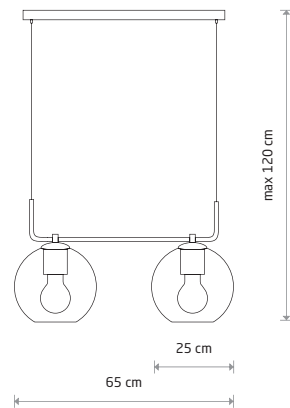


MONACO
glass, braided cable, painted steel

■ 9363

⌚ 2xE27, max 25W only LED

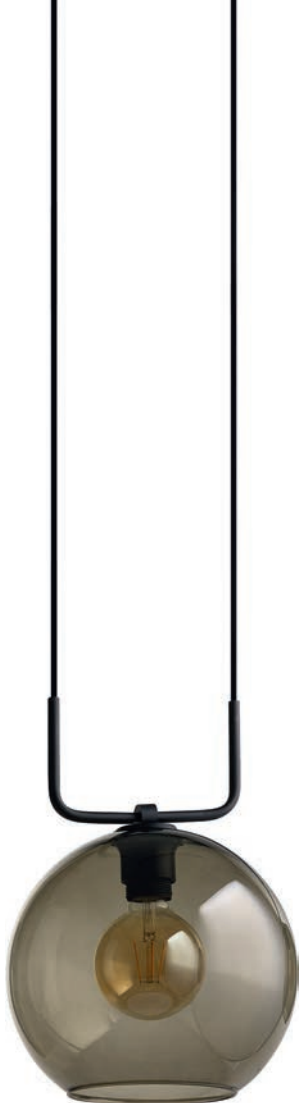


MONACO 9364

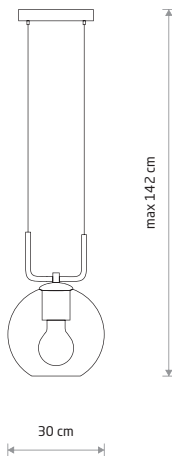

MONACO
glass, braided cable, painted steel

■ 9364

⌚ 1xE27, max 25W only LED

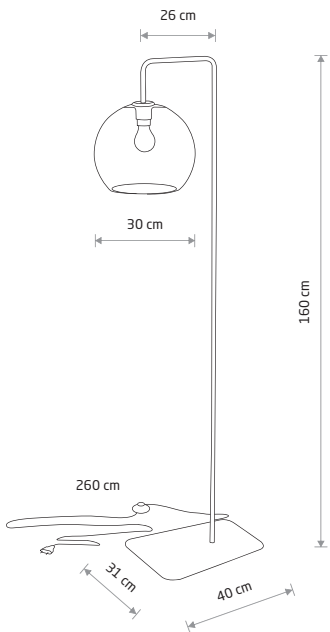

MONACO
painted steel, glass

■ 8794

⌚ 1xE27, max 25W only LED




VETRO 7641



VETRO 7642




VETRO 9131

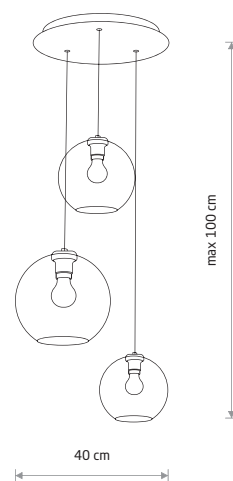


VETRO
glass, painted steel
■ 7641

● ● 3xE27, max 25W only LED

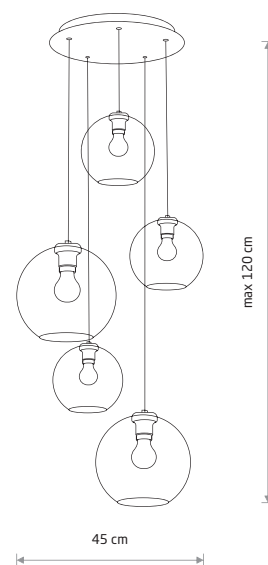


VETRO
glass, painted steel
■ 7642

● ● 5xE27, max 25W only LED



VETRO
glass, painted steel
■ 9132

● ● 1xE27, max 25W only LED

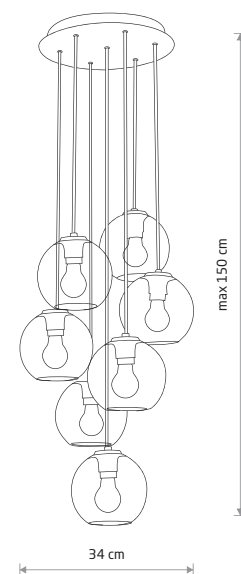


VETRO
glass, painted steel
■ 9131

● ● 7xE27, max 25W only LED





SANTANA S 11650



SANTANA S


fabric, painted steel, plastic

11650

1xE27, max 15W only LED



SANTANA M 11651




SANTANA M

fabric, painted steel, plastic

11651

1xE27, max 25W only LED

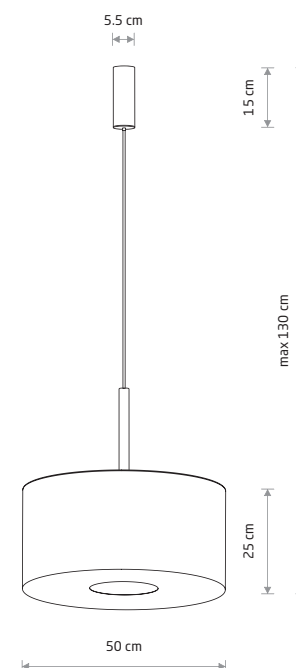


SANTANA M

fabric, painted steel, plastic

11652

1xE27, max 25W only LED

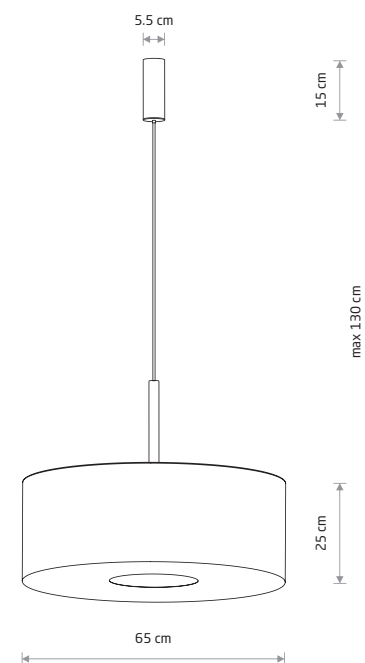

SANTANA L

fabric, painted steel, plastic

11653


1xE27, max 25W only LED



SANTANA M 11652



SANTANA A 11654

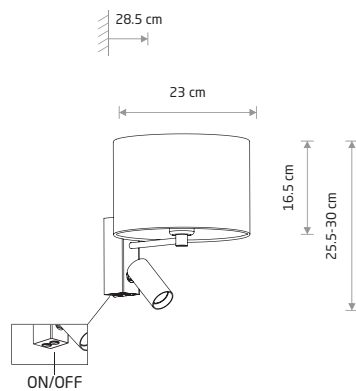


SANTANA A
fabric, painted steel

11654

1xE27, 1x GU10 R35 max 10W only LED




SANTANA B 11655



SANTANA B
fabric, painted steel

11655


2xG9, max 10W only LED

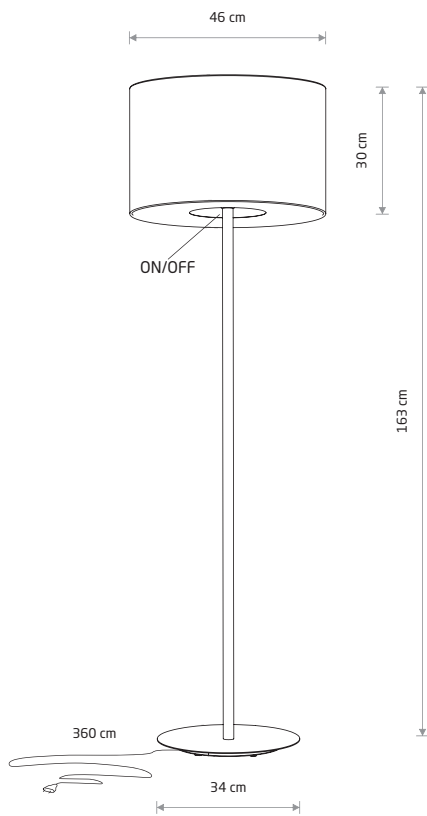

SANTANA
fabric, painted steel, plastic

11656

1xE27, max 25W only LED

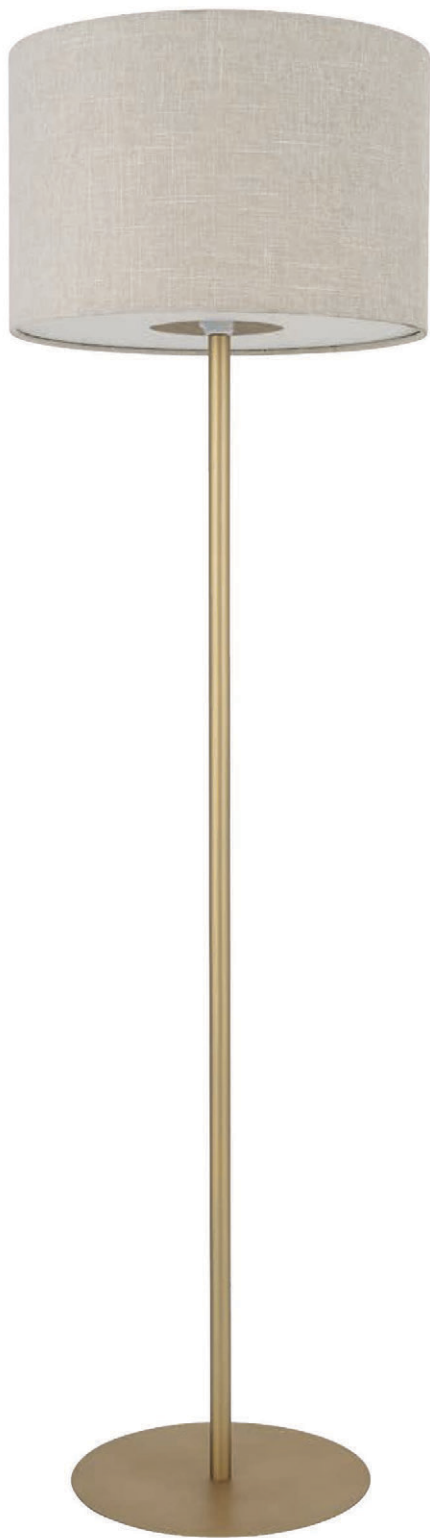


SANTANA 11656



AMARELA S 11657




AMARELA M 11658



AMARELA S
fabric, painted steel, plastic

■ 11657

⏻ 1xE27, max 15W only LED




AMARELA M
fabric, painted steel, plastic

■ 11658

⏻ 1xE27, max 25W only LED




AMARELA L 11660

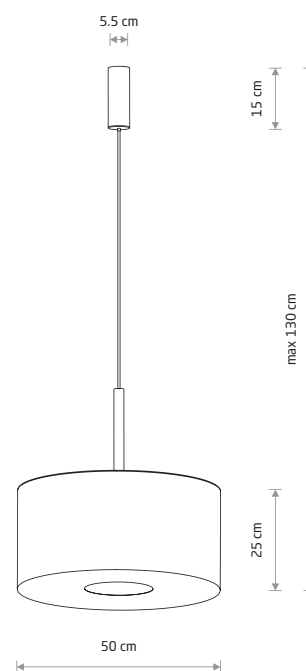

AMARELA M
fabric, painted steel, plastic

■ 11659

⏻ 1xE27, max 25W only LED

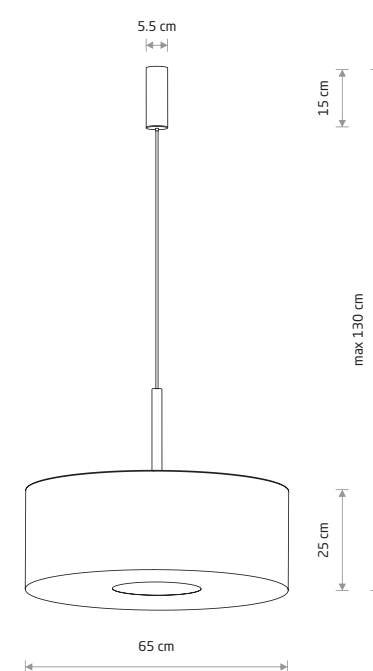


AMARELA L
fabric, painted steel, plastic

■ 11660

⏻ 1xE27, max 25W only LED



AMARELA A 11661

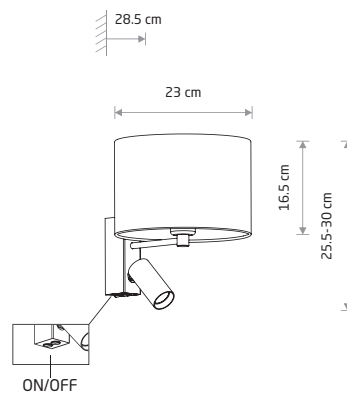

AMARELA A


fabric, painted steel

■ 11661

■ 1xE27, 1x GU10 R35 max 10W only LED



AMARELA B 11662




AMARELA B

fabric, painted steel

■ 11662

■ 2xG9, max 10W only LED

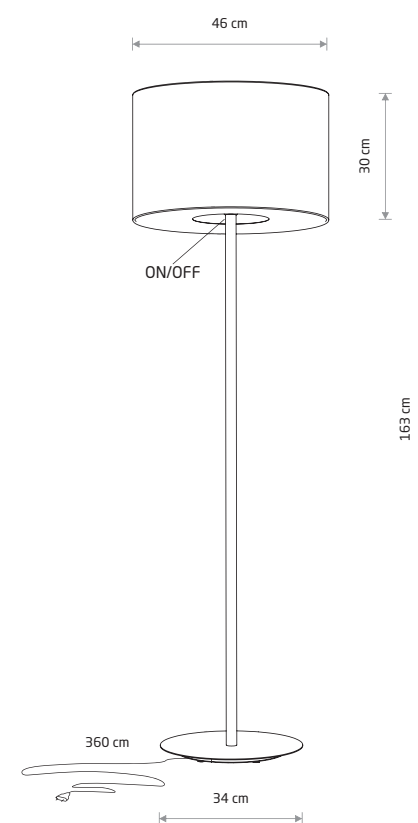


AMARELA

fabric, painted steel, plastic

■ 11663

■ 1xE27, max 25W only LED

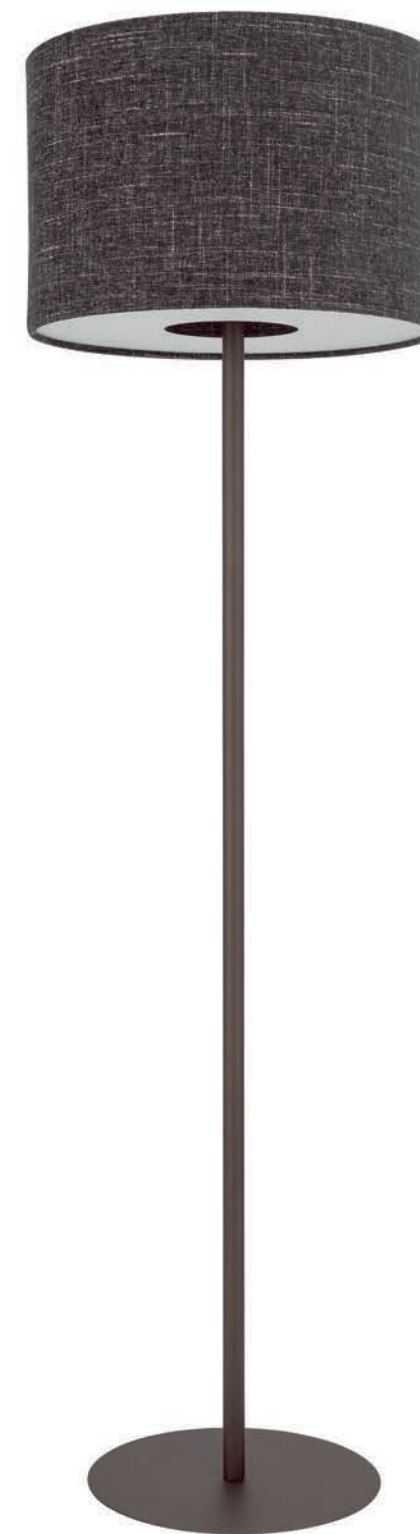

AMARELA 11663



CEDRO M 11665

AMY LED 11533

CEDRO B 11669



Ballerina included


CEDRO M 11665



CEDRO S 11670




CEDRO M 11671

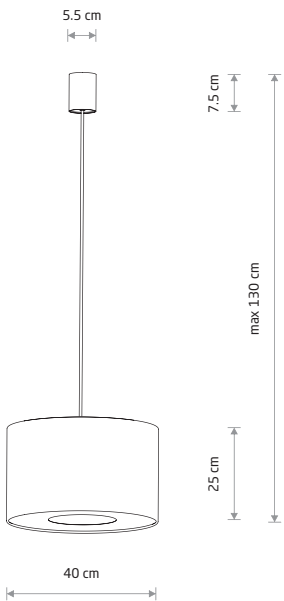

CEDRO S
fabric, painted steel, plastic

11664


1xE27, max 15W only LED

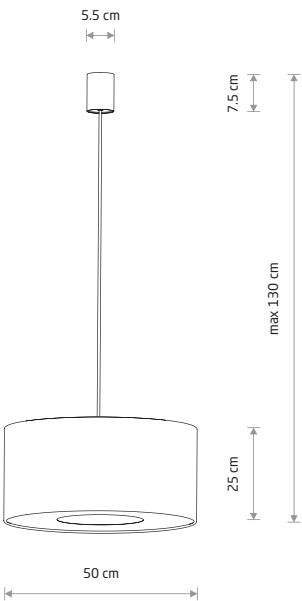

CEDRO M
fabric, painted steel, plastic

11665


1xE27, max 25W only LED

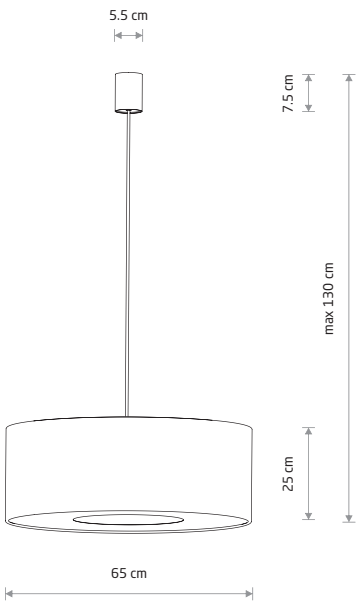

CEDRO L
fabric, painted steel, plastic

11666


1xE27, max 25W only LED



CEDRO S
fabric, plastic

11670


2xE27, max 15W only LED



CEDRO M
fabric, plastic

11671

4xE27, max 15W only LED

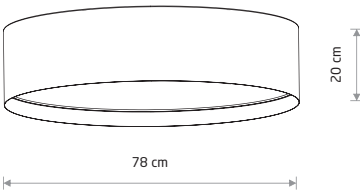


CEDRO L
fabric, plastic

11672

7xE27, max 15W only LED



CEDRO A 11668

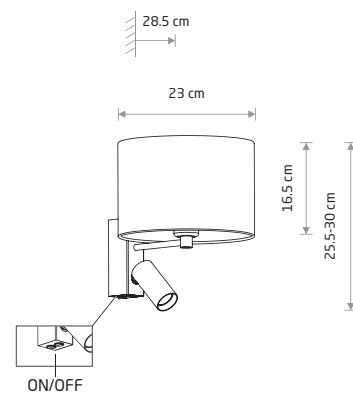

CEDRO A


fabric, painted steel

11668

1xE27, 1x GU10 R35 max 10W only LED



CEDRO B 11669




CEDRO B

fabric, painted steel

11669

2xG9, max 10W only LED

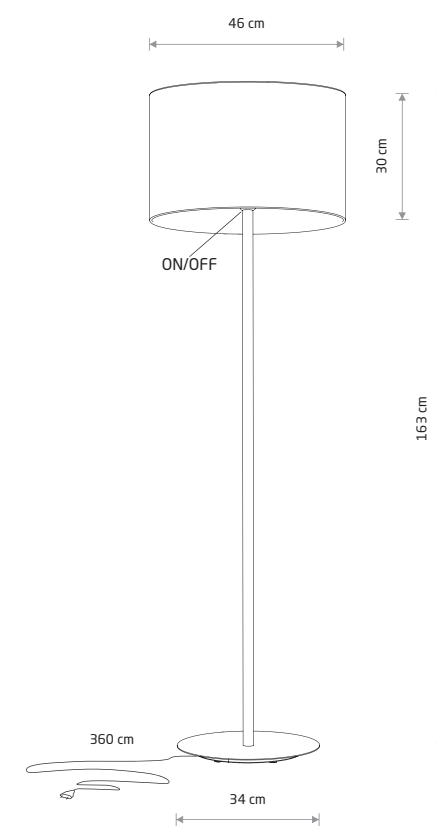


CEDRO

fabric, painted steel

11667

1xE27, max 25W only LED

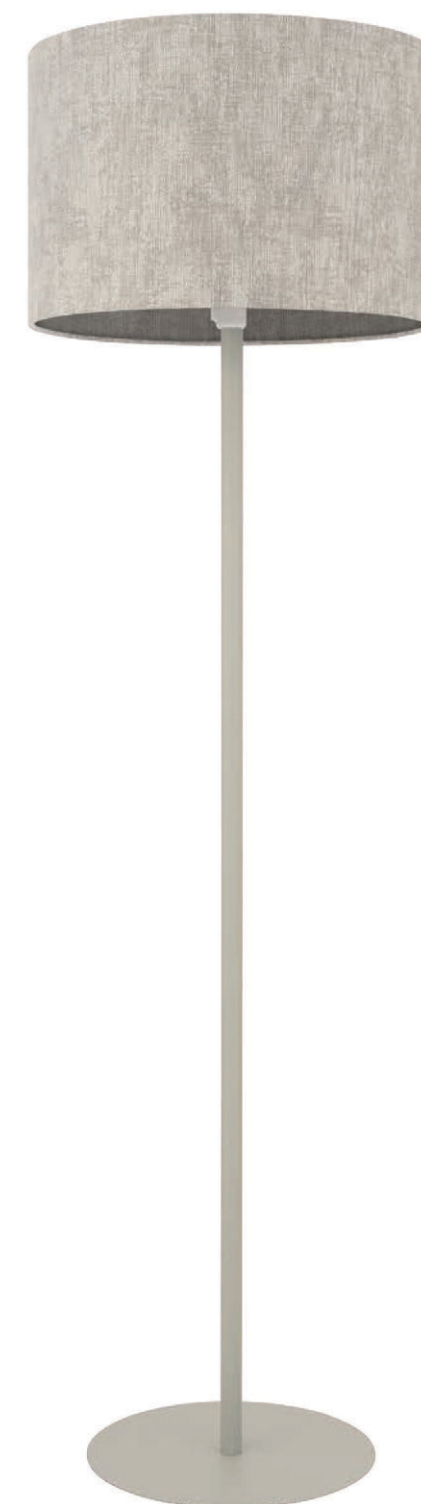

CEDRO 11667



LAGO 11676

LAGO L 11681

CEDRO S 11670



Acrobat included



LAGO S 11673




LAGO M 11674



LAGO M 11680



LAGO L 11681

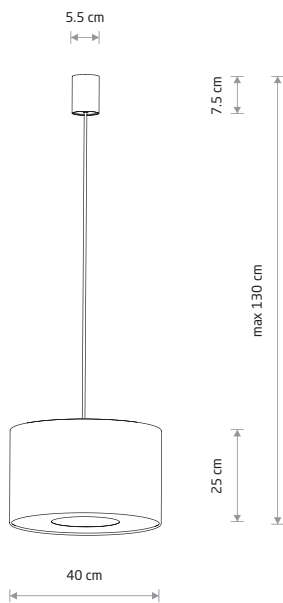


LAGO S

fabric, painted steel, plastic

■ 11673

⌚ 1xE27, max 15W only LED

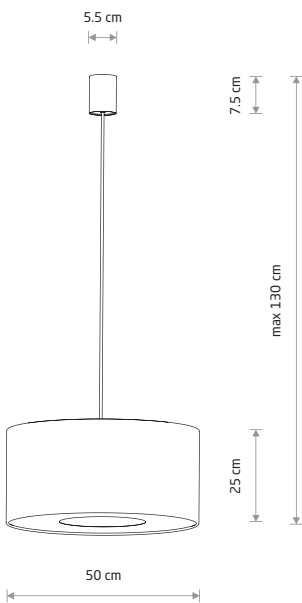


LAGO M

fabric, painted steel, plastic

■ 11674

⌚ 1xE27, max 25W only LED

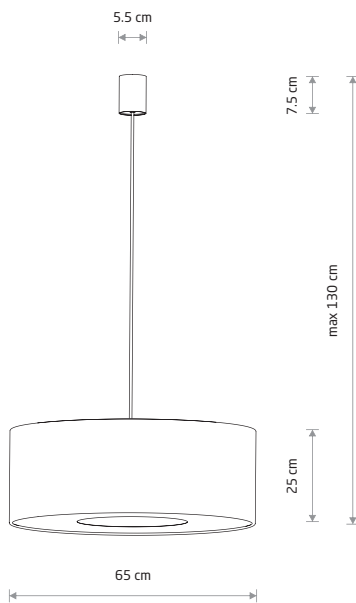


LAGO L

fabric, painted steel, plastic

■ 11675

⌚ 1xE27, max 25W only LED




LAGO S

fabric, plastic

■ 11679

⌚ 2xE27, max 15W only LED




LAGO M

fabric, plastic

■ 11680

⌚ 4xE27, max 15W only LED

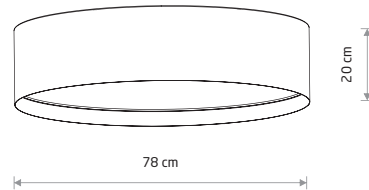

LAGO L


fabric, plastic

■ 11681

⌚ 7xE27, max 15W only LED




LAGO A 11677

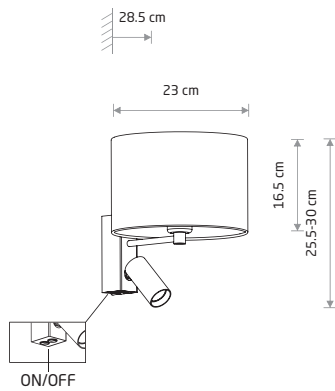


LAGO A
fabric, painted steel
■ 11677
🔌 1xE27, 1x GU10 R35 max 10W only LED



LAGO B 11678



LAGO B
fabric, painted steel
■ 11678
🔌 2xG9, max 10W only LED

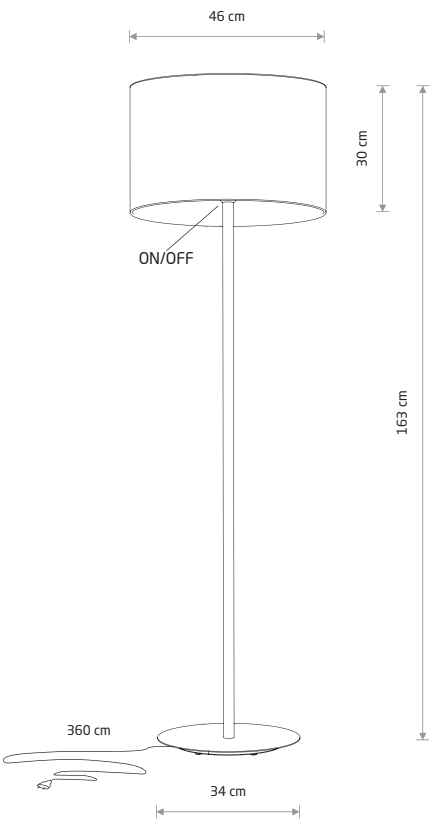


LAGO
fabric, painted steel
■ 11676
🔌 1xE27, max 25W only LED



LAGO 11676



TUTOIA 11684

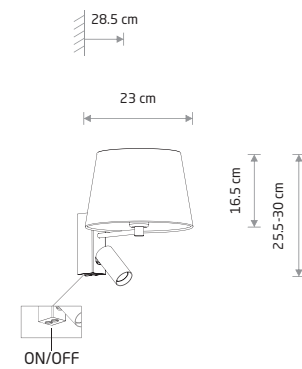

TUTOIA
fabric, painted steel

11684

1xE27, 1x GU10 R35 max 10W only LED


TUTOIA 11683




TUTOIA
fabric, painted steel

11683

1xE27, max 25W only LED

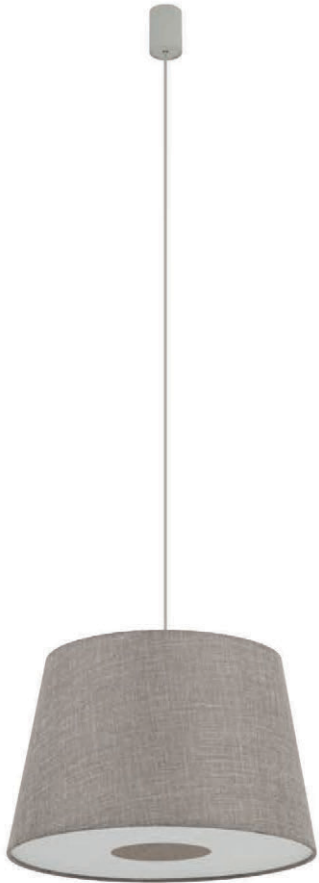

TUTOIA 11682

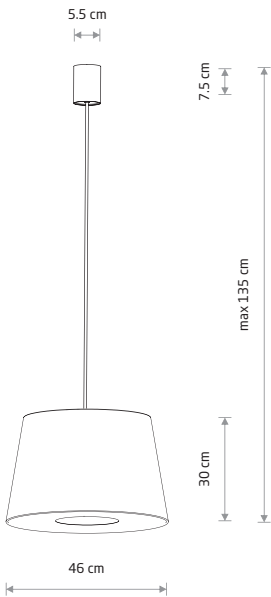


TUTOIA
fabric, painted steel, plastic

11682

1xE27, max 25W only LED



BEIGE T036 SILK GRAY P026 RAL 7044

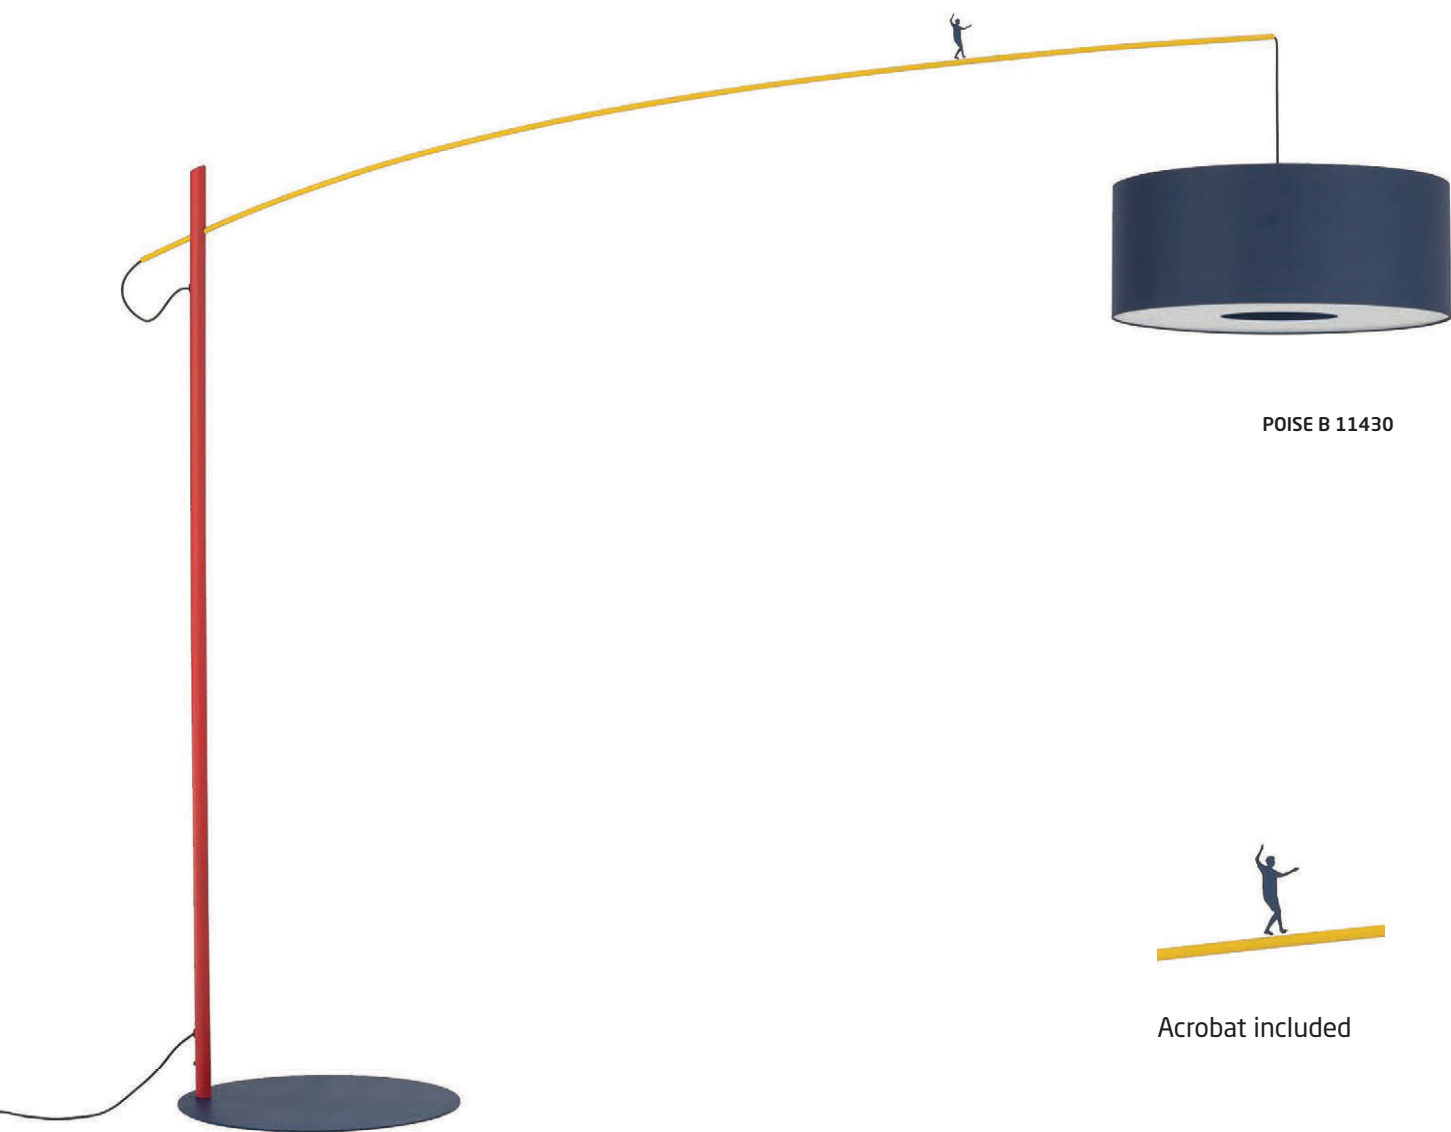

POISE B 11430



Acrobat included

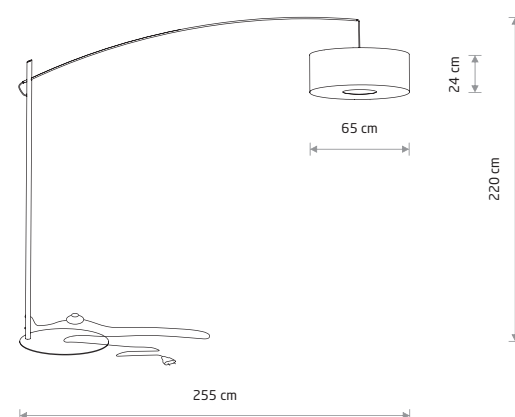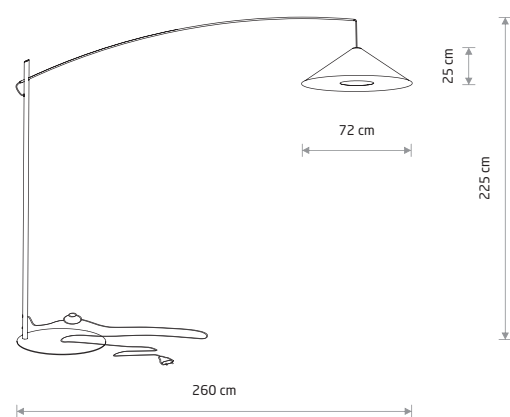

POISE A

fabric, painted steel, plastic

11686 11767 11768

1x E27, max 25W only LED

POISE B

fabric, painted steel, plastic

11430 11685

1x E27, max 25W only LED

NAVY BLUE T039 RED P033 RAL 3020 YELLOW P032 RAL 1021 BEIGE T034 GRAY T035 BLACK T011
BLACK P013 RAL 9005 SILK GRAY P026 RAL 7044 UMBRA GRAY P027 RAL 7022



POISE A 11767



TURDA 8802


TURDA 8802



TURDA 8952




TURDA 8958

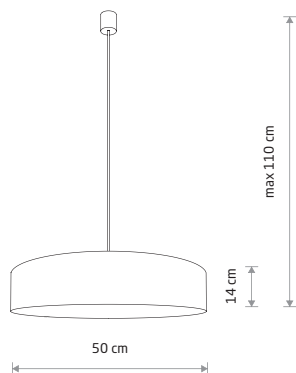


TURDA
fabric, plastic, painted steel

8945
3xE27, max 15W only LED



TURDA
fabric, plastic, painted steel

8952
3xE27, max 15W only LED



TURDA
fabric, plastic, painted steel


8958
7xE27, max 15W only LED



TURDA 8955




TURDA 8802

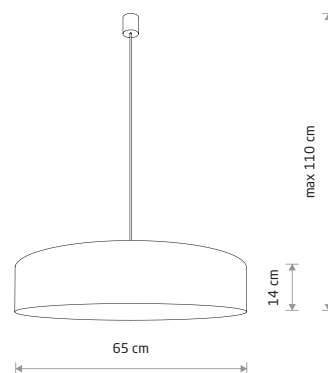


TURDA
fabric, plastic, painted steel

8950
3xE27, max 15W only LED



TURDA
fabric, plastic, painted steel

8955
4xE27, max 15W only LED



TURDA
fabric, plastic, painted steel

8802
7xE27, max 15W only LED



TURDA 8946


TURDA 8947



LAGUNA 8962




LAGUNA 8954

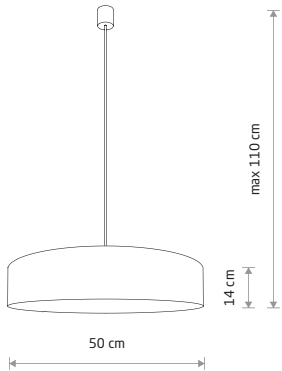

TURDA
fabric, plastic, painted steel

8946


3xE27, max 15W only LED

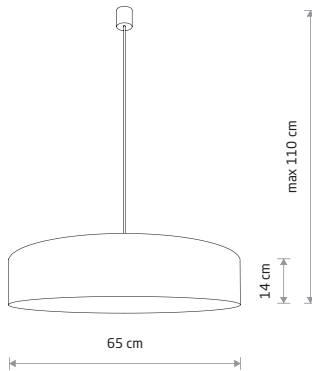

TURDA
fabric, plastic, painted steel

8947


3xE27, max 15W only LED

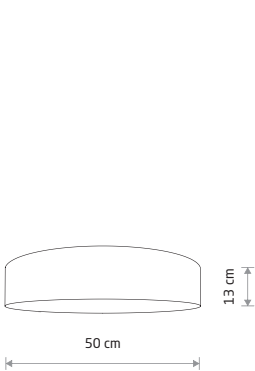

TURDA
fabric, plastic, painted steel

8953


3xE27, max 15W only LED

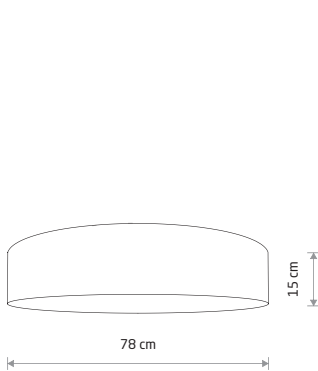

TURDA
fabric, plastic, painted steel

8960


7xE27, max 15W only LED



LAGUNA
velvet, plastic, painted steel

8954


3xE27, max 15W only LED



LAGUNA
velvet, plastic, painted steel

8957

4xE27, max 15W only LED

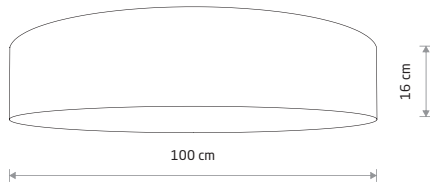


LAGUNA
velvet, plastic, painted steel


8962

9xE27, max 15W only LED


CADILAC 7988

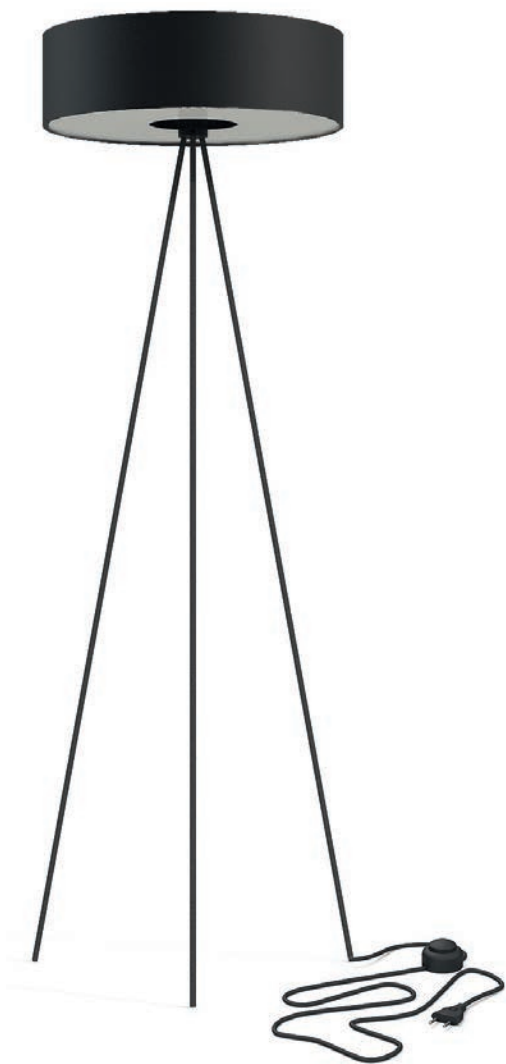



CADILAC 8190

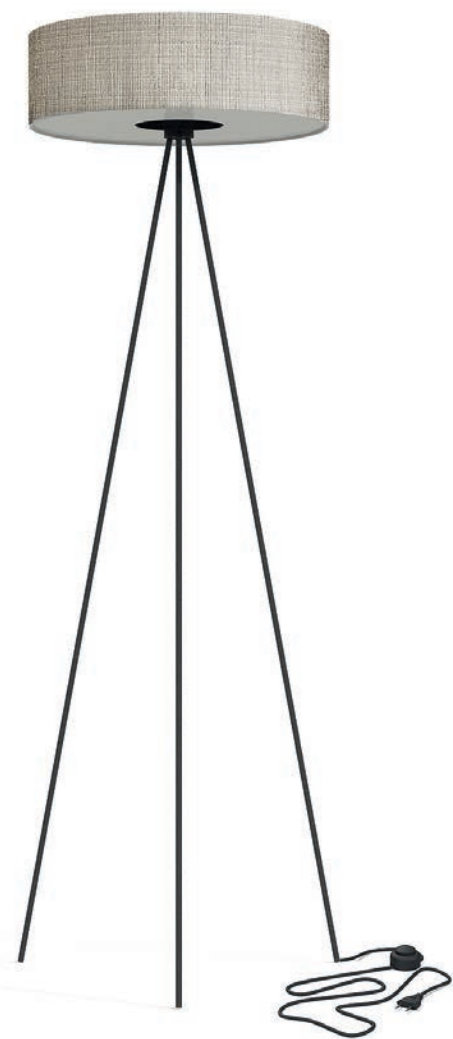

CADILAC 7991

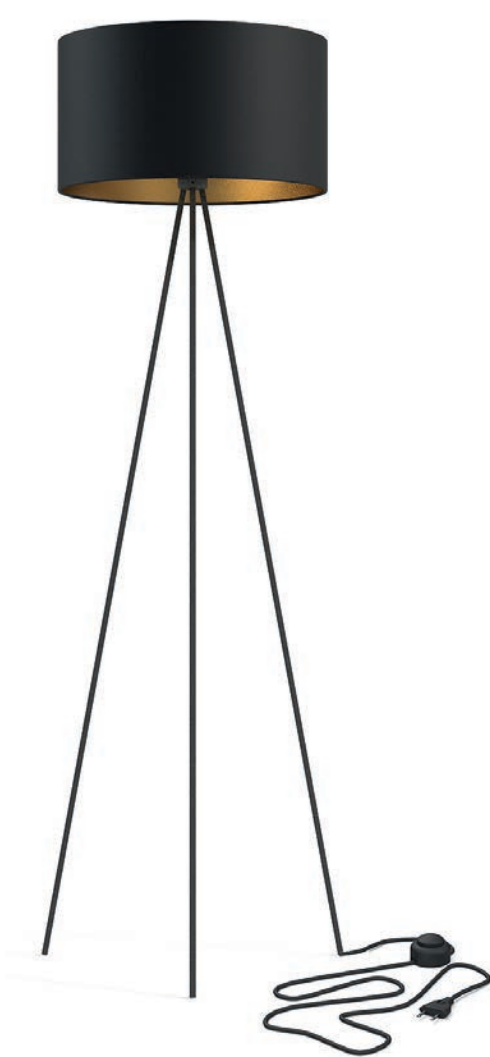

CADILAC 8191

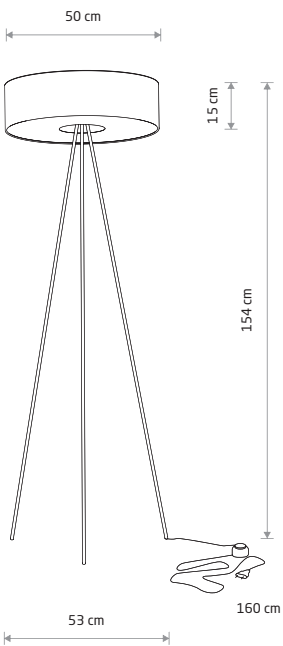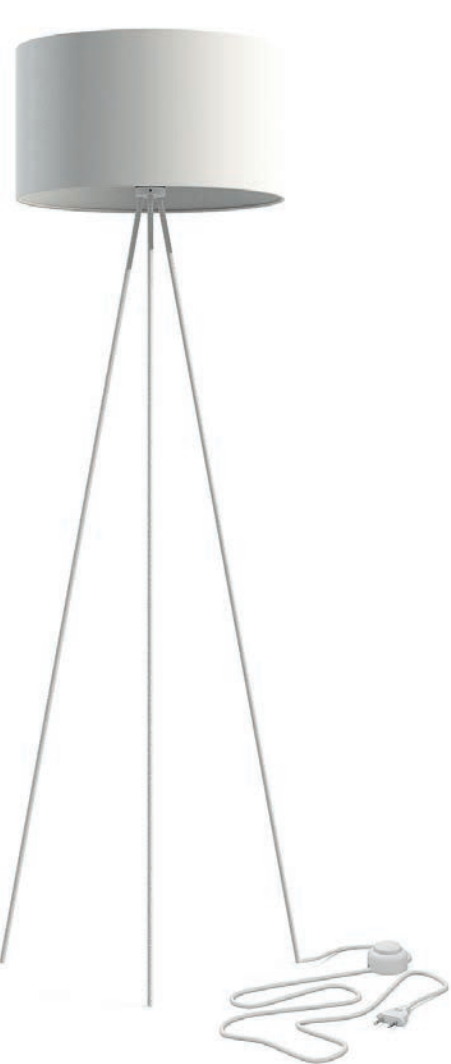


CADILAC

fabric, painted steel, plastic

7988 8190

3xE27, max 25W only LED

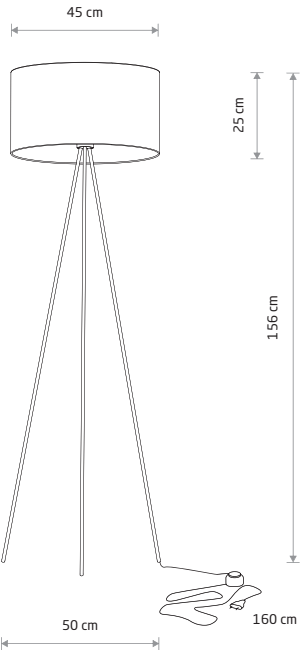

CADILAC

fabric, painted steel

7991 8191


1xE27, max 25W only LED



MIST 8944

MIST 8943


MIST 8942



MIST
fabric, plastic, painted steel

8943


3xE27, max 15W only LED



MIST
fabric, plastic, painted steel

8944


7xE27, max 15W only LED

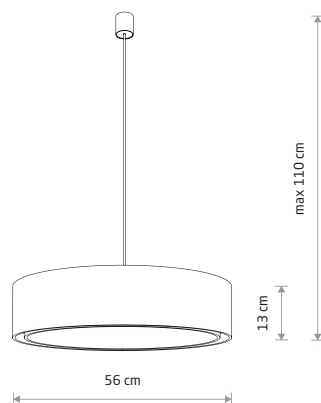

MIST
fabric, plastic, painted steel


8942

3xE27, max 15W only LED

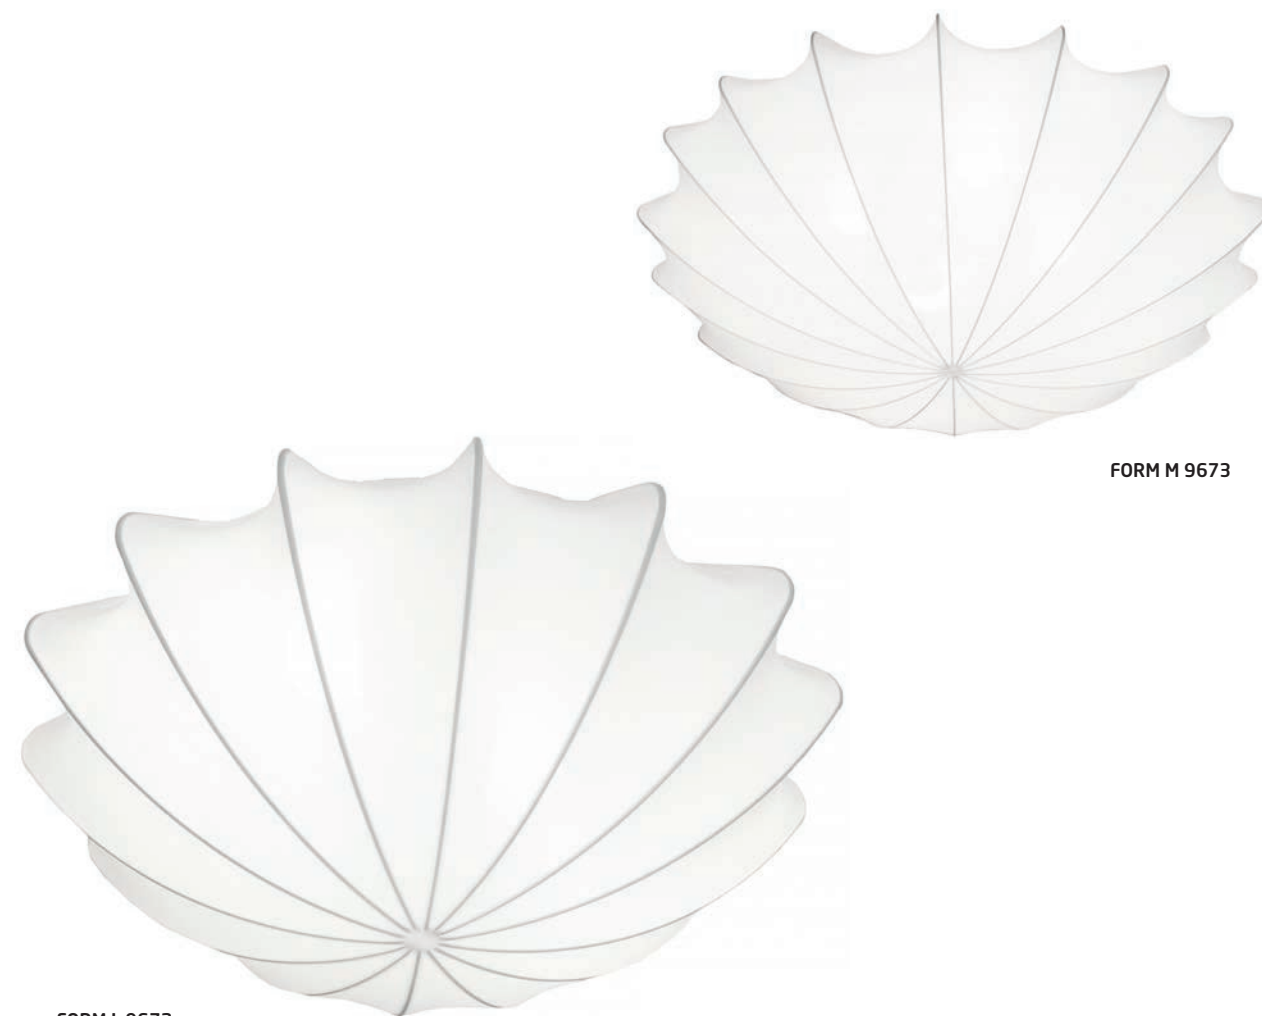

FORM L 9672


FORM M 9673

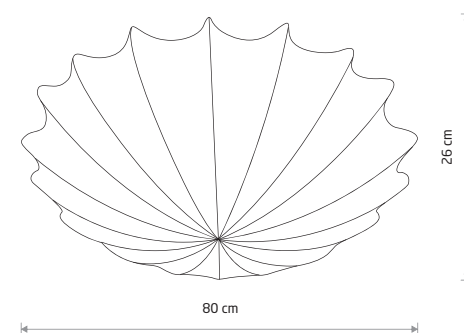

FORM L
fabric, painted steel

9672

4xE27, max 25W only LED

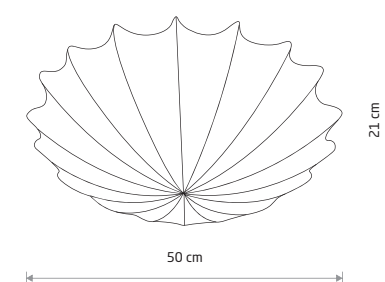

FORM M
fabric, painted steel

9673

2xE27, max 25W only LED



CAMERON 9606




CAMERON 9687



CAMERON 9605




CAMERON 9682



CAMERON
fabric, plastic, painted steel

9605


2xE27, max 15W only LED



CAMERON
fabric, plastic, painted steel

9606


4xE27, max 15W only LED



CAMERON
fabric, plastic, painted steel

9682

4xE27, max 15W only LED



CAMERON
fabric, plastic, painted steel

9687

2xE27, max 15W only LED




VIVIANE 6772



VIVIANE 6773



VIVIANE 6390

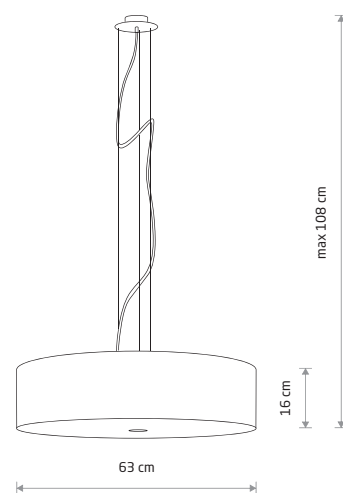


VIVIANE

fabric, glass, chrome

6772 6773 6774

3xE27, max 25W only LED



VIVIANE

fabric, glass, chrome

6391 6532 6390

3xE27, max 25W only LED




VIOLET 7958



VIOLET 7960



VIOLET 7961




VIOLET

fabric, plastic, painted steel

7958 7960 7961

3xE27, max 25W only LED

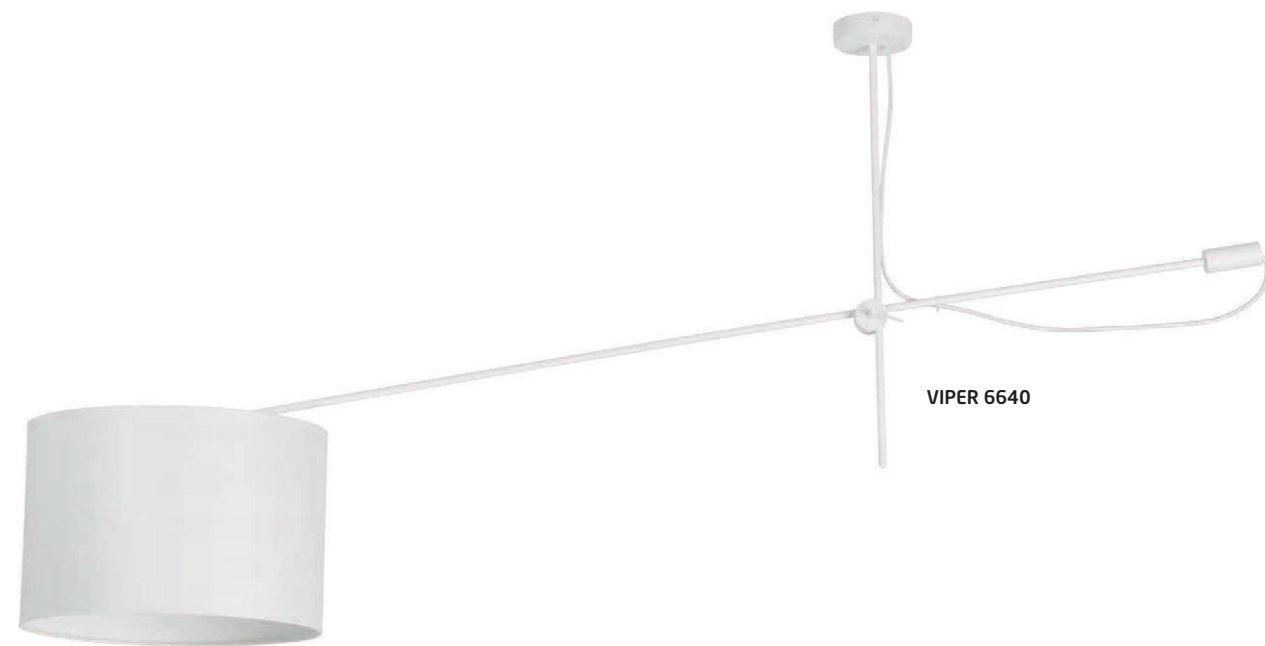


VIPER 6640

VIPER



fabric, painted steel

6640 6641

1xE27, max 25W only LED

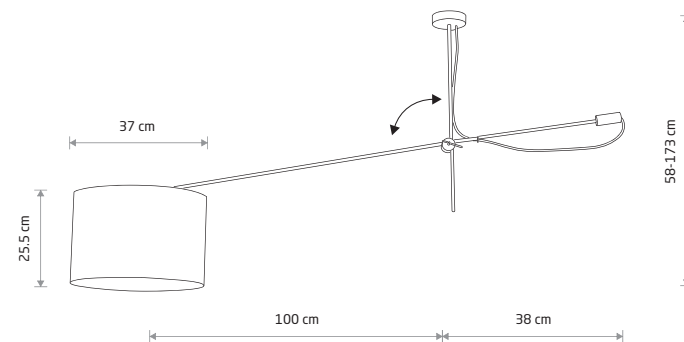

FALCON 7950

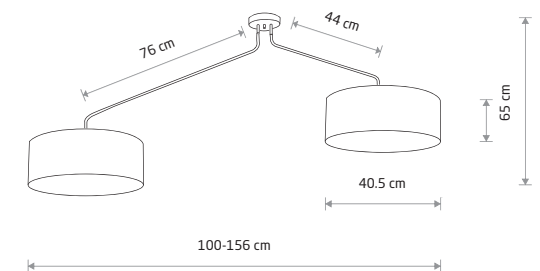

FALCON

fabric, plastic, painted steel

7951 7950


6xE27, max 25W only LED

VIPER

fabric, painted steel, chrome

6512 6513


1xE14, max 10W only LED

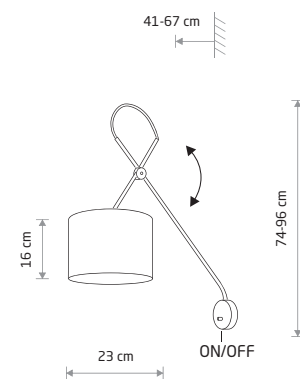

VIPER 6513




ALICE 9091

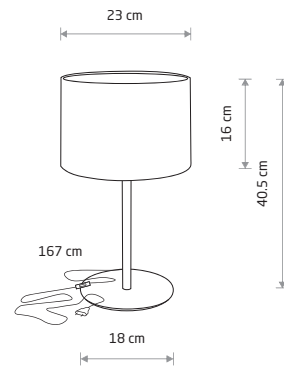

ALICE
fabric, painted steel

9091


1xE27, max 10W only LED

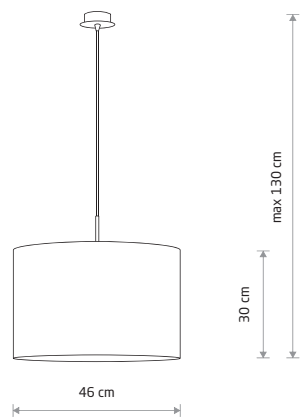

ALICE L
fabric, painted steel

4961


1xE27, max 25W only LED



ALICE
fabric, painted steel

9084

1xE27, max 10W only LED

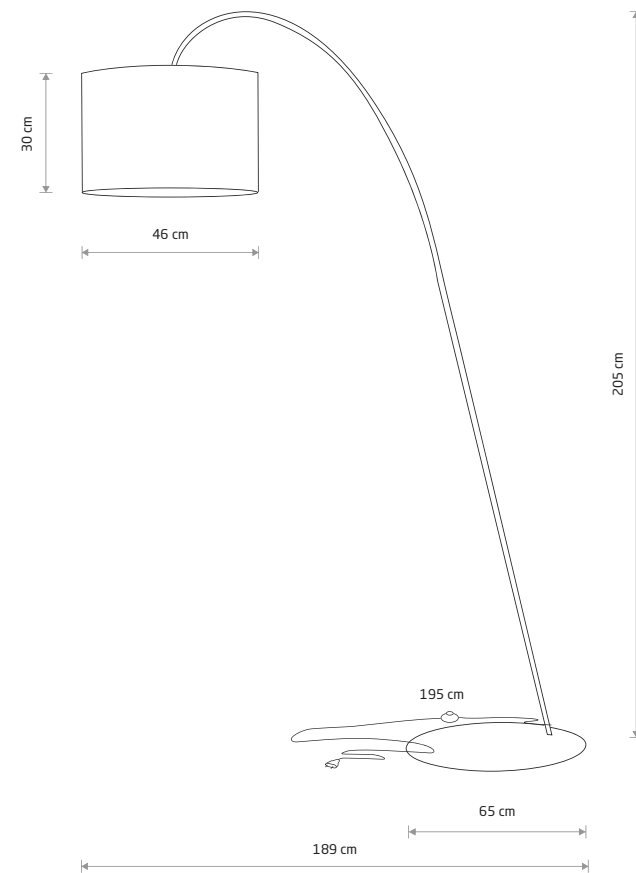

ALICE 4963


ALICE L
painted steel, fabric

4963

1xE27, max 25W only LED



HOTEL MOOD 11788




HOTEL MOOD

fabric, chrome plated steel

11781 11788

1xE14, max 10W only LED



HOTEL MOOD

fabric, chrome plated steel

11780 11787


1xE27, max 25W only LED



HOTEL MOOD 11787



HOTEL MOOD LED
11793




HOTEL MOOD LED

fabric, chrome plated steel

11785 11793

1xE27, max 25W only LED, 1x2.2W LED



HOTEL MOOD

fabric, chrome plated steel

11784 11792


2xE27, max 25W only LED



HOTEL MOOD 11792



HOTEL MOOD
11783



HOTEL MOOD

fabric, chrome plated steel, plastic


11783 11791



1xE27, max 25W only LED



HOTEL MOOD
11778




HOTEL MOOD

fabric, painted steel


11778 11786



1xE27, max 10W only LED

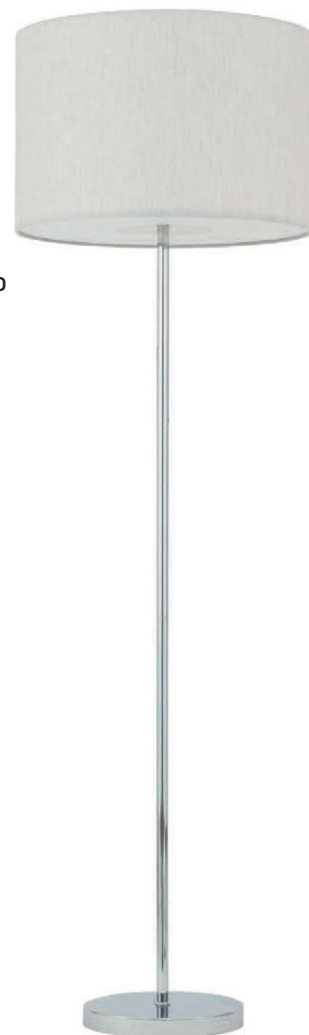

HOTEL MOOD
11782

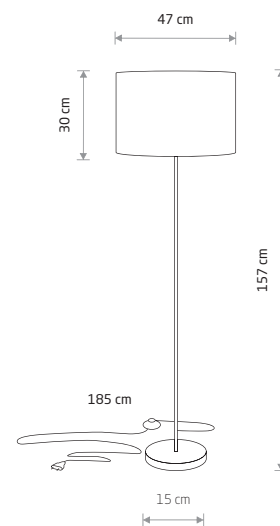

HOTEL MOOD

fabric, painted steel, plastic

11782 11790




1xE27, max 25W only LED



HOTEL MOOD 11791

HOTEL PLUS
9071

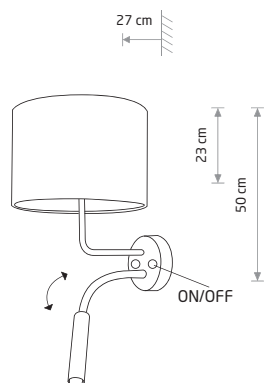


HOTEL PLUS
fabric, painted steel, flexible stem

9071

1xE27, max 25W only LED, 1xG9, max 10W only LED



HOTEL PLUS
9072

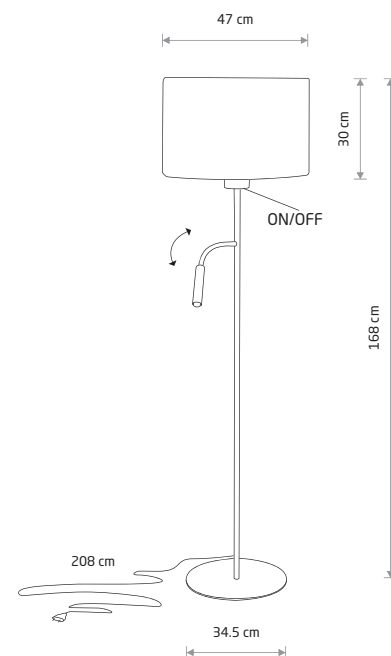

HOTEL PLUS
fabric, painted steel, flexible stem

9072

1xE27, max 25W only LED, 1xG9, max 10W only LED


MOSS 9737



MOSS
fabric, plywood, painted steel

9736

3xE27, max 25W only LED

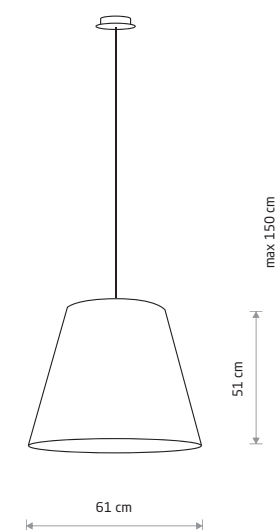


MOSS
fabric, painted steel

9737

3xE27, max 25W only LED

CHILLIN 8213

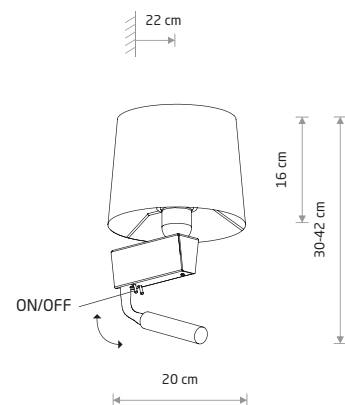

CHILLIN

fabric, painted steel, flexible stem

8216

1xE27, max 10W only LED, 1xG9, max 10W only LED

fabric, painted steel, solid brass, flexible stem


8213

1xE27, max 10W only LED, 1xG9, max 10W only LED

CHILLIN 8197



CHILLIN 8201

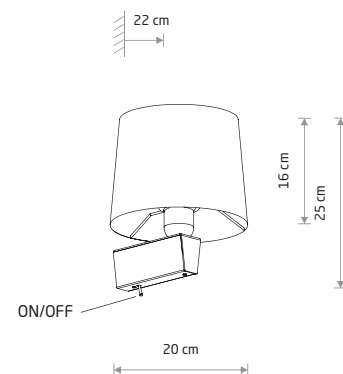


CHILLIN

fabric, painted steel

8201 8197

1xE27, max 10W only LED

LUSSO 11521

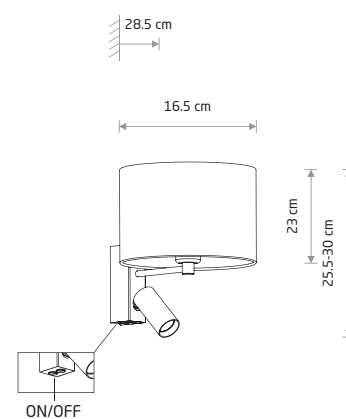

LUSSO

fabric, painted steel

11520 11521

1xE27, 1x GU10 R35 max 10W only LED






DROPS WOOD C
plywood, painted steel

11175

1xE27, max 25W only LED

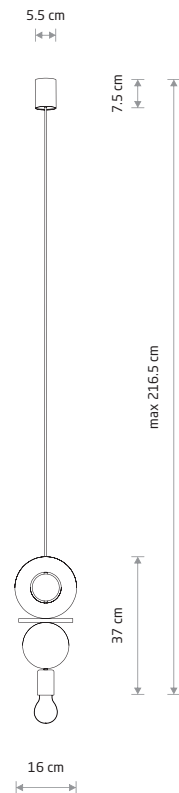

DROPS WOOD E
plywood, painted steel

11177

1xE27, max 25W only LED



DROPS WOOD E
11177




DROPS WOOD F
11180

DROPS WOOD D
plywood, painted steel

11176

1xE27, max 25W only LED

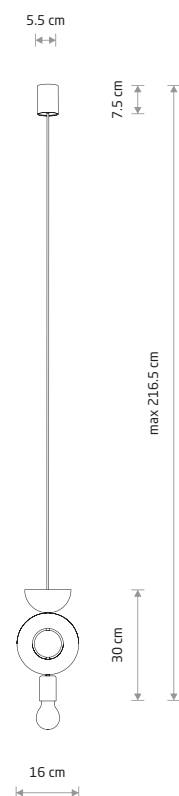

DROPS WOOD F
plywood, painted steel


11180

1xE27, max 25W only LED

DROPS WOOD A
11173



DROPS WOOD B
11174

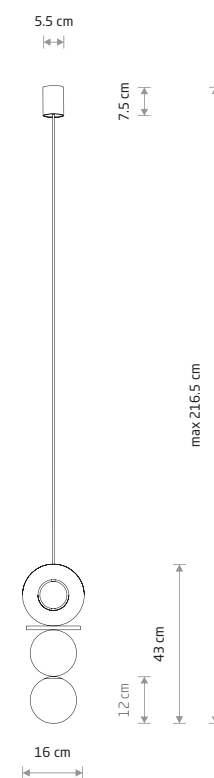


DROPS WOOD A
plywood, glass, painted steel

11173

1xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K

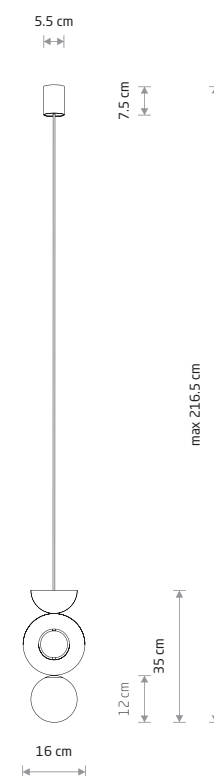

DROPS WOOD B
plywood, glass, painted steel

11174

1xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K

DROPS WOOD A
11173






SUNSET B
7655

SUNSET C
7654



SUNSET C 7654

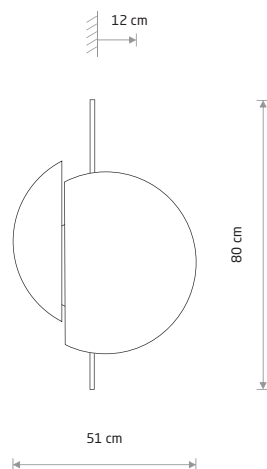

SUNSET C

plywood, painted steel

7654


2xGX53, max 12W only LED

SUNSET NATURAL B

plywood, painted steel

10577


2xGX53, max 12W only LED

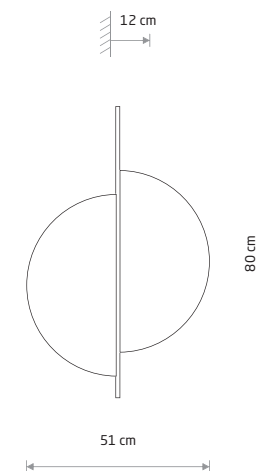

SUNSET NATURAL B
10577



SUNSET B 7655

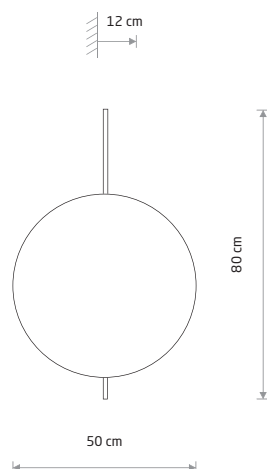

SUNSET B

plywood, painted steel

7655


2xGX53, max 12W only LED

SUNSET NATURAL C

plywood, painted steel

10578


2xGX53, max 12W only LED

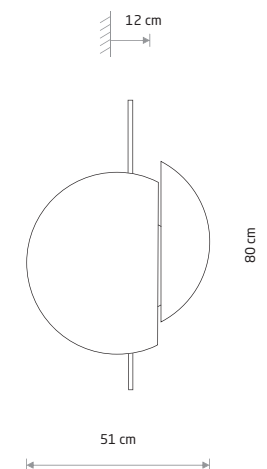

SUNSET NATURAL C
10578



SUNSET A 7653

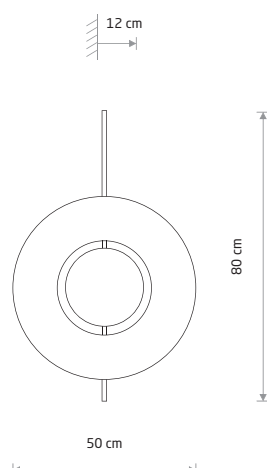

SUNSET A

plywood, painted steel

7653


2xGX53, max 12W only LED

SUNSET NATURAL A

plywood, painted steel

10576


2xGX53, max 12W only LED

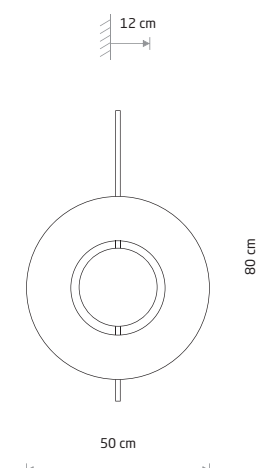

SUNSET NATURAL A
10576



SUNSET LED D
11432




SUNSET LED D
plywood, painted aluminum, painted steel

11432



SUN LED 7651




SUN LED
plywood, painted steel

7651



SUNRISE LED
7652

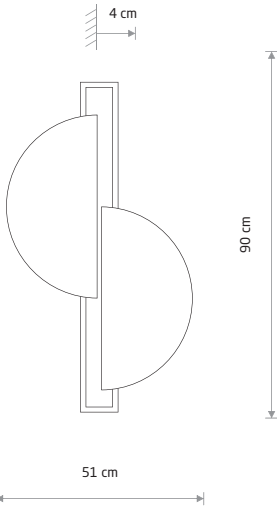


SUNRISE LED
plywood, painted steel

7652



SUNSET 7647

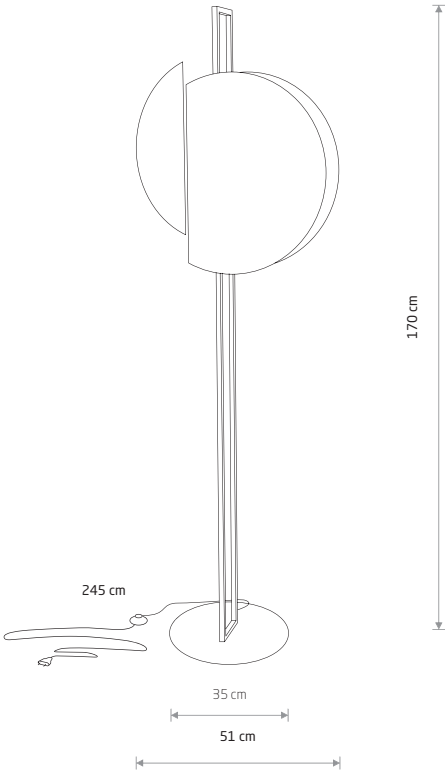

SUNSET
plywood, painted steel


7647



2xGX53, max 12W only LED

Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
7652	14W LED	3000K	340 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h
11432	7W LED	3000K	65 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
7651	15W LED	3000K	610 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h

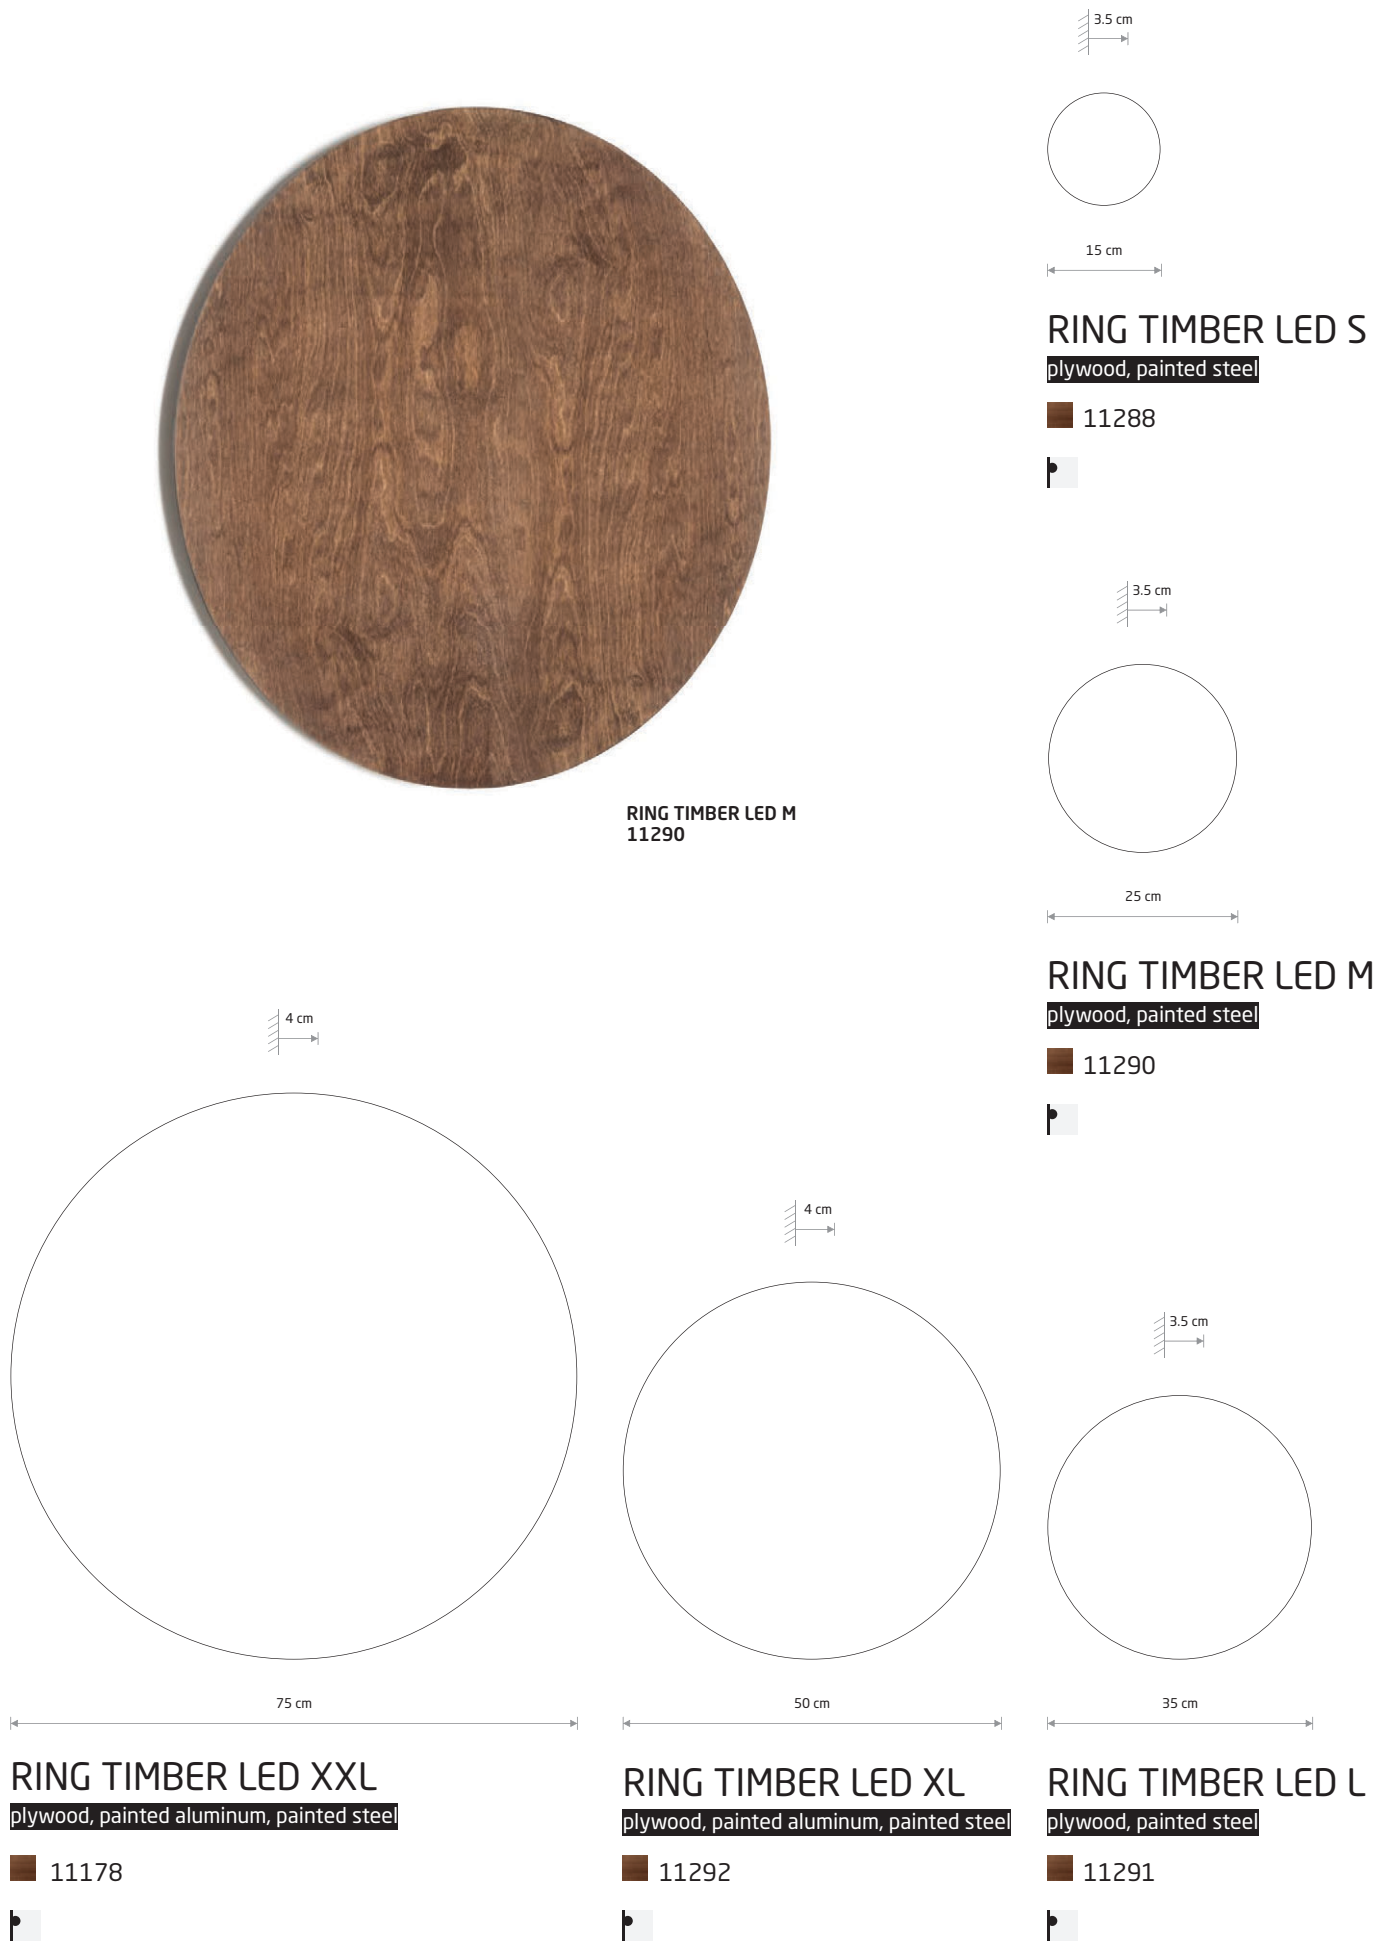


 DARK WOOD



Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11288	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11290	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11291	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11292	16W LED	3000K	290 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
11178	22W LED	3000K	400 lm	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h



WHEEL 9028

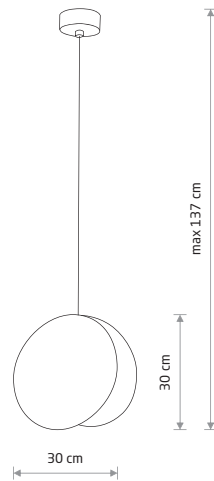


WHEEL

plywood, painted steel

9028 9033

1xE27, max 10W only LED

WHEEL LUX 8430

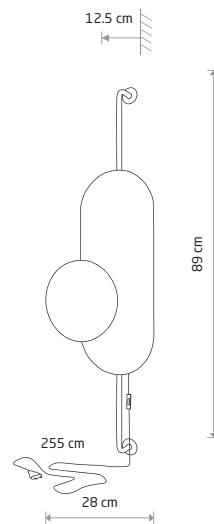


WHEEL LUX

plywood, painted steel

8430

1xG9, max 10W only LED

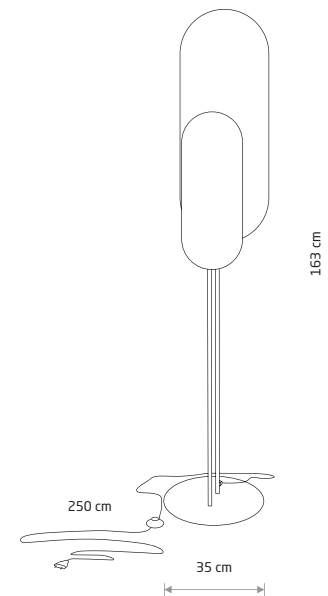

WHEEL LUX

plywood, painted steel

7646


2xGX53, max 12W only LED



WHEEL LUX 7646




RING WOOD LED M
10281

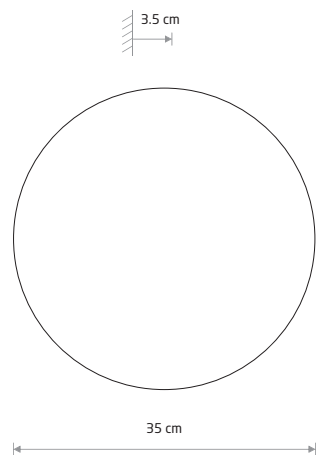

RING WOOD LED L

plywood, painted steel


10282

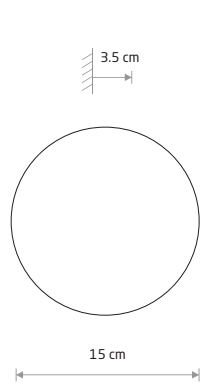

RING WOOD LED S

plywood, painted steel

10280

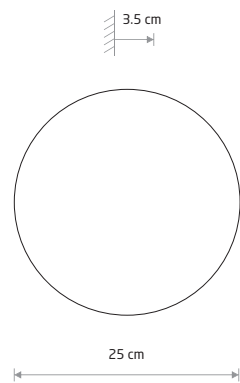

RING WOOD LED M

plywood, painted steel

10281



Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10280	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10281	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10282	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

GOLD



RING WOOD LED M
10281



RING WOOD LED S
10280



DISK 7644



HEFT 10356

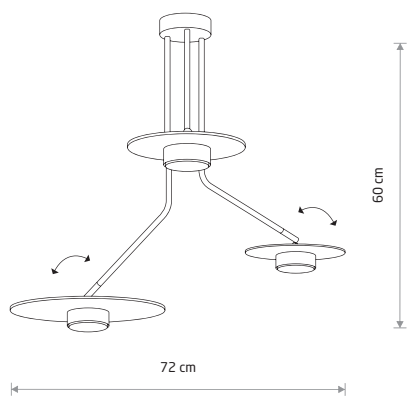

DISK

painted steel, plywood

7644



3xGX53, max 12W only LED


DISK

painted steel, plywood

7645



1xGX53, max 12W only LED

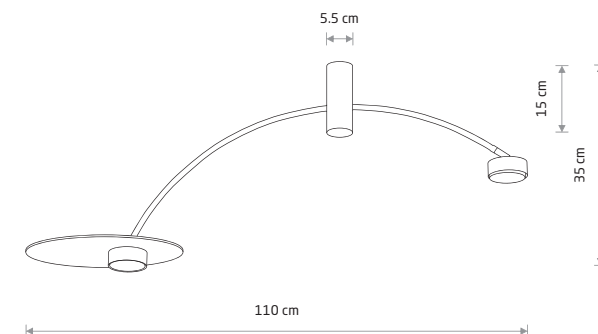

HEFT

painted steel, plywood

10356




2xGX53, max 12W only LED



KYMI B 10571

KYMI A 10570

KYMI A 10573

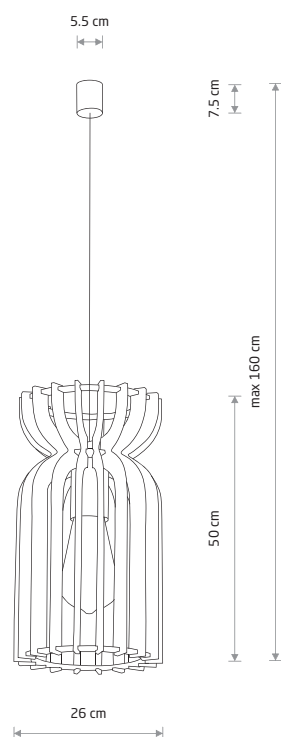


KYMI A
plywood, painted steel, braided cable

10570 10573

1x E27, max 25W only LED




KYMI B 10571

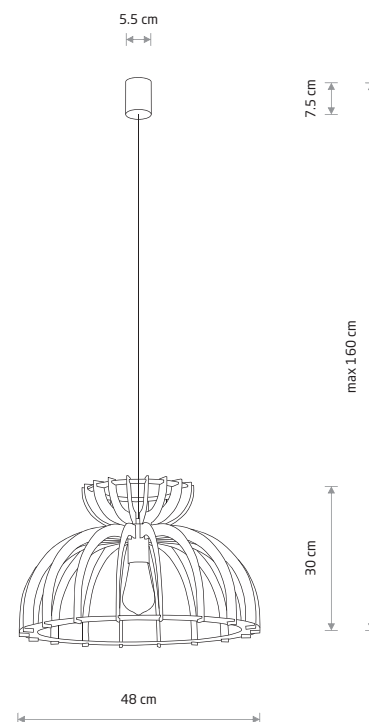

KYMI C
plywood, painted steel, braided cable

10572 10575

1x E27, max 25W only LED

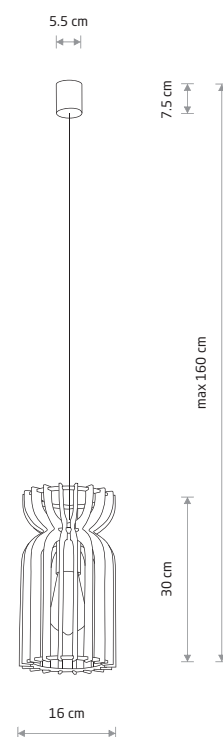


KYMI B
plywood, painted steel, braided cable

10571 10574

1x E27, max 25W only LED



IKA A 4171

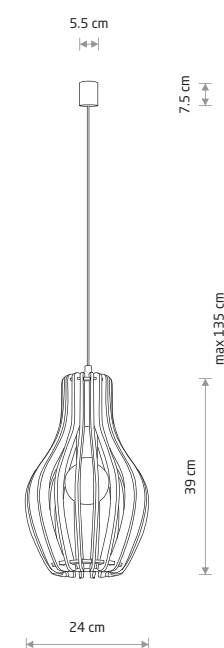


IKA A
plywood, painted steel

4171

1x E27, max 25W only LED



IKA D 4174

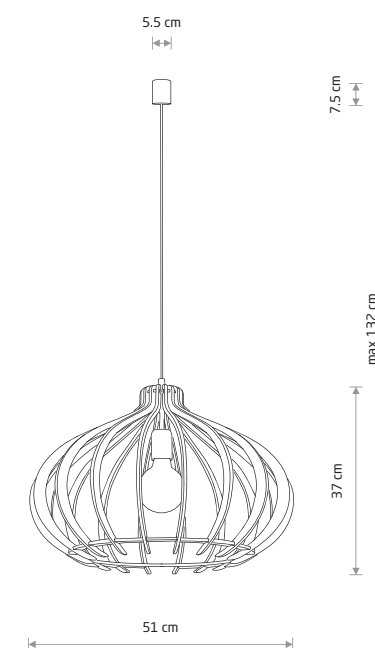


IKA D
plywood, painted steel

4174

1x E27, max 25W only LED




DOVER 9263

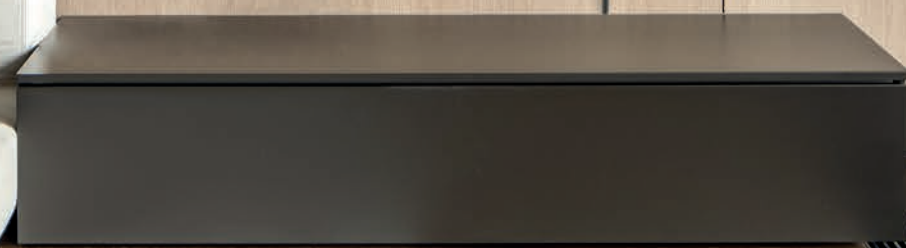



DOVER 9263

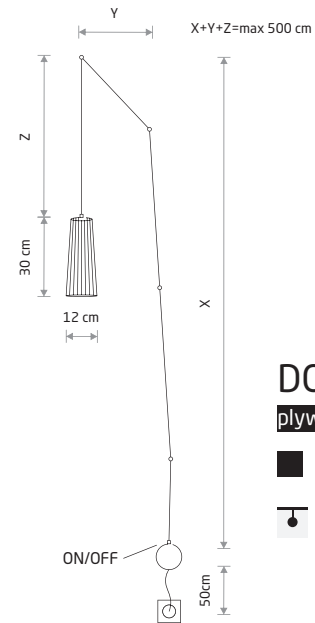


DOVER

plywood, braided cable, painted steel

9264

1xGU10 R50, max 10W only LED

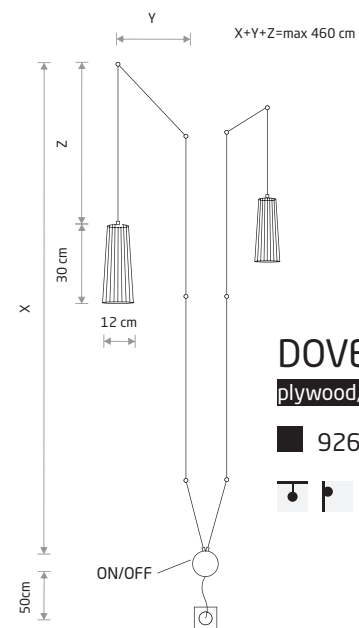

DOVER

plywood, braided cable, painted steel

9263


2xGU10 R50, max 10W only LED



DOVER 9261



DOVER 9266

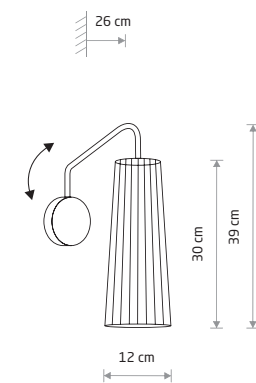

DOVER


plywood, painted steel

9261

9266

1xGU10 R50, max 10W only LED

MINIMAL 9377




MINIMAL
wood, painted steel

9377

1xG9, max 10W only LED

OSLO 30 9700



OSLO 30
wood, painted steel


9700

1xE14, max 15W only LED

OAK WHITE P004 RAL 9003



OSLO LED 7522

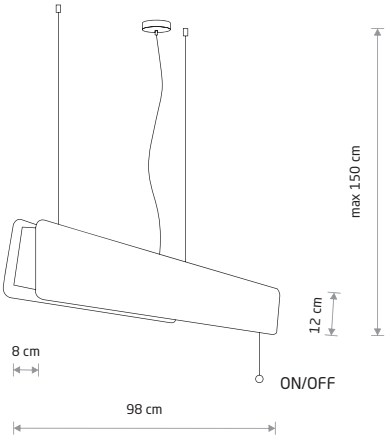

OSLO LED 90
wood, painted steel

7522 7520

1xLED TUBE T8, max 16W, included

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	LED driver	Lifetime	Material
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0,5	INCL	30000h	CLEAR GLASS

OAK SMOKED OAK WHITE P004 RAL 9003




RATTAN L
11155




RATTAN S
11153



PUKET M
11161

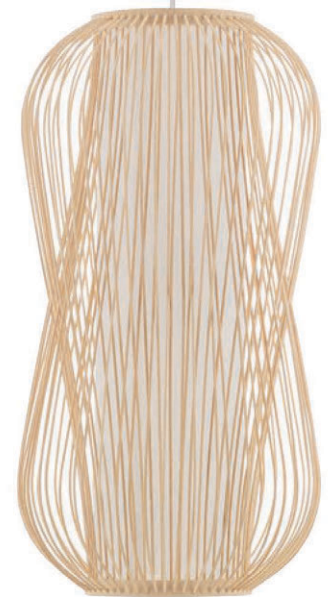


PUKET L
11162

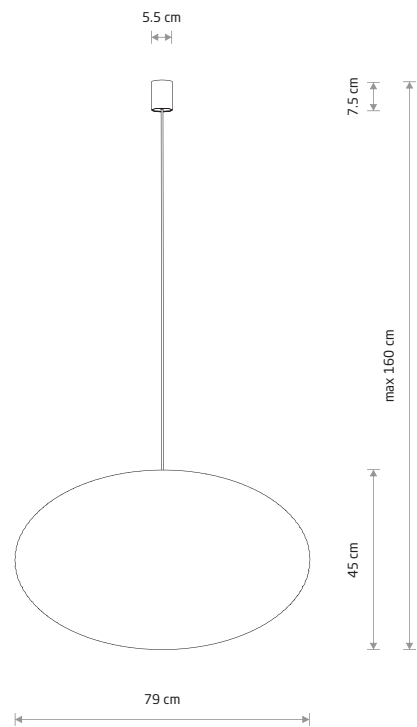

RATTAN L
rattan, painted steel

11155


1xE27, max 25W only LED

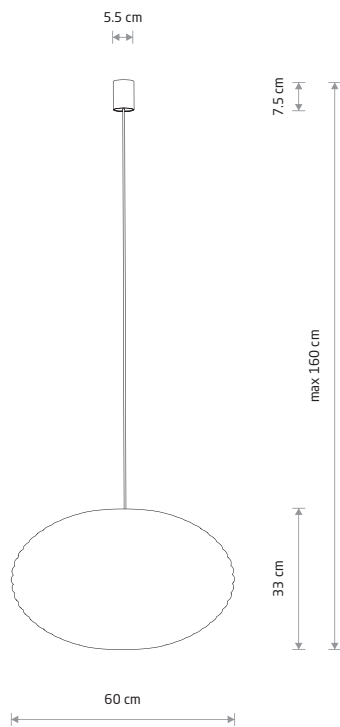

RATTAN M
rattan, painted steel

11154


1xE27, max 25W only LED

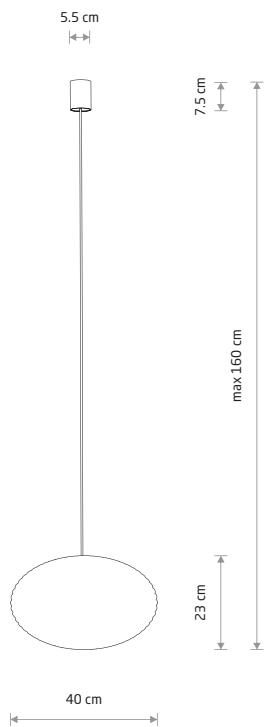

RATTAN S
rattan, painted steel

11153


1xE27, max 25W only LED

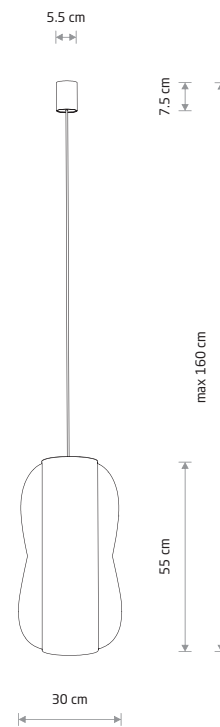

PUKET L
bamboo, painted steel

11162


1xE27, max 25W only LED

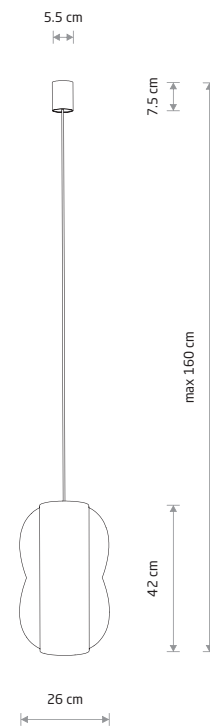

PUKET M
bamboo, painted steel

11161

1xE27, max 25W only LED

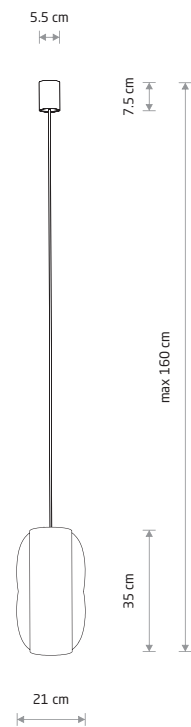


PUKET S
bamboo, painted steel

11160

1xE27, max 25W only LED




HAVANA S 11170

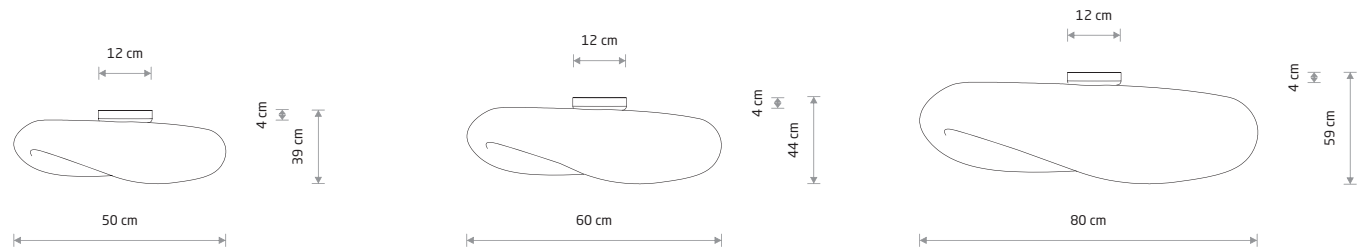


HAVANA S
bamboo, painted steel, plastic ABS

- 11170
- 1x E27, max 25W only LED

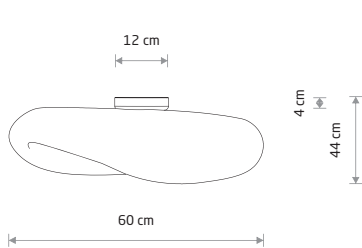

HAVANA M
bamboo, painted steel, plastic ABS

- 11171
- 1x E27, max 25W only LED

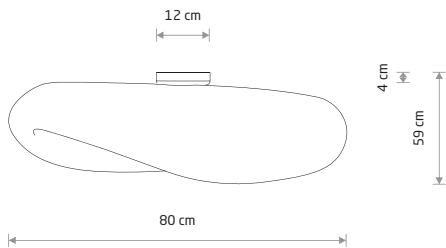


HAVANA L
bamboo, painted steel, plastic ABS

- 11172
- 1x E27, max 25W only LED

NATURAL WOOD WHITE P003 RAL 9003



HAVANA M 11396

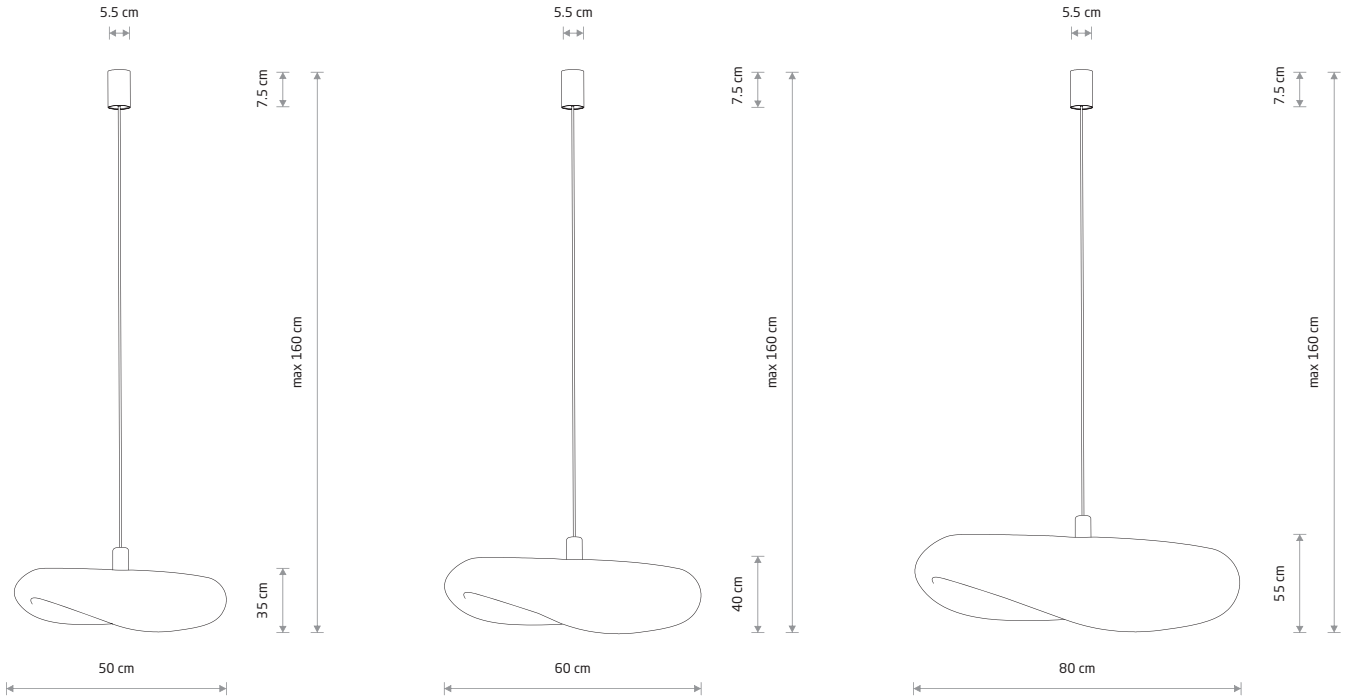

HAVANA S
bamboo, painted steel

- 11395
- 1x E27, max 25W only LED

HAVANA M
bamboo, painted steel

- 11396
- 1x E27, max 25W only LED

HAVANA L
bamboo, painted steel

- 11397
- 1x E27, max 25W only LED

NATURAL WOOD WHITE P004 RAL 9003




HAITI S
11166



HAITI L
11168




BOHO S
11150

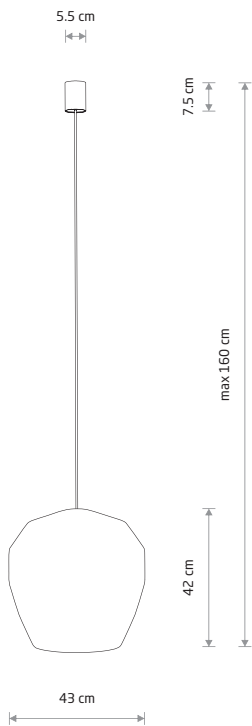


HAITI S
bamboo, painted steel
11163 11166

1x E27, max 25W only LED

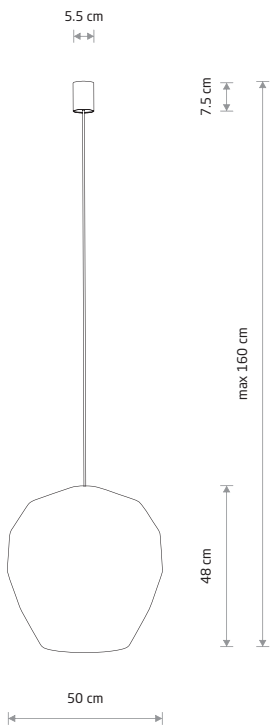


HAITI M
bamboo, painted steel
11164 11167

1x E27, max 25W only LED

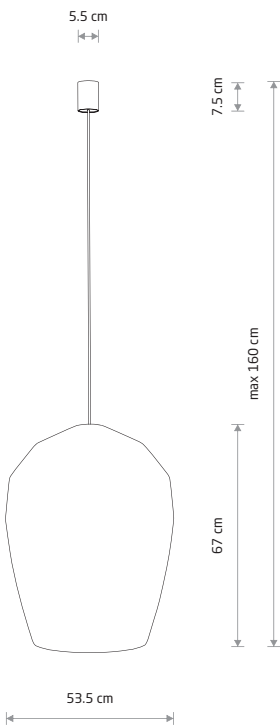


HAITI L
bamboo, painted steel
11165 11168

1x E27, max 25W only LED

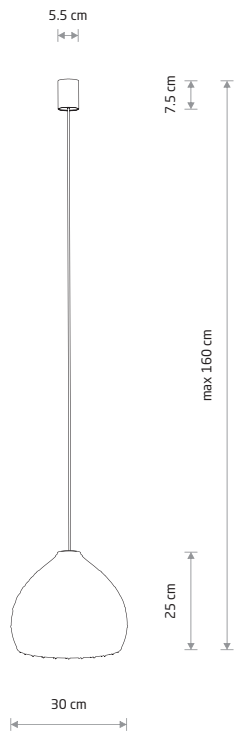


BOHO S
rattan, painted steel
11150

1x E27, max 25W only LED

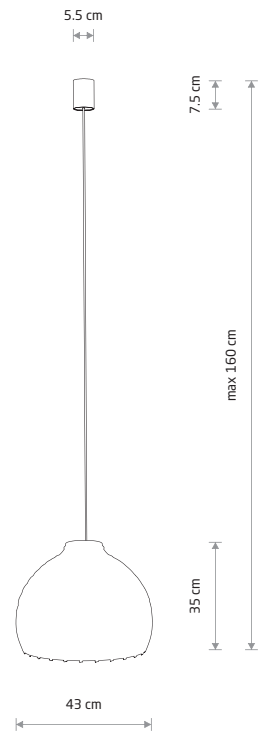

BOHO M
rattan, painted steel
11151

1x E27, max 25W only LED

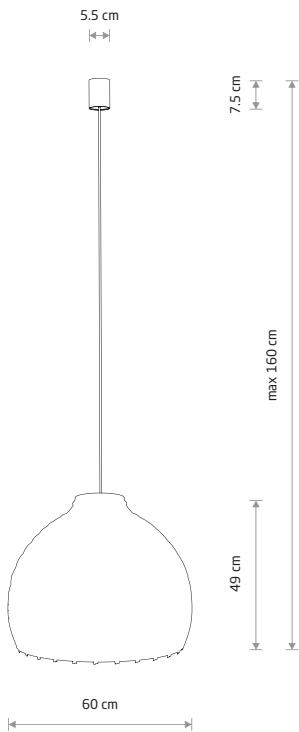


BOHO L
rattan, painted steel
11152

1x E27, max 25W only LED




JAPANDI S
11156

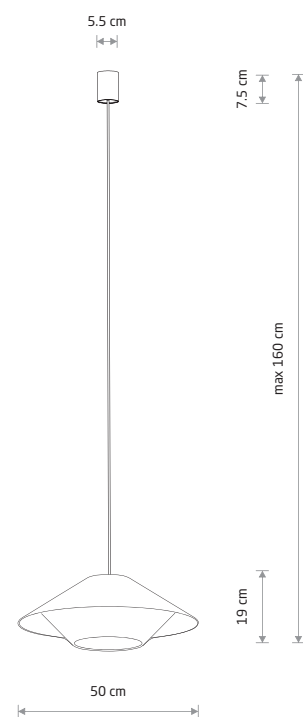

JAPANDI S
paper rope, painted steel

11156

1xE27, max 25W only LED

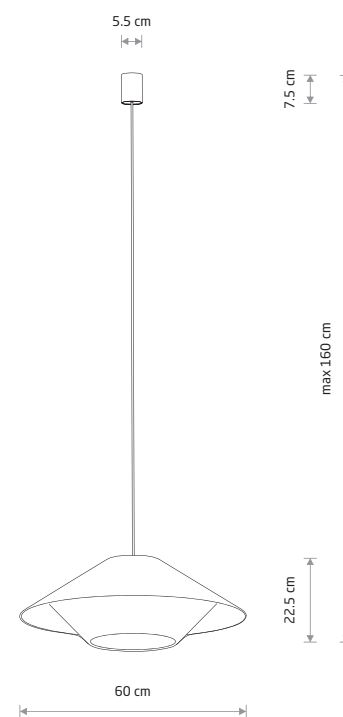


JAPANDI M
paper rope, painted steel

11157

1xE27, max 25W only LED




KRABI 11158

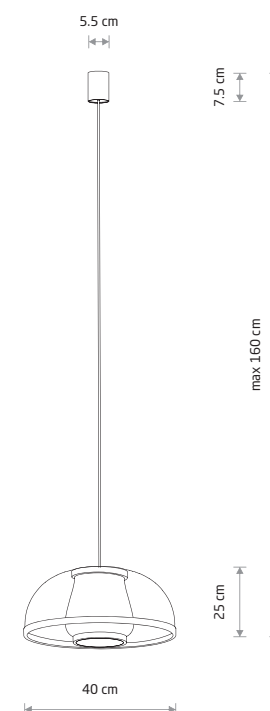


KRABI
bamboo, painted steel

11158


1xE27, max 25W only LED

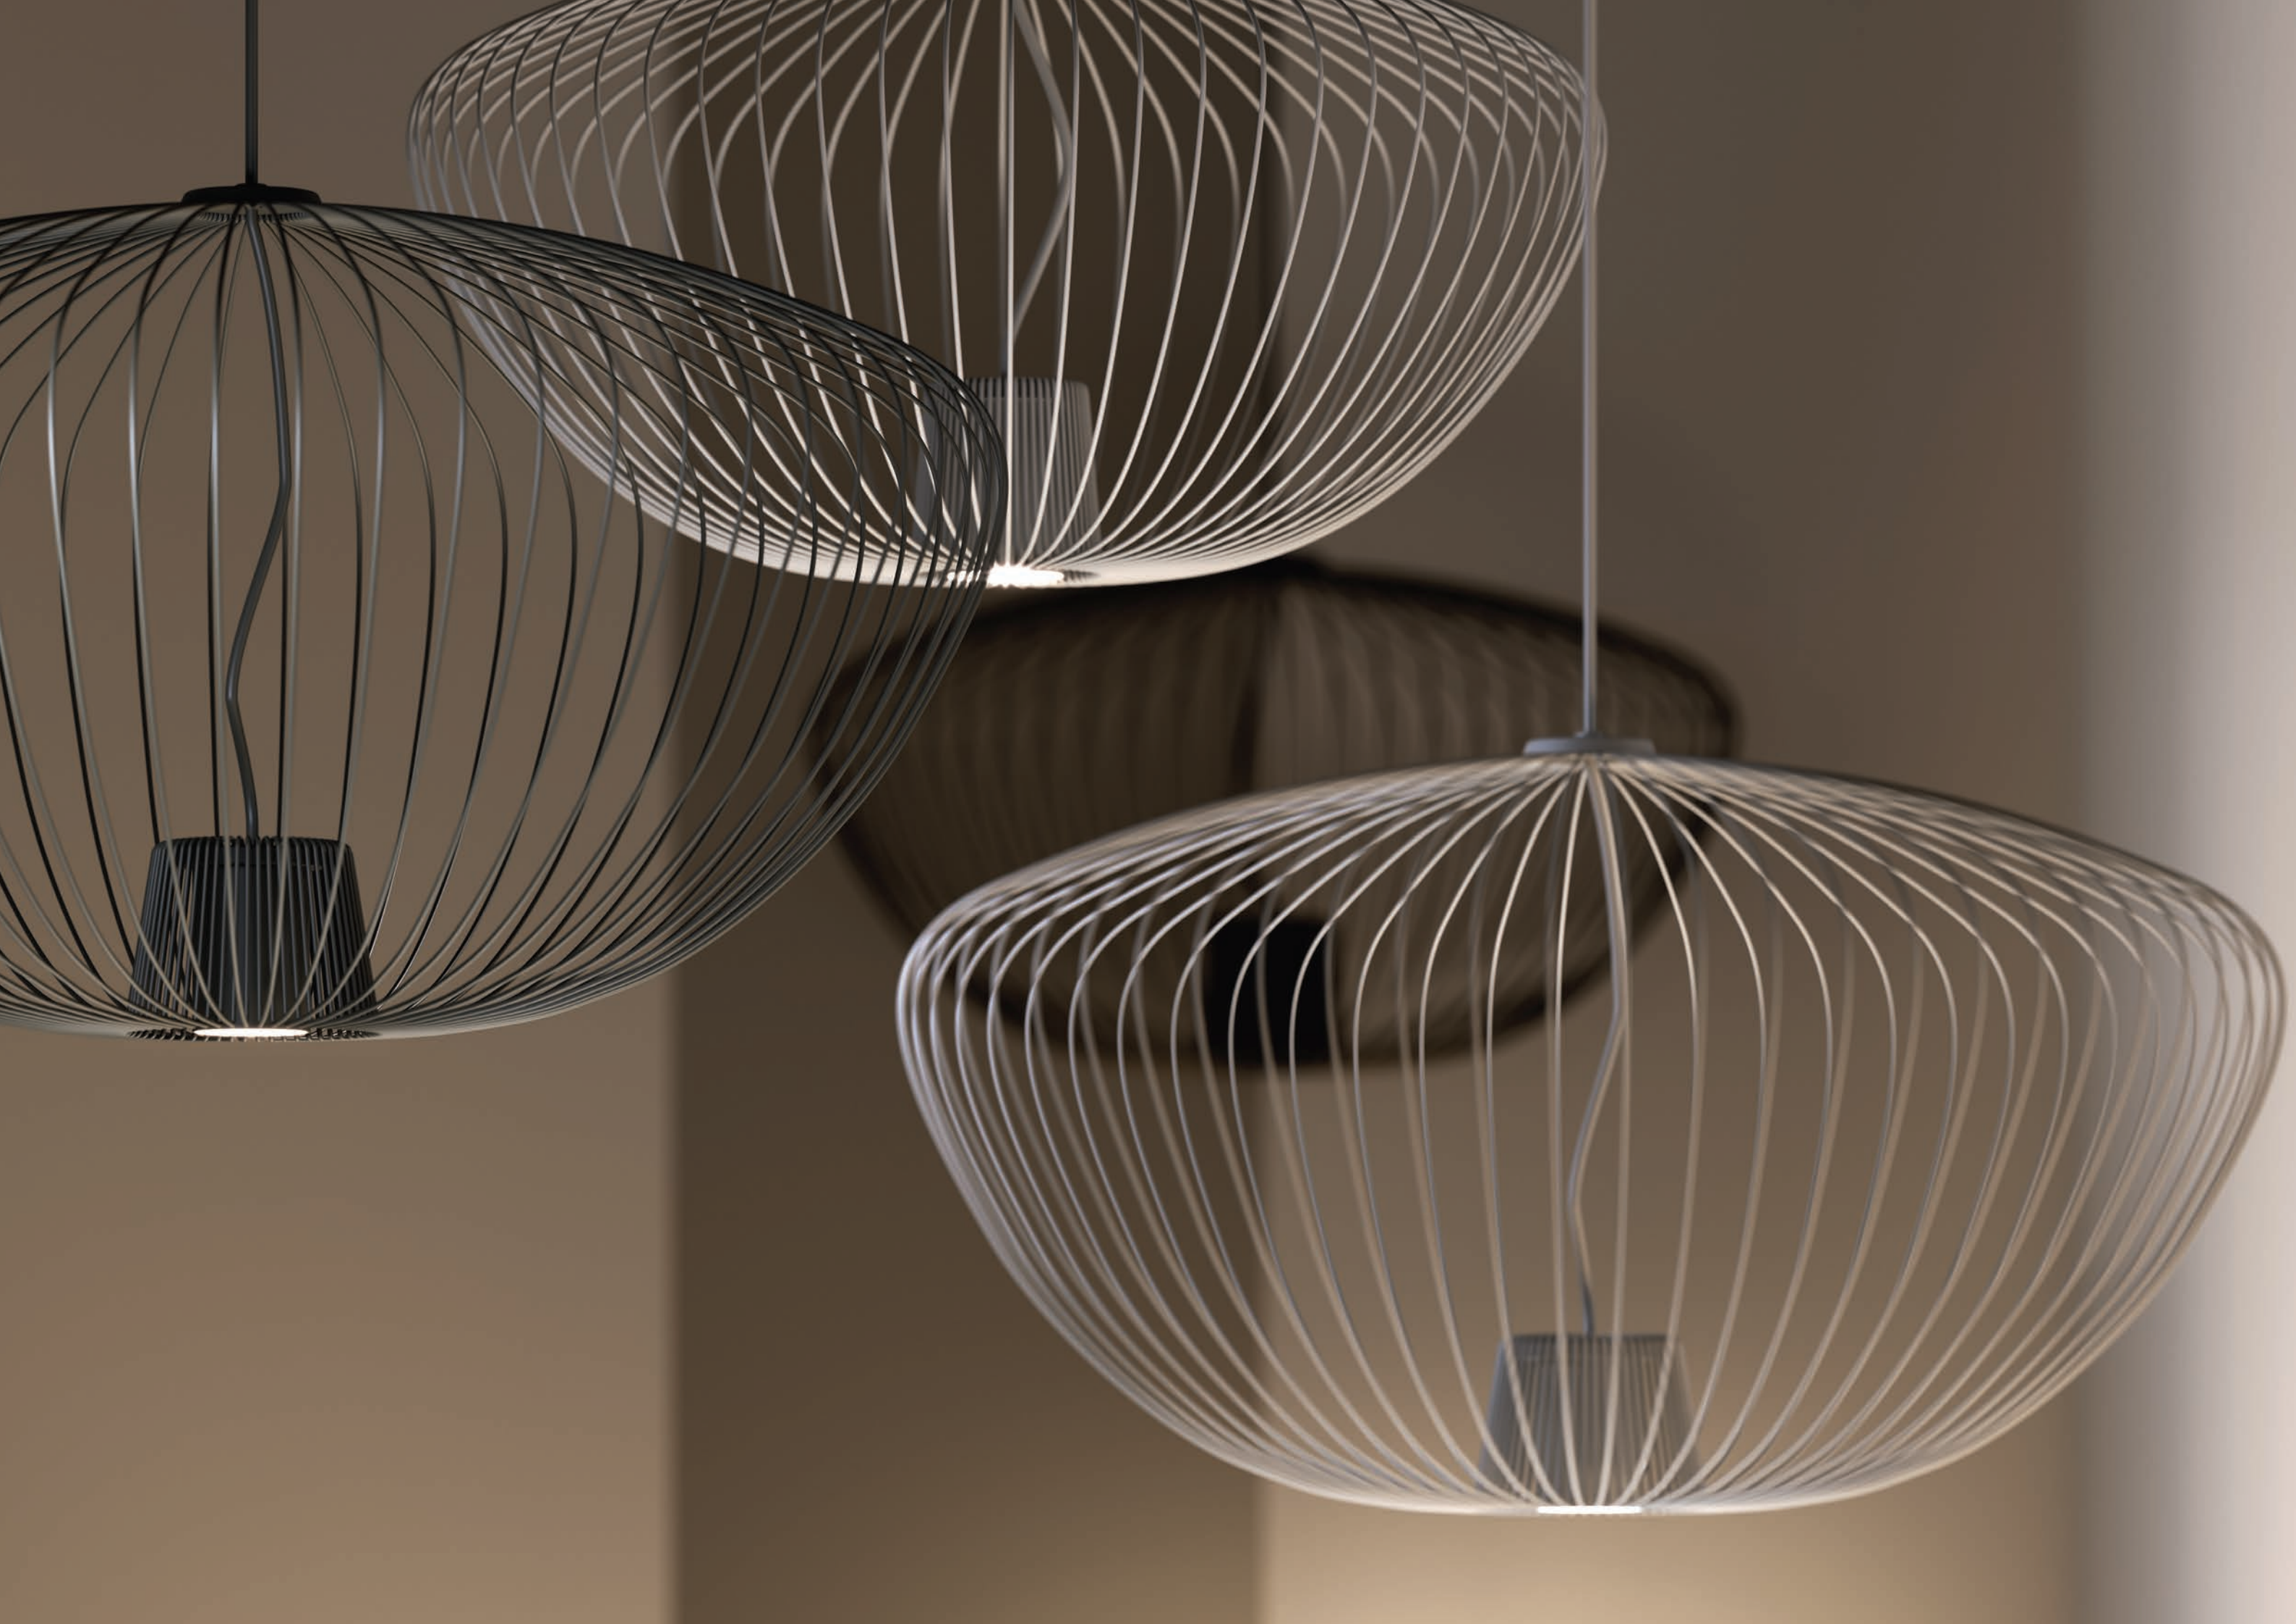

PUMPKIN S
11496

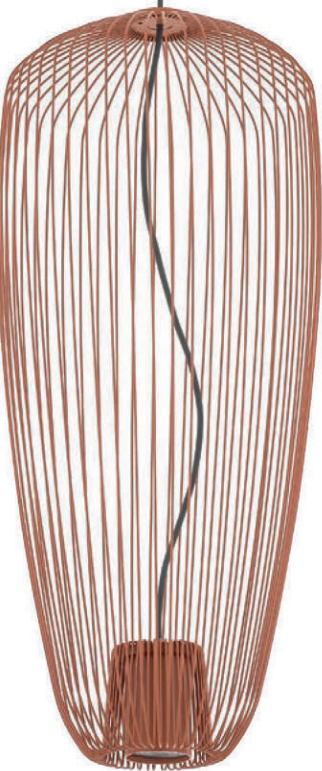

PUMPKIN S
11242

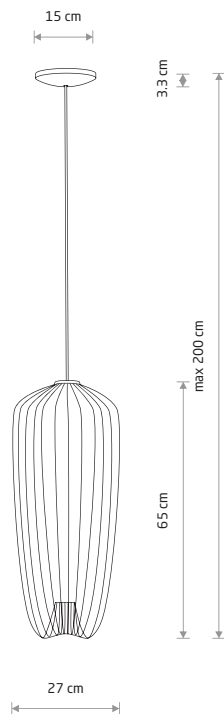


PUMPKIN S

painting steel

11242 11243 11496

1xGU10 R50, max 10W only LED

PUMPKIN L
11252

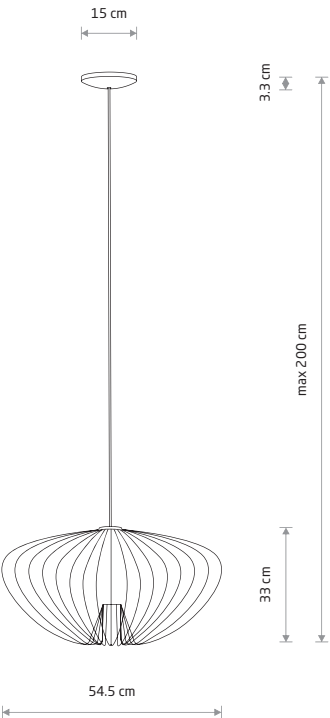


PUMPKIN M

painting steel

11244 11245 11495

1xGU10 R50, max 10W only LED

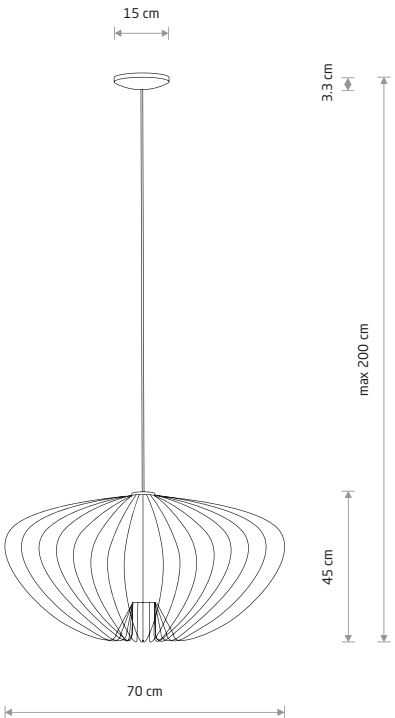

PUMPKIN L


painting steel

11251 11252 11494

1xGU10 R50, max 10W only LED



WAVE S 8858

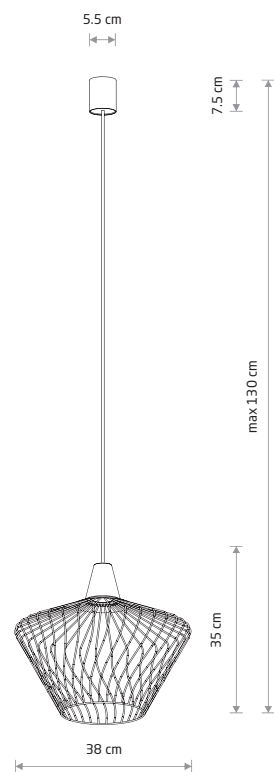

WAVE S

■ painted steel

■ 8858



● 1xE27, max 25W only LED


LUKSOR S

■ painted steel

■ 8851




● 1xE27, max 25W only LED

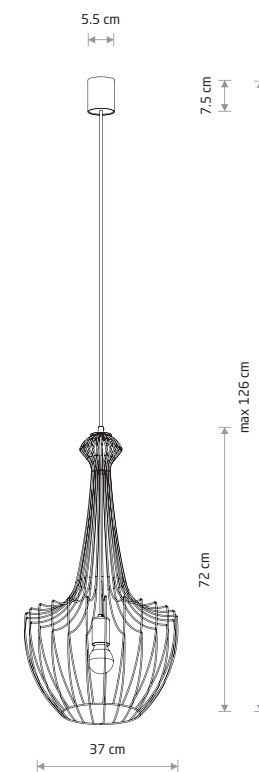

LUKSOR S 8851



NESS 6768

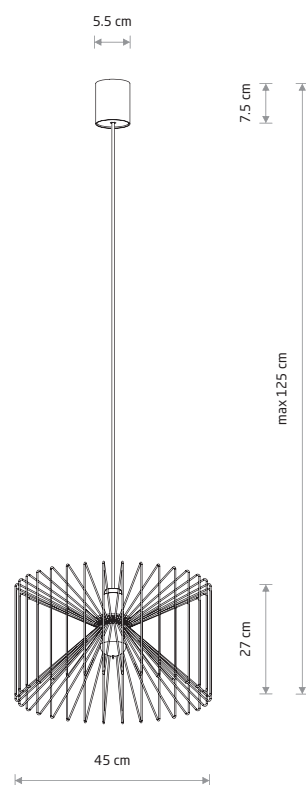

NESS

■ painted steel

■ 6768



● 1xE27, max 25W only LED


ABI L

■ painted steel, fabric

■ 8864




● 1xE27, max 25W only LED

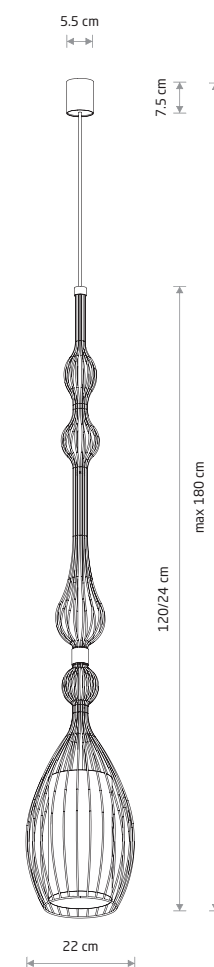

ABI L 8864





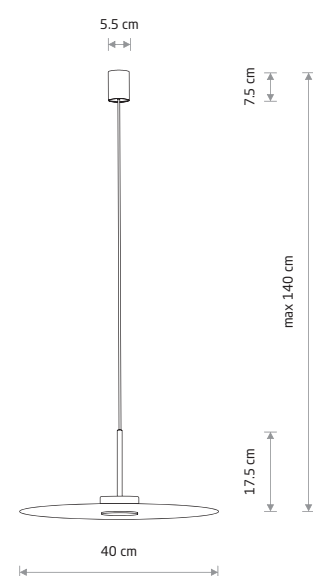

SIMONE painted steel

- 11410 11411 11412
- 11413 11414

1xGX53, max 12W only LED





POINT DUO
11510




POINT DUO
11513



POINT DUO
11511



POINT DUO
11512

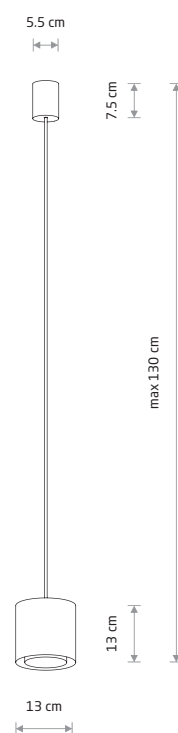

POINT DUO

painting steel, plastic ABS

11510 11511

11512 11513

1xGU10 R50, max 10W only LED

WHITE P004 RAL 9003 BLACK P013 RAL 9005 GOLD P021 SILK GRAY P026 RAL 7044

POINT DUO 11511





ZENITH XS
11456



ZENITH XS 11456



ZENITH XS

painting steel

- 11452 11453 11454
- 11455 11456 11492
- 11493

- 1xGU10 R50, max 10W only LED
- GU10 R35, max 10W only LED




ZENITH S


painting steel

- 10880 10881 11491
- 11488 11490

- 1xGU10, max 10W only LED
- 1xGU10 ES111, max 20W only LED

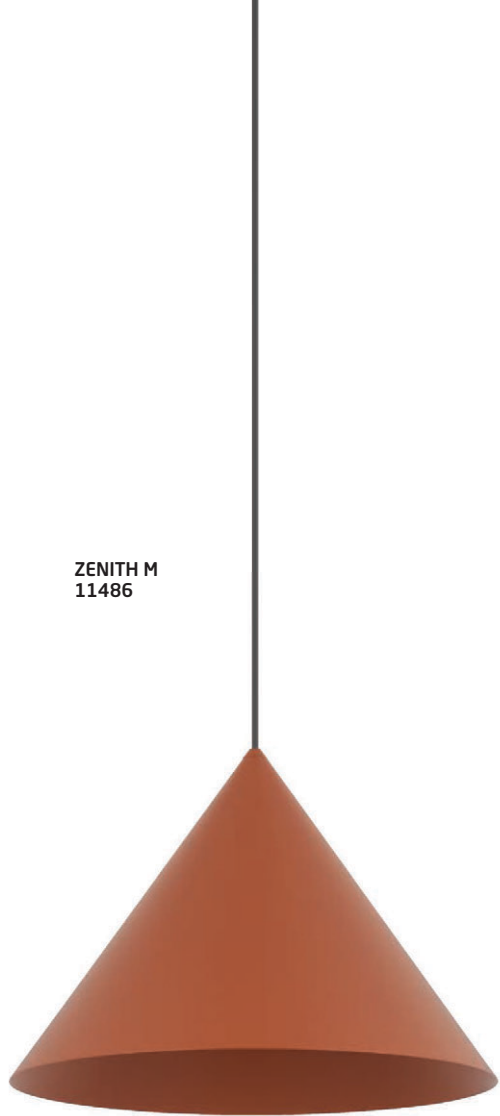

ZENITH M 11486

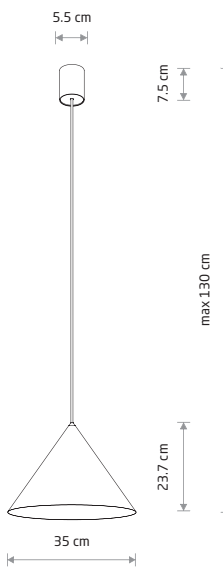


ZENITH M


painting steel

- 10878 10879 11487
- 11485 11486

- 1xGU10, max 10W only LED
- 1xGU10 ES111, max 20W only LED

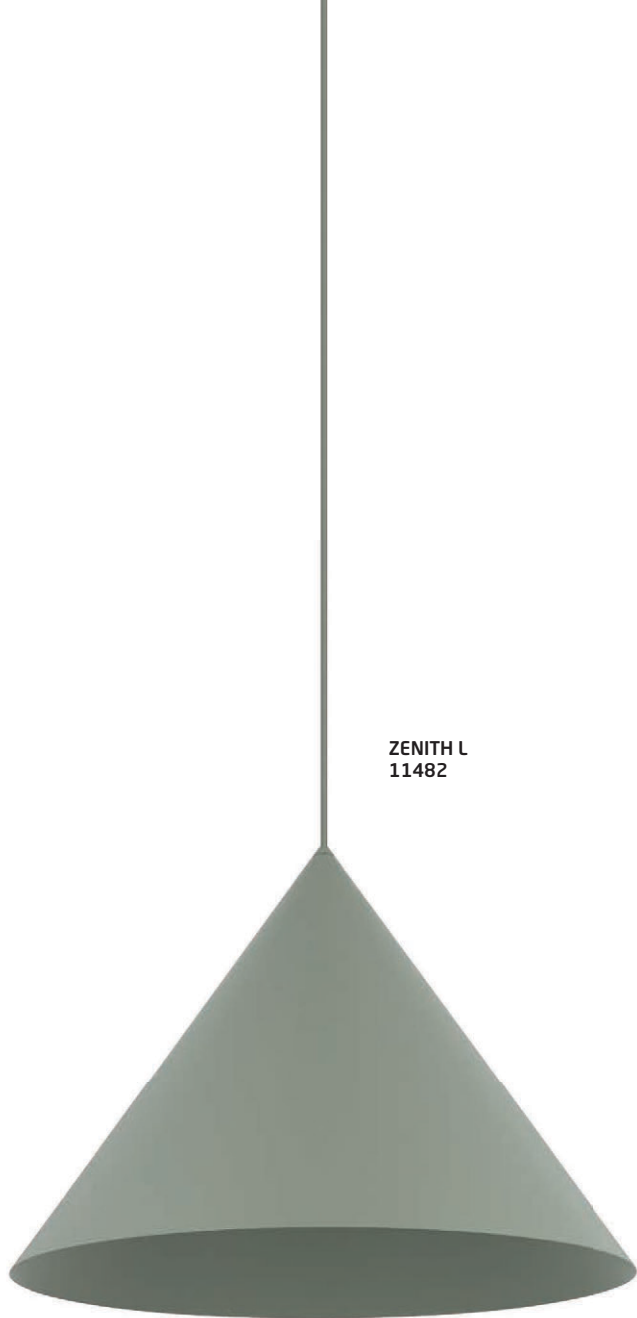

ZENITH L 11482

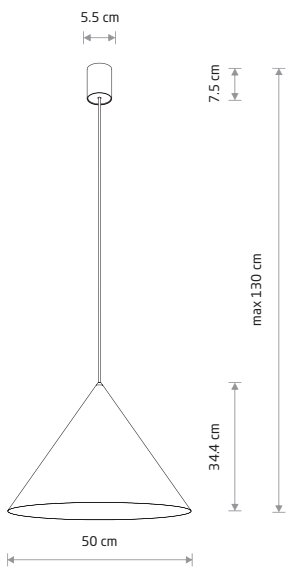


ZENITH L

painting steel

- 10872 10873 11484
- 11482 11483


- 1xGU10, max 10W only LED
- 1xGU10 ES111, max 20W only LED

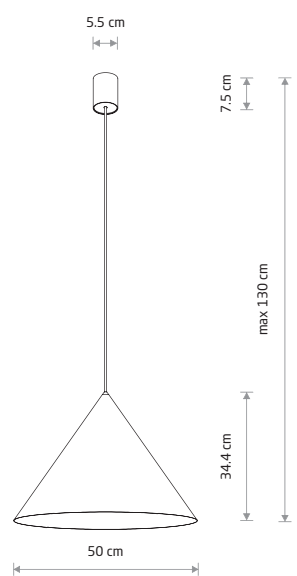

ZENITH L
painted steel, solid brass

8005 8006 8007


- 1xGU10, max 10W only LED
- 1xGU10 ES111, max 20W only LED

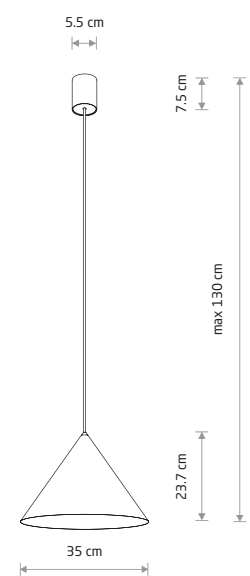

ZENITH M
painted steel, solid brass

8001 8002 8003

- 1xGU10, max 10W only LED
- 1xGU10 ES111, max 20W only LED

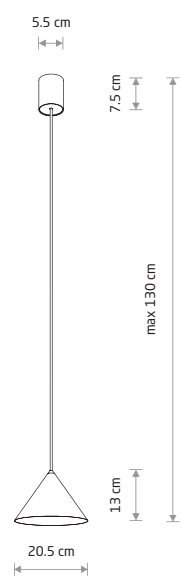

ZENITH S
painted steel, solid brass

7996 7997 7998

- 1xGU10, max 10W only LED
- 1xGU10 ES111, max 20W only LED


BLACK P013 RAL 9005 WHITE P004 RAL 9003 GREEN P022 BRASS




SATELLITE M
11232



Visualisation by Iwona Ligęza

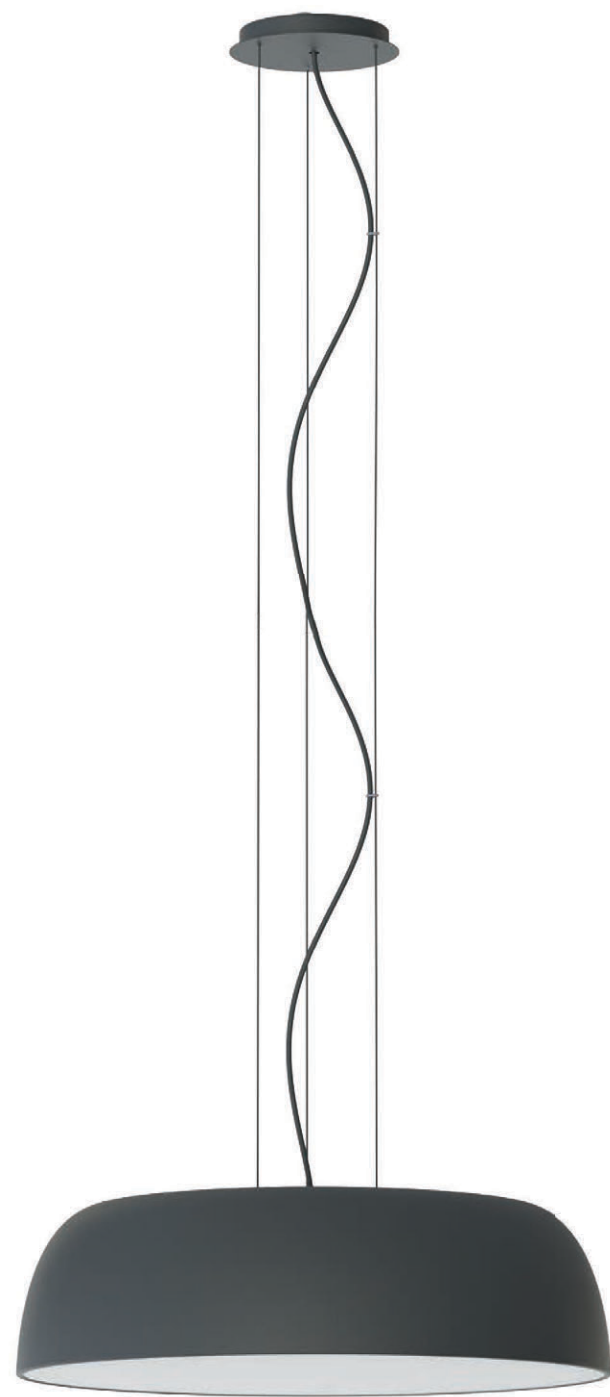

SATELLITE M
11232

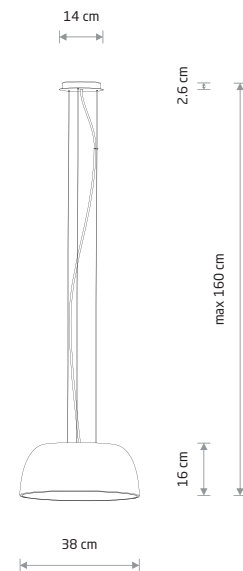


SATELLITE S

painting steel, plastic

11225 11228

11226 11227

3xE27, max 25W only LED

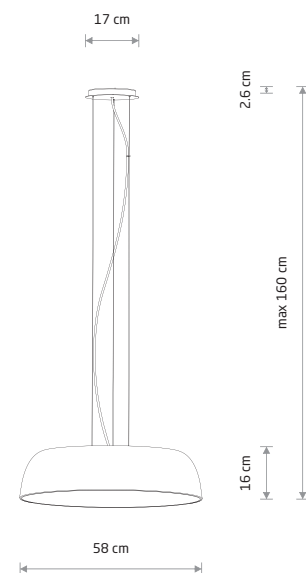

SATELLITE M

painting steel, plastic


11230 11233

11231 11232

7xE27, max 25W only LED



SATELLITE M 8018




SATELLITE S

painting steel, plastic

8013 8012

8014 8015

3xE27, max 25W only LED

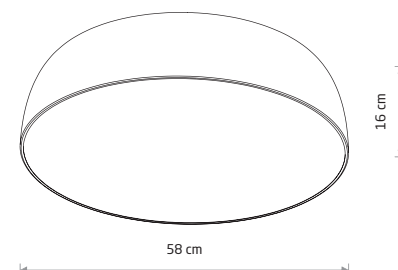

SATELLITE M

painting steel, plastic


8017 8016

8018 8020

7xE27, max 25W only LED



SATELLITE S SENSOR
8011




SATELLITE S SENSOR

painting steel, plastic

8011 8010

3xE27, max 25W only LED

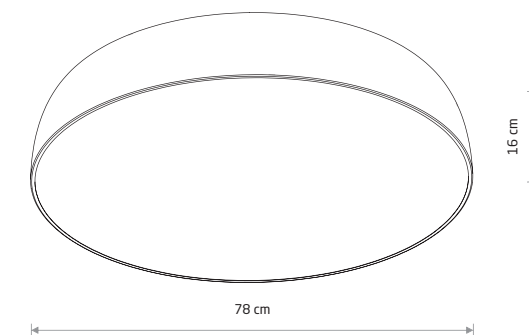

SATELLITE L

painting steel, plastic


8022 8021

8023 8024

10xE27, max 25W only LED



HERMANOS C 8192

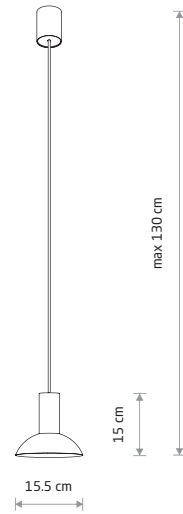

HERMANOS C

■ painted steel, solid brass

■ 8194

■ 1xGU10 R50, max 10W only LED


■ painted steel

■ 8192

■ 1xGU10 R50, max 10W only LED



HERMANOS B 8102

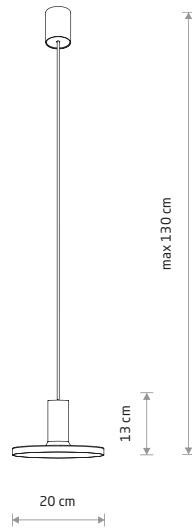

HERMANOS B

■ painted steel, solid brass

■ 8100

■ 1xGU10 R50, max 10W only LED


■ painted steel

■ 8102

■ 1xGU10 R50, max 10W only LED



HERMANOS A 8105

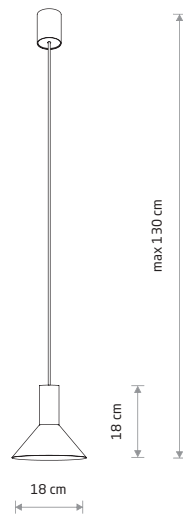

HERMANOS A

■ painted steel, solid brass

■ 8103

■ 1xGU10 R50, max 10W only LED

■ painted steel

■ 8105

■ 1xGU10 R50, max 10W only LED

HERMANOS

■ painted steel, solid brass


■ 8030

■ 3xGU10 R50, max 10W only LED


■ painted steel

■ 10905

■ 3xGU10 R50, max 10W only LED

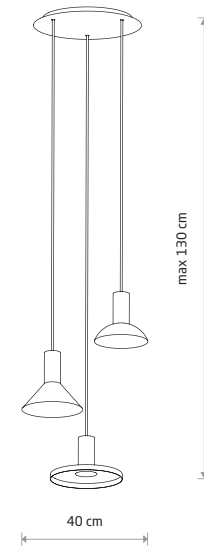

HERMANOS 8032

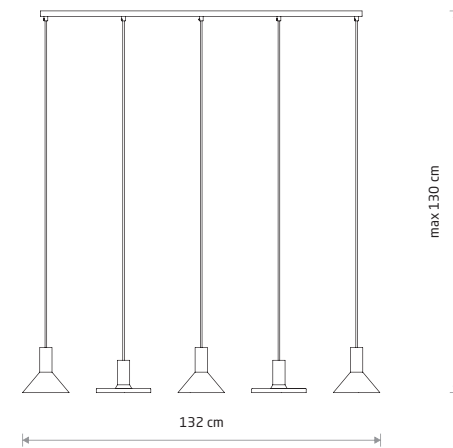

HERMANOS

■ painted steel, solid brass

■ 8032

■ 5xGU10 R50, max 10W only LED

■ painted steel

■ 10906

■ 5xGU10 R50, max 10W only LED




ORBIT 7946

ORBIT 7805



ORBIT 7946

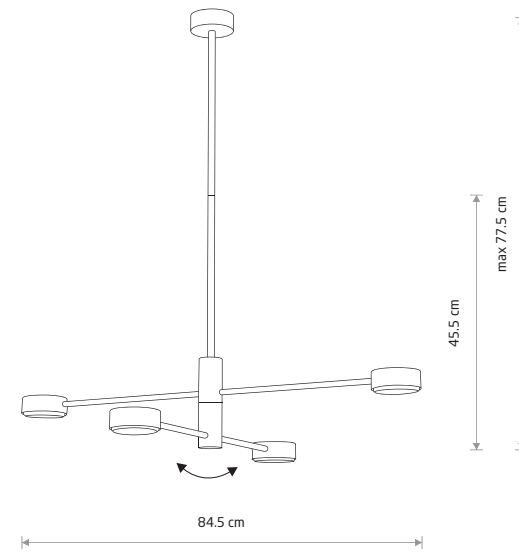


ORBIT

painted steel

7941 7945

4xGX53, max 12W only LED

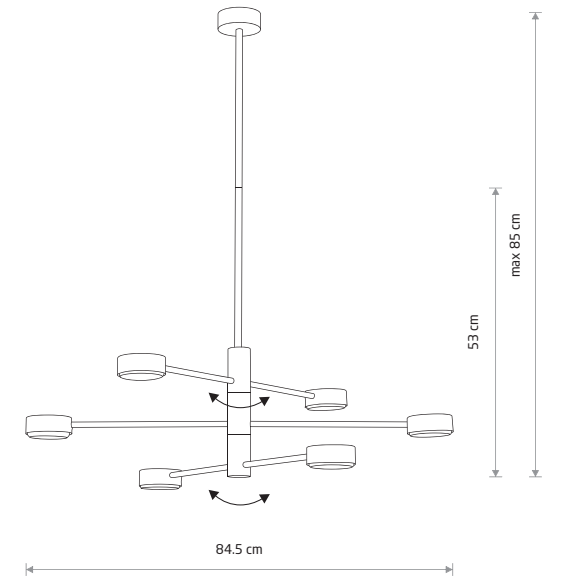


ORBIT

painted steel

7942 7946

6xGX53, max 12W only LED

ORBIT 7938

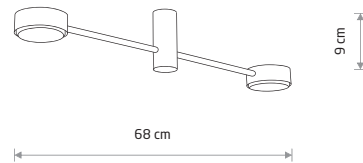

ORBIT

painting steel



7938 7943

2xGX53, max 12W only LED

ORBIT 7805



ORBIT 7806



ORBIT

painting steel

7802 7805



1xGX53, max 12W only LED

ORBIT

painting steel

7803 7806

1xGX53, max 12W only LED



ORBIT

painting steel

7801 7804

2xGX53, max 12W only LED

ORBIT

painting steel

10637 10638


2xGX53, max 12W only LED

ORBIT 10638

ORBIT 10638


ORBIT 7806

ORBIT 7805

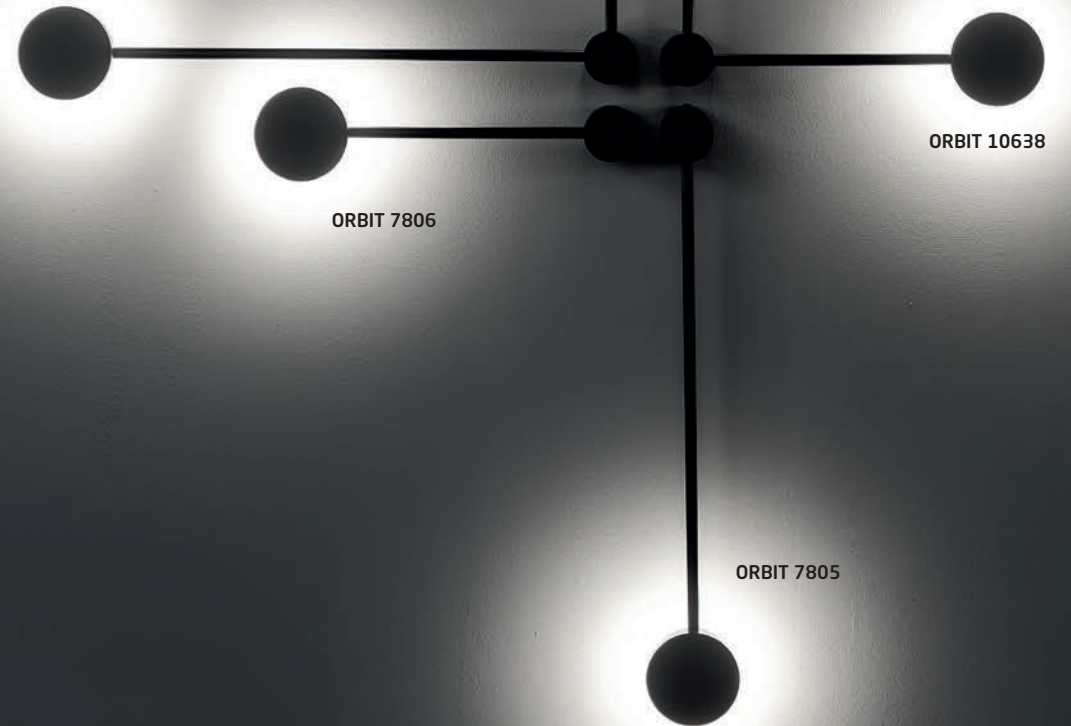



PILLS 8265



PILLS


■ painted aluminum, painted steel

■ 8265

● 1xGX53, max 12W only LED



PILLS 8266

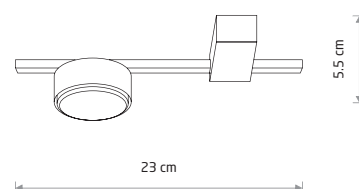

PILLS


■ painted aluminum, painted steel

■ 8266

● 1xGX53, max 12W only LED



PILLS 8264

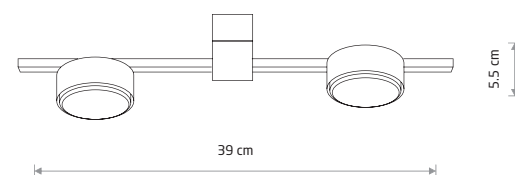


PILLS

■ painted aluminum, painted steel

■ 8270 ■ 8264

● 2xGX53, max 12W only LED

PILLS 8263

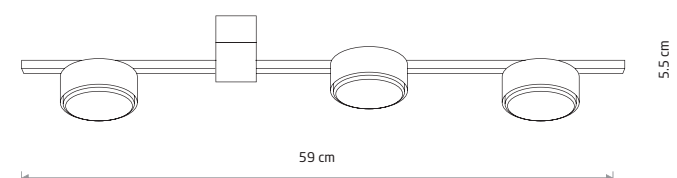


PILLS

■ painted aluminum, painted steel

■ 8268 ■ 8263

● 3xGX53, max 12W only LED

PILLS 8262

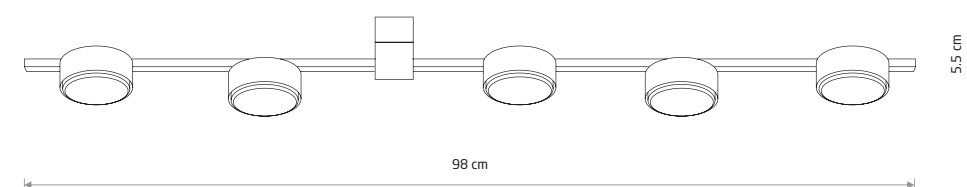

PILLS

■ painted aluminum, painted steel

■ 8267 ■ 8262

● 5xGX53, max 12W only LED




BERGEN 10455

MALMO 10457



HAGA 10456



BERGEN

aluminum


10455

2xGU10 R50, max 10W only LED

painting steel

9706 9707

2xGU10 R50, max 10W only LED



HAGA

aluminum


10456

2xG9, max 10W only LED

painting steel

9708 9710

2xG9, max 10W only LED



MALMO

aluminum

10457

2xGU10 R50, max 10W only LED

painting steel

9705

2xGU10 R50, max 10W only LED




RING MIRROR LED L
10278

RING MIRROR LED M
10277




RING MIRROR LED S 10276




RING MIRROR LED S
glass, painted steel

10276

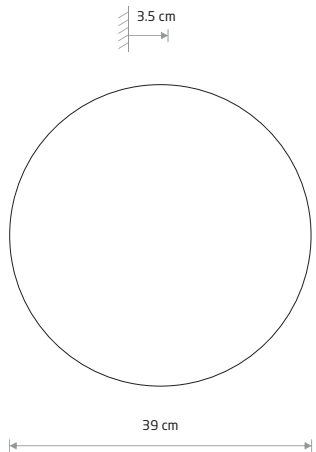

RING MIRROR LED L
glass, painted steel

10278

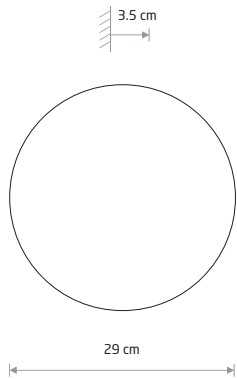

RING MIRROR LED M
glass, painted steel

10277





Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10276	7W LED	3000K	30 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10277	10W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10278	13W LED	3000K	90 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

RING LED S 7634

RING LED S 7637

RING LED S 10317

RING LED S 10315

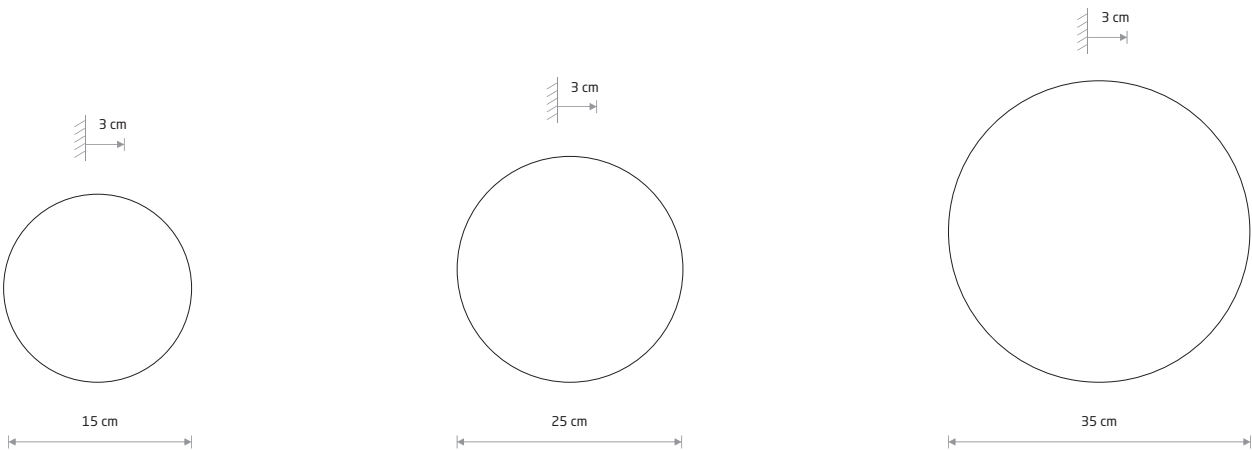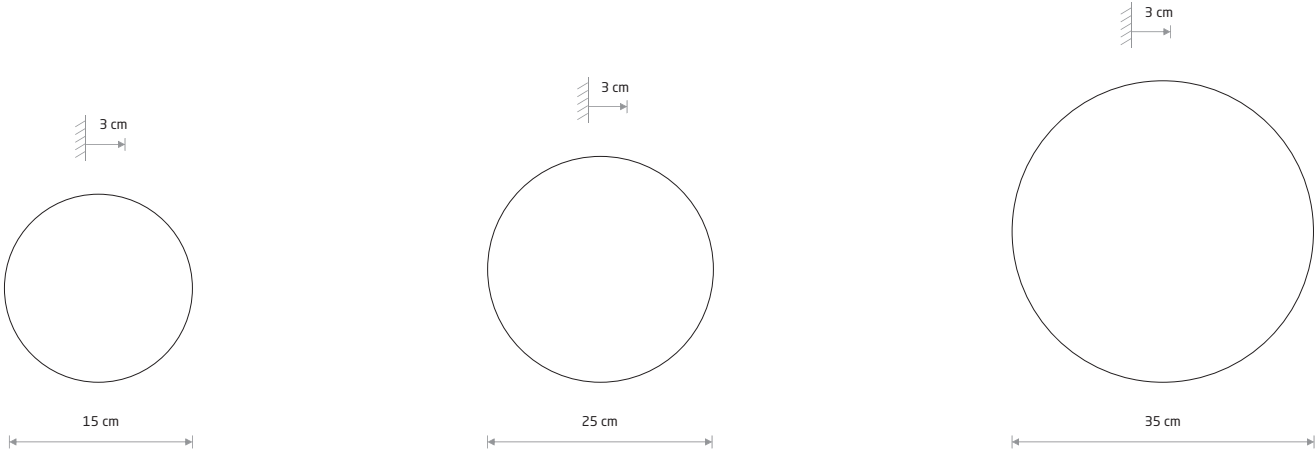

RING LED S
painted steel

7634 7637



RING LED M
painted steel

7635 7638



RING LED L
painted steel

7636 7640



RING LED S
painted steel

10315 10316 10317



RING LED M
painted steel

10352 10347 10350




RING LED L
painted steel

10353 10348 10351




Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
7634	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h
7637	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h
7635	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h
7638	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h
7636	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h
7640	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10315	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10316	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10317	7W LED	3000K	60 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10347	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10350	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10352	10W LED	3000K	130 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10348	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10351	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
10353	13W LED	3000K	160 lm	>90	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

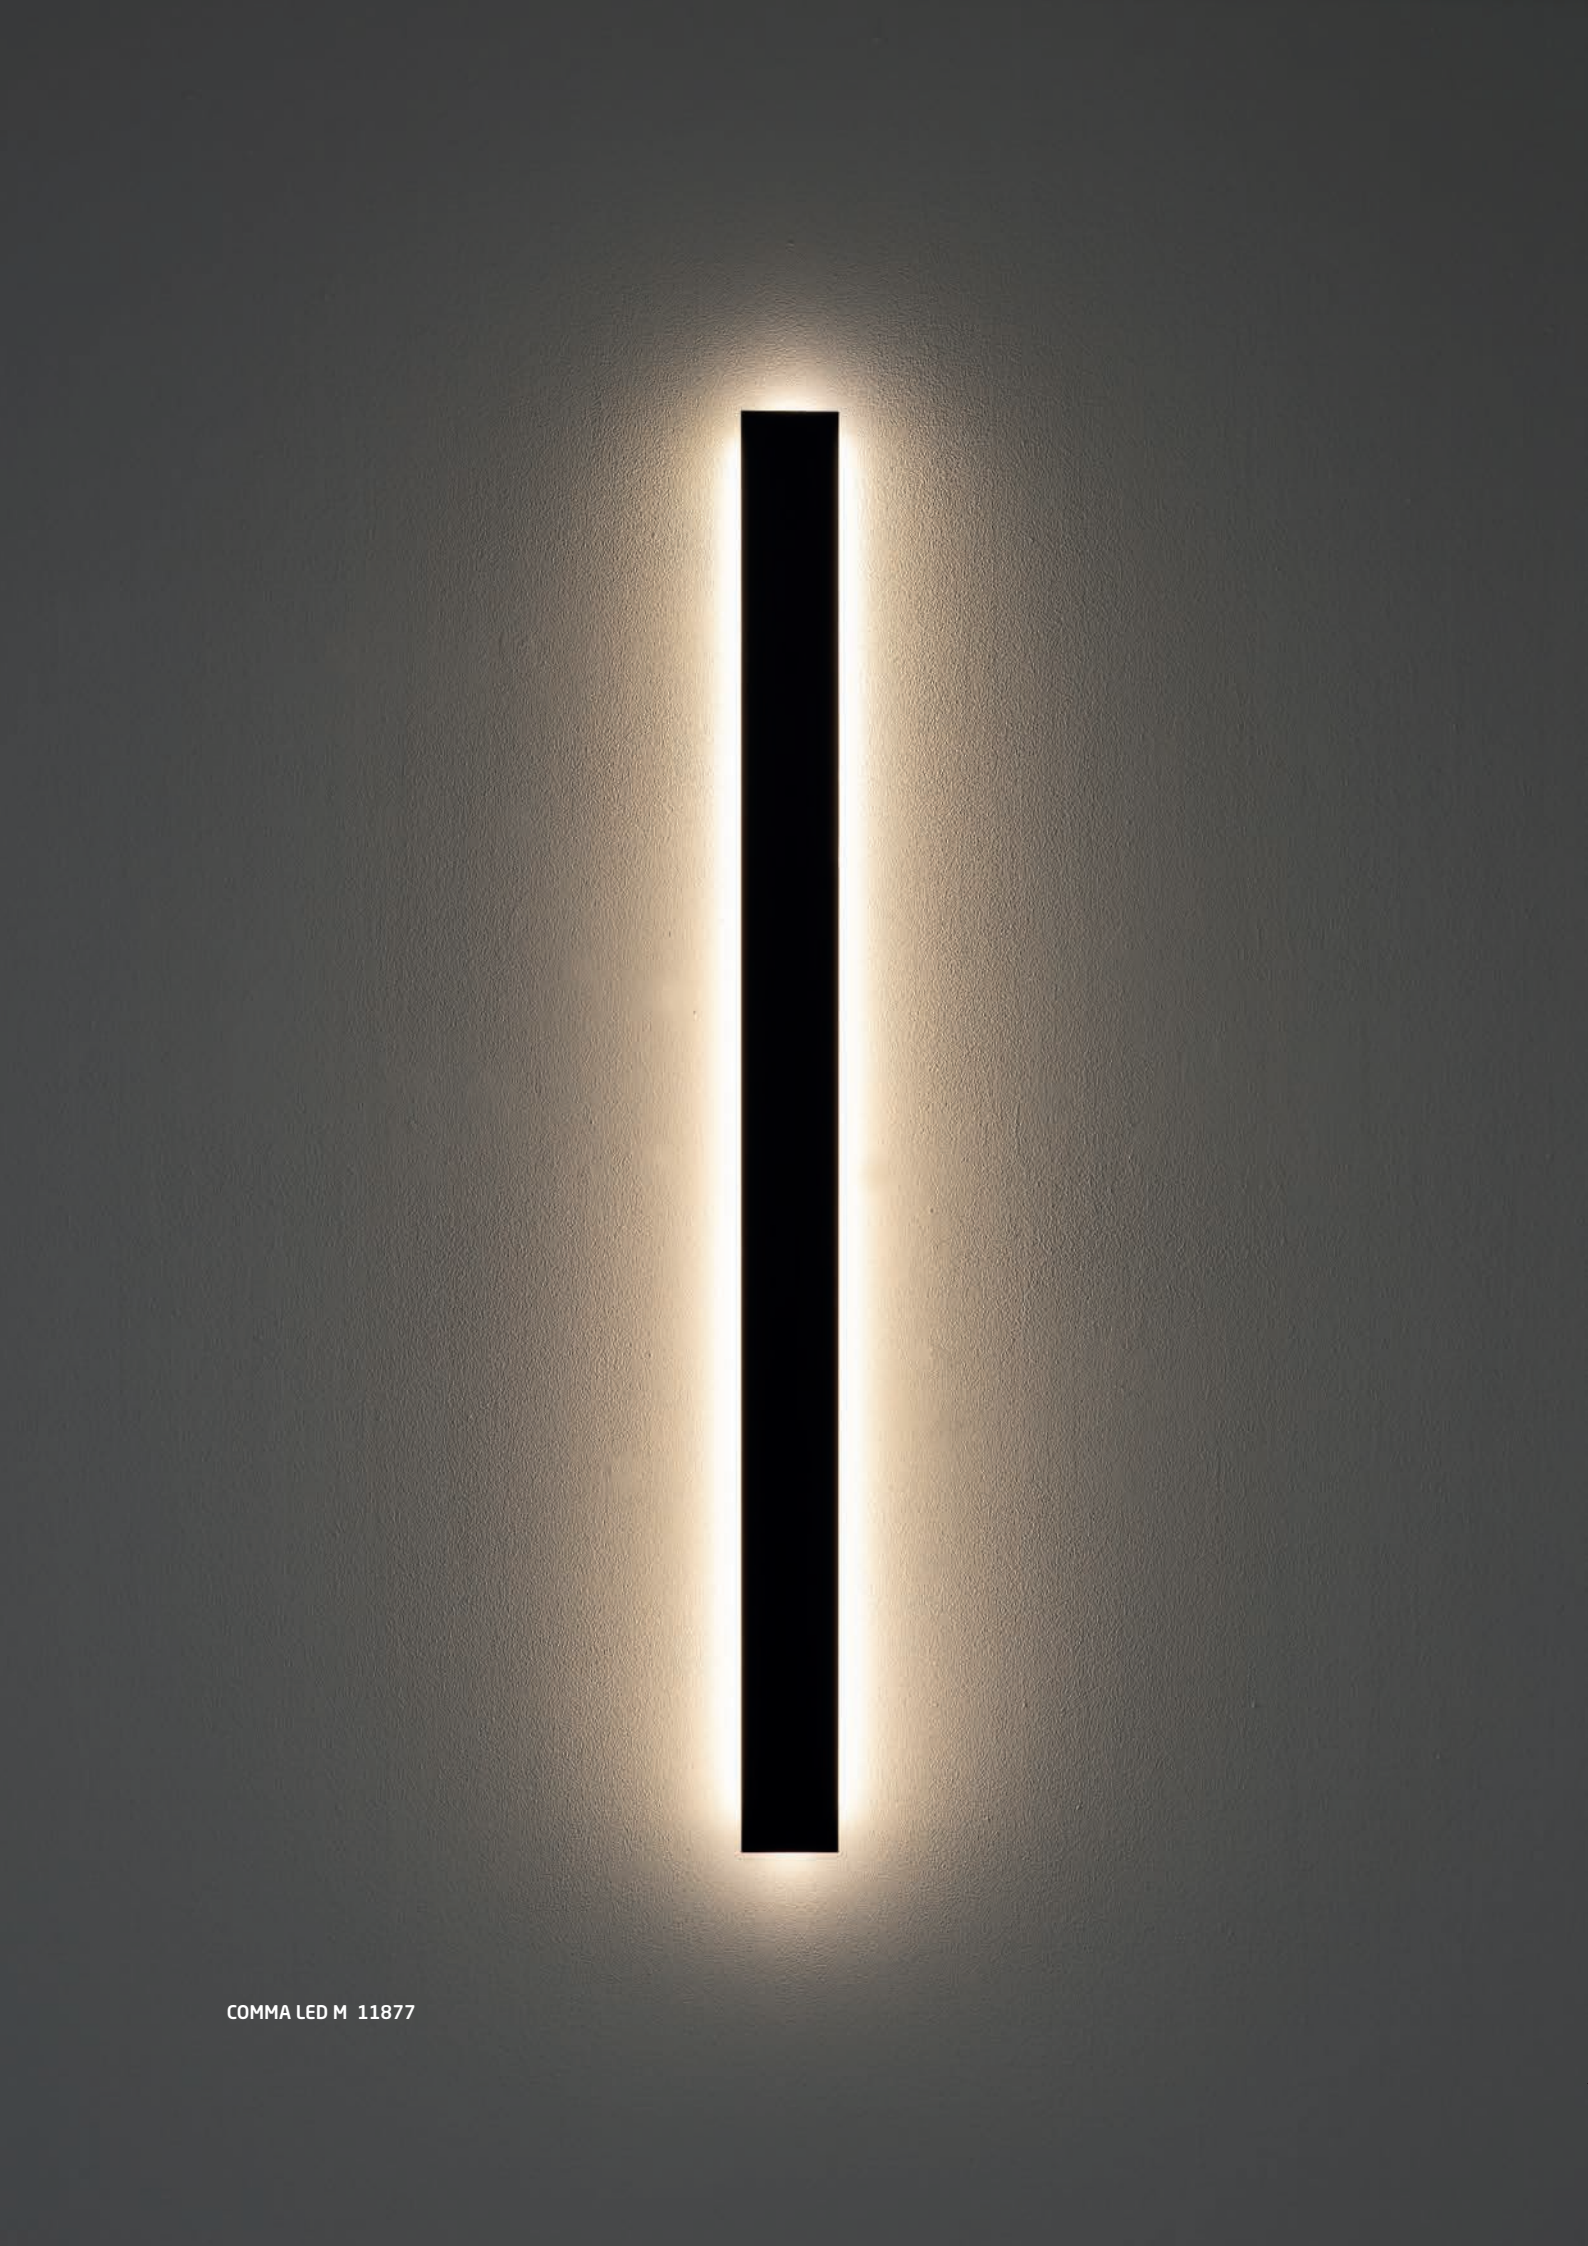


COMMA LED M 11877

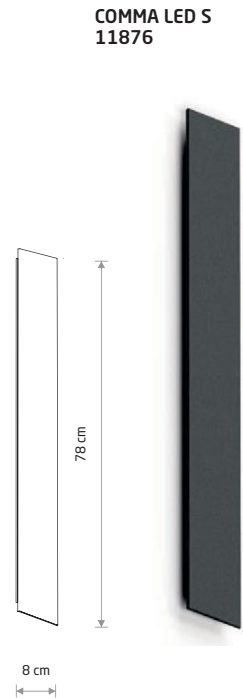

COMMA LED S
painted steel, plastic PC

11876 11884


 

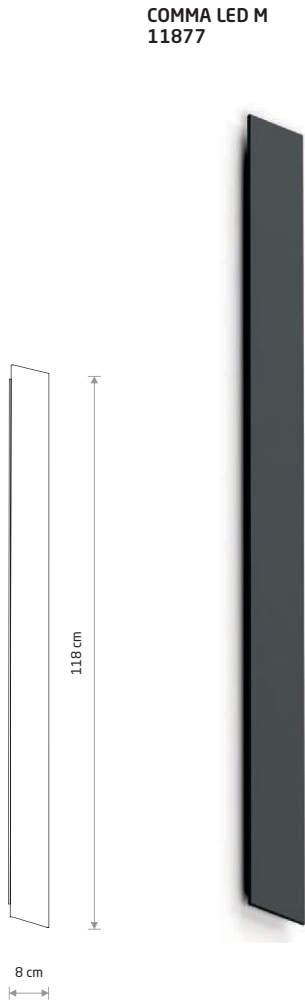

COMMA LED M
painted steel, plastic PC

11877 11883

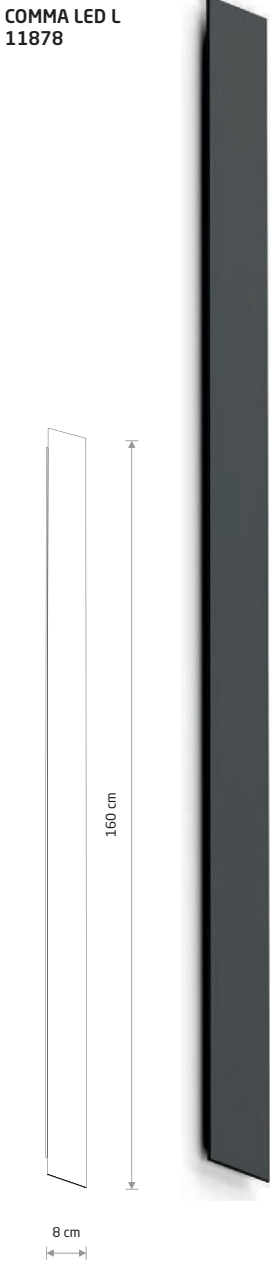

COMMA LED L
painted steel, plastic PC


11878 11882

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11876	19W LED	3000K	500 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11884	19W LED	3000K	850 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11877	25W LED	3000K	650 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11883	25W LED	3000K	1200 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11878	34W LED	3000K	950 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
11882	34W LED	3000K	1650 lm	70 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h




RADIUS 7762

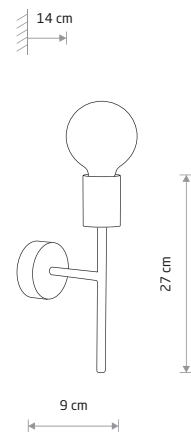

RADIUS
painted steel

■ 7762


■ 1xE27, max 25W only LED

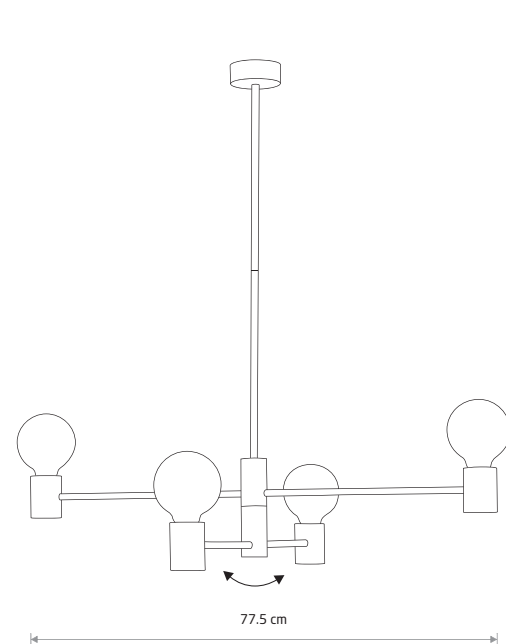

RADIUS
painted steel

■ 7931

■ 4xE27, max 25W only LED

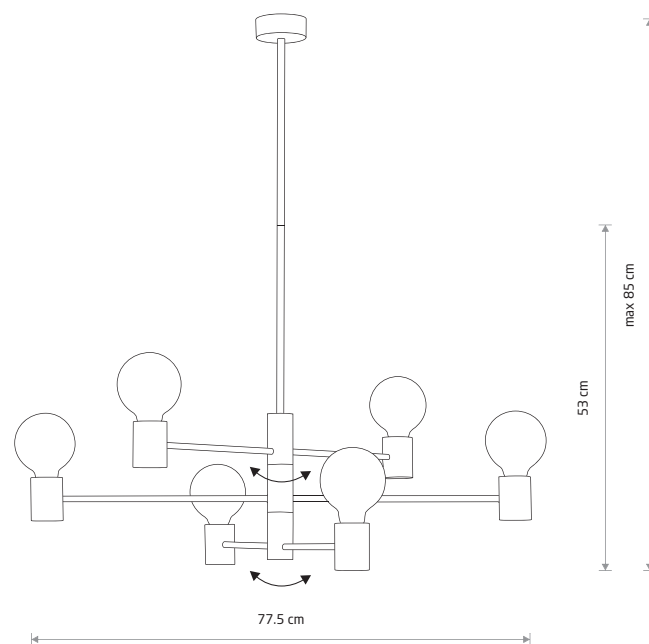

RADIUS
painted steel

■ 7932

■ 6xE27, max 25W only LED




RADIUS 7932



WORKSHOP B 6336



WORKSHOP A 6337

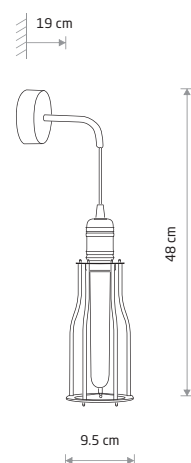


WORKSHOP

painted steel, copper-clad steel

6605

1xE27, max 25W only LED

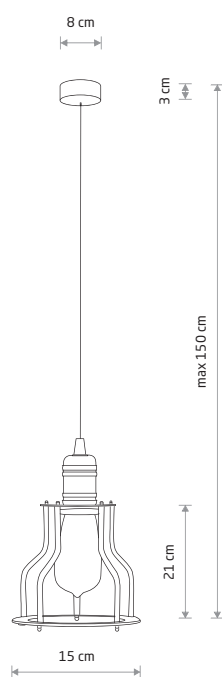


WORKSHOP B

painted steel, copper-clad steel

6336

1xE27, max 25W only LED

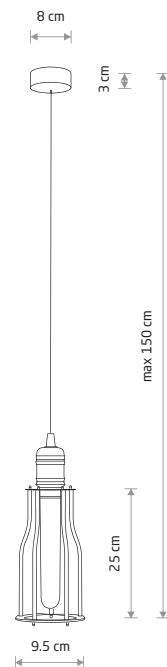


WORKSHOP A

painted steel, copper-clad steel

6337

1xE27, max 25W only LED



SILICONE

silicone, painted steel

6404 6403

1xE27, max 25W only LED




SILICONE 6404



SILICONE 6403



X+Y=max 300 cm




SPIDER
braided cable, painted steel

■ 6792

● 1xE27, max 25W only LED

X+Y=max 300 cm

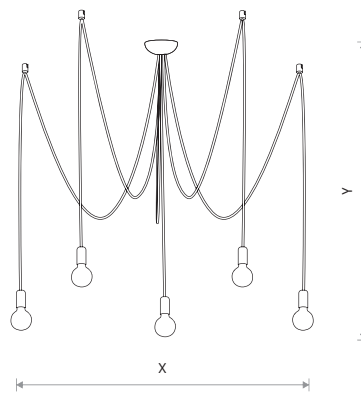


SPIDER
braided cable, painted steel

■ 9744 ■ 6788

● 5xE27, max 25W only LED


X+Y=max 300 cm

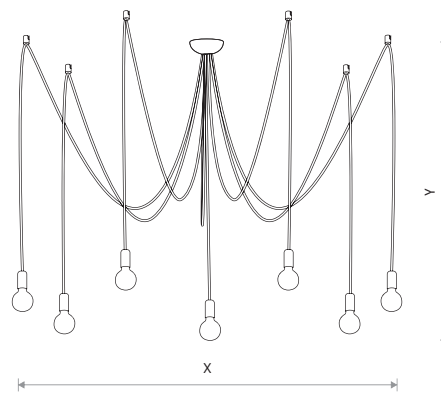

SPIDER
braided cable, painted steel

■ 9743 ■ 6785


● 7xE27, max 25W only LED

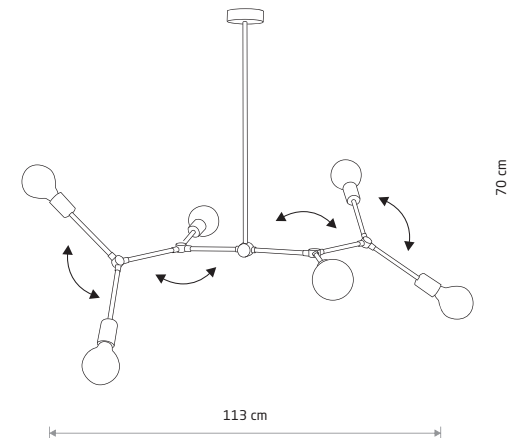

TWIG
painted steel

■ 9138

● 6xE27, max 25W only LED

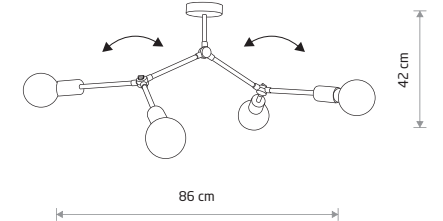

TWIG
painted steel

■ 9140

● 4xE27, max 25W only LED




CRATE 9046



CRATE 9045




CRATE 9047

CRATE
painted steel


■ 9046

● 1xE27, max 25W only LED

CRATE
painted steel

■ 9045

● 1xE27, max 25W only LED

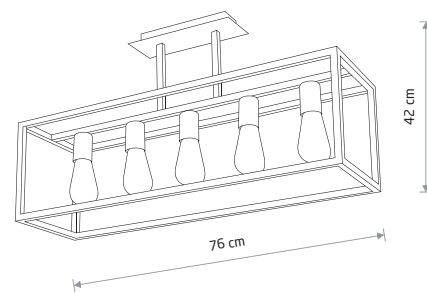CRATE
painted steel

■ 9047


● 5xE27, max 25W only LED



PLANT 9381




PLANT 9382

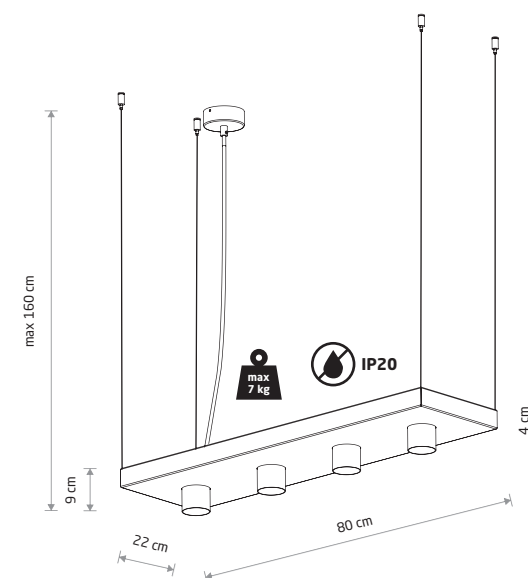PLANT
painted steel, steel

■ 9382 ■ 9381

● 4xGU10 R50, max 10W only LED

TECHNO 9145

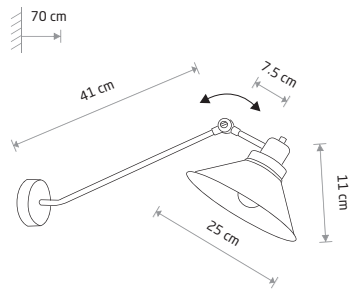


TECHNO
painted steel

9145

1xE27, max 25W only LED

TECHNO 9142

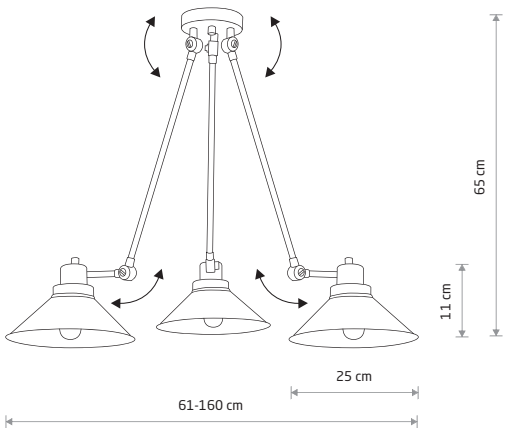


TECHNO
painted steel

9142

3xE27, max 25W only LED

HARMONY 9890

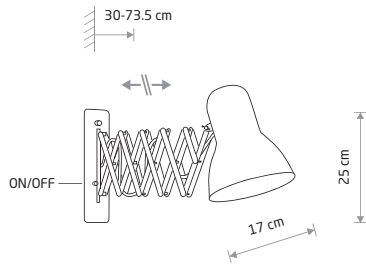





HARMONY
painted steel, chrome

9890

1xE27, max 25W only LED



PANTOGRAPH 9126

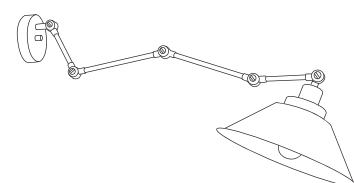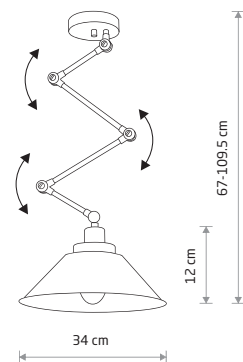

PANTOGRAPH
painted steel

9126

1xE27, max 25W only LED




PANTOGRAPH 9126



CRAFT 9150




CRAFT 9151



CRAFT
painted steel

9151

1xE27, max 25W only LED

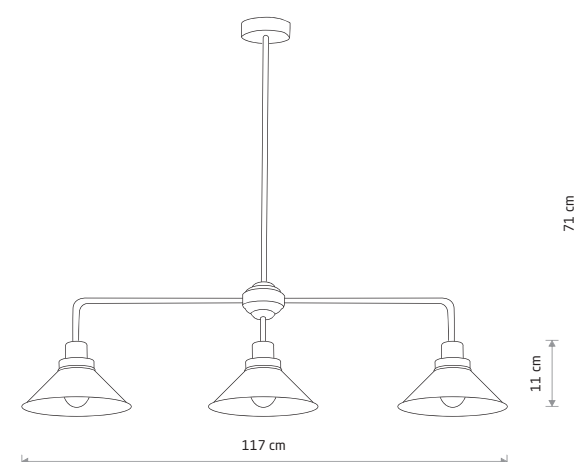


CRAFT
painted steel

9150

3xE27, max 25W only LED



HIGH-BAY 5067

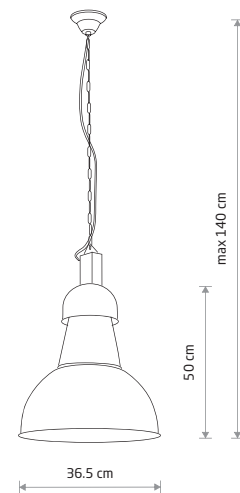

HIGH-BAY


■ painted steel

■ 5067

■ 1xE27, max 25W only LED



GARRET 6442



GARRET


■ painted steel

■ 6442

■ 1xE27, max 25W only LED



GARRET M 6444

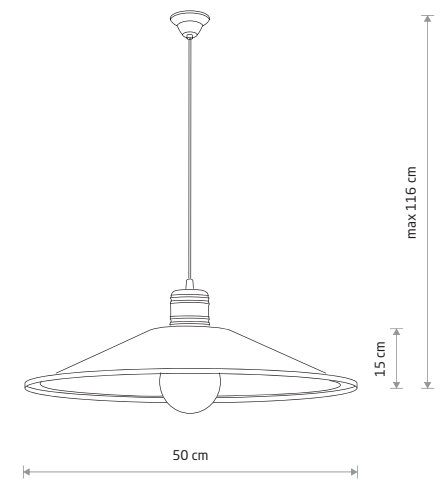

GARRET M


■ painted steel

■ 6444

■ 1xE27, max 25W only LED




HEMISPHERE RUST L
6368

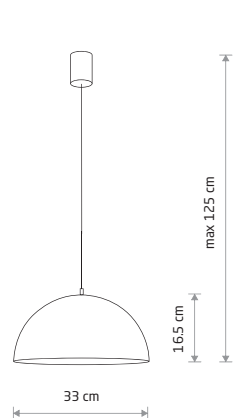

HEMISPHERE RUST S
painted steel

6367

1xE27, max 25W only LED

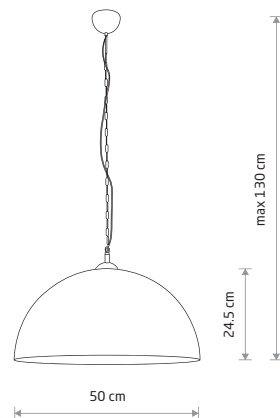


HEMISPHERE RUST L
painted steel

6368

1xE27, max 25W only LED




HEMISPHERE SUPER S
10618

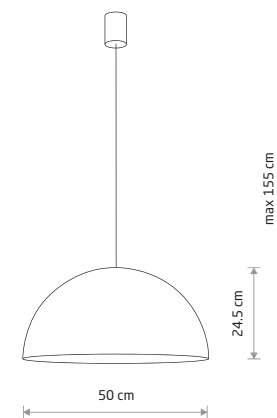

HEMISPHERE SUPER L
painted steel, braided cable

10296

4xGX53, max 12W only LED

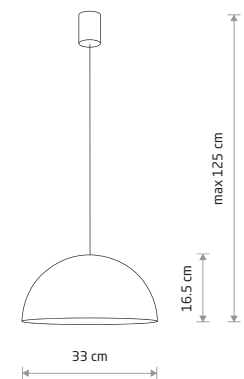


HEMISPHERE SUPER S
painted steel, braided cable

10618

1xGX53, max 12W only LED




HEMISPHERE HIT L 10703

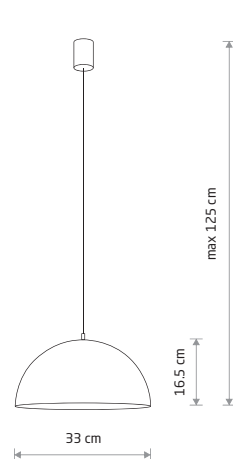

HEMISPHERE HIT S
painted steel

10702

1xE27, max 25W only LED

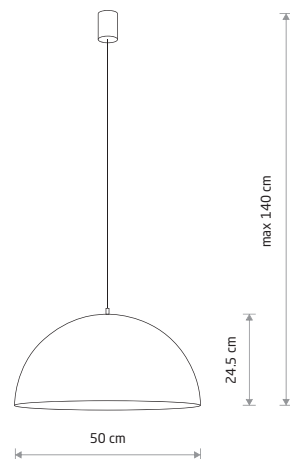


HEMISPHERE HIT L
painted steel

10703

1xE27, max 25W only LED




HEMISPHERE SUPER S
10701

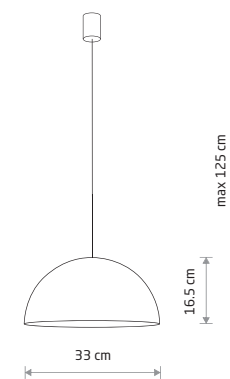

HEMISPHERE SUPER S
painted steel, braided cable

10695 10701

1xGX53, max 12W only LED

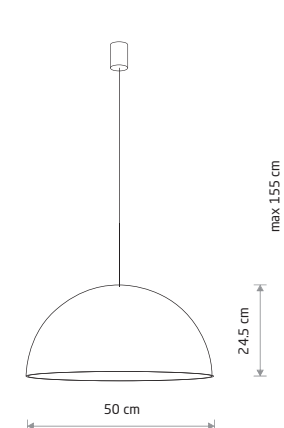


HEMISPHERE SUPER L
painted steel, braided cable

10696 10700

4xGX53, max 12W only LED



CANOE 7927

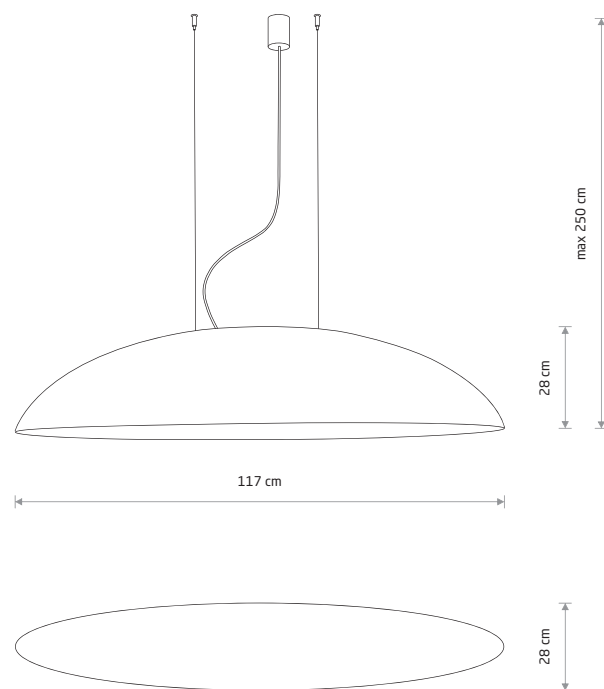

CANOE


composite, painted steel, steel

7926 7927

5xE27, max 25W only LED



EGG L 9023

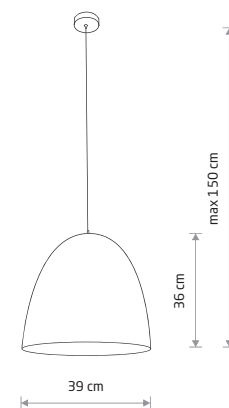

EGG M


composite, painted steel

9022 9021

1xE27, max 25W only LED



EGG XL 9026

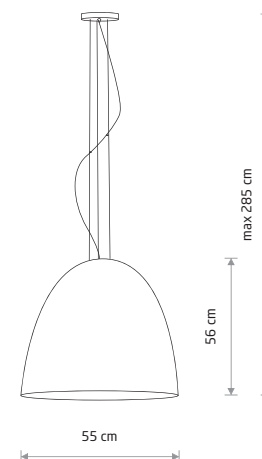


EGG L

composite, painted steel, steel

9024 9023

5xE27, max 25W only LED

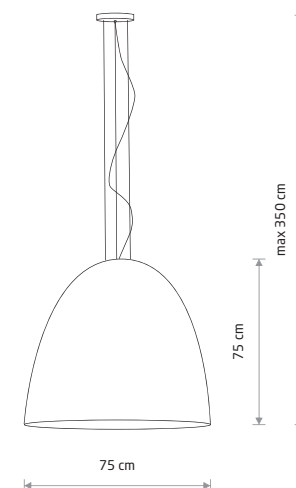

EGG XL


composite, painted steel, steel

9026 9025

7xE27, max 25W only LED



ARES 206




ARES

painted steel

203

2xE14, max 10W only LED

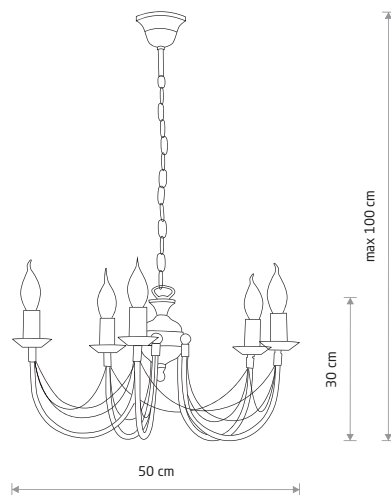


ARES

painted steel

205

5xE14, max 10W only LED

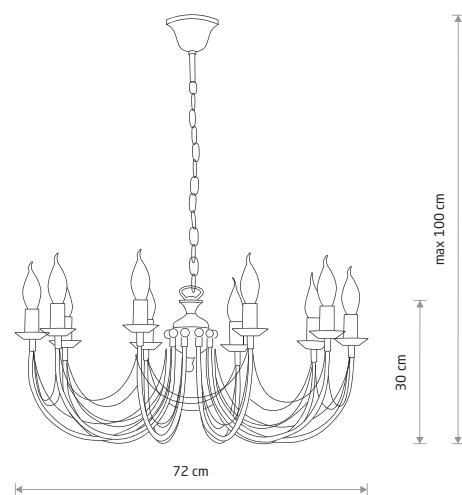

ARES

painted steel


206

10xE14, max 10W only LED

BLACK WITH A GOLDEN PATINA




GIOTTO LED M 8170

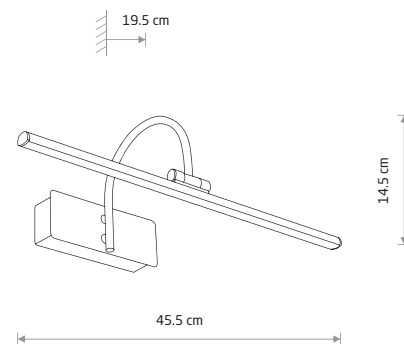

GIOTTO LED S

brass plated steel

8168

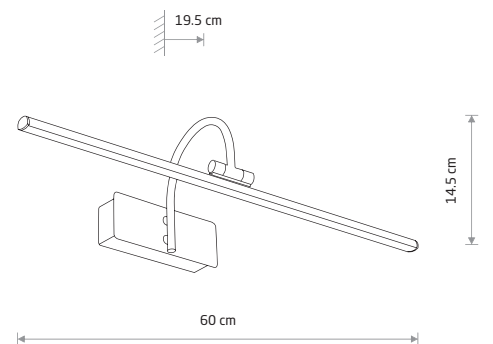

GIOTTO LED M

brass plated steel

8170



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8168	9W LED	3000K	600 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
8170	13W LED	3000K	900 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h

ANTIQUE BRASS



ORGANIC 8304





ORGANIC 8305



ORGANIC 8302



ORGANIC 8303

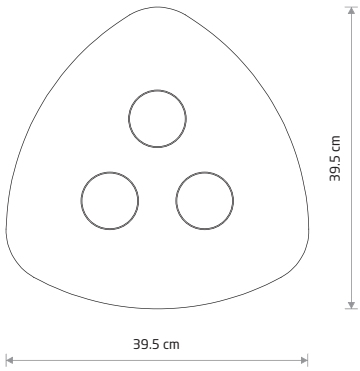


ORGANIC

painted steel

8304 8302

3xGX53, max 12W




ORGANIC

painted steel

8305 8303

1xGX53, max 12W



IRIS LED


painted aluminum, plastic

8993 8994

2xGU10



IRIS LED 8993



LIA LED


painted aluminum

6913

1xGU10



LIA LED 6913



TUBE

painted aluminum

9317 9320

2xGU10 ES111, max 15W only LED



TUBE 9317

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8993	7W LED	3000K	550 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
8994	7W LED	3000K	530 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
6913	7W LED	3000K	460 lm	89 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	10000h




STRAIGHT CEILING LED L 7551



STRAIGHT CEILING LED M 7558



STRAIGHT CEILING LED S 7597



STRAIGHT CEILING LED L


painted steel, plastic PMMA

7551

7556

7600

1xLED TUBE T8, max 22W, included



STRAIGHT CEILING LED M


painted steel, plastic PMMA

7553

7558

7598

1xLED TUBE T8, max 16W, included



STRAIGHT CEILING LED S

painted steel, plastic PMMA

7552

7557

7597

1xLED TUBE T8, max 11W, included




STRAIGHT WALL LED M 7561



STRAIGHT WALL LED S 7568



STRAIGHT WALL XS 7601



STRAIGHT WALL XS


painted steel, plastic PMMA

6345

6350

7601

1xE14, max 10W only LED



STRAIGHT WALL LED S


painted steel, plastic PMMA

7568

7562

7596

1xLED TUBE T8, max 11W, included

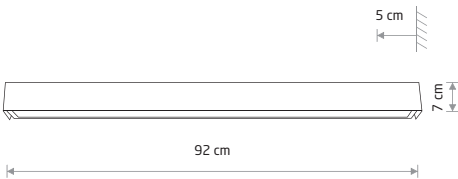

STRAIGHT WALL LED M


painted steel, plastic PMMA

7567

7561

7594

1xLED TUBE T8, max 16W, included

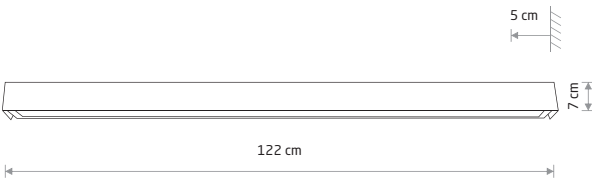

STRAIGHT WALL LED L

painted steel, plastic PMMA

7566

7560

7595

1xLED TUBE T8, max 22W, included

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime	Material
LED TUBE T8	60 cm	11W LED	3000K	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	120 cm	22W LED	3000K	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS

Name	Size	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime	Material
LED TUBE T8	60 cm	11W LED	3000K	1700 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	90 cm	16W LED	3000K	2300 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS
LED TUBE T8	120 cm	22W LED	3000K	3200 lm	120°	≥80	~220-230 V, 50/60 Hz	≥0,5	30000h	CLEAR GLASS

GRAPHITE P010 RAL 7016

WHITE P004 RAL 9003


BLACK P013 RAL 9005

WHITE P004 RAL 9003

GRAPHITE P010 RAL 7016

BLACK P013 RAL 9005

SOFT CEILING LED 60X6 7527



SOFT CEILING LED 60X6

painting aluminum, plastic PMMA

7540 7527

1xLED TUBE T8, max 11W, included

SOFT CEILING LED 60X20 7526



SOFT CEILING LED 60X20

painting aluminum, plastic PMMA

7538 7526

2xLED TUBE T8, max 11W, included

SOFT CEILING LED 90X6 7533



SOFT CEILING LED 90X6

painting aluminum, plastic PMMA

7546 7533

1xLED TUBE T8, max 16W, included

SOFT CEILING LED 90X20 7531



SOFT CEILING LED 90X20

painting aluminum, plastic PMMA

7542 7531

2xLED TUBE T8, max 16W, included

SOFT CEILING LED 120X6 7524





SOFT CEILING LED 120X6

painting aluminum, plastic PMMA

7536 7524

1xLED TUBE T8, max 22W, included

SOFT CEILING LED 60X60 7530

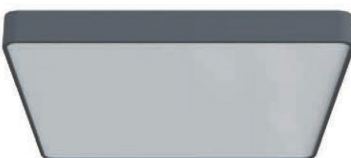


SOFT CEILING LED 60X60

painting aluminum, plastic PMMA

7544 7530

5xLED TUBE T8, max 11W, included

ION LED M 8171

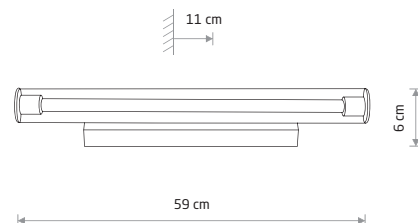


ION LED M

glass, chrome plated steel

8171



ION LED L 8172

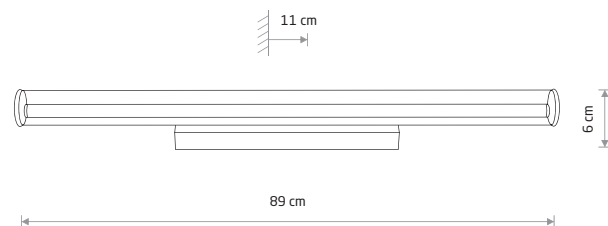

ION LED L

glass, chrome plated steel

8172



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8171	12W LED	3000K	870 lm	130 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h
8172	18W LED	3000K	1300 lm	130 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	30000h



CL OFFICE LED PRO 120
10212







CL OFFICE LED PRO 120

painting aluminum, plastic PMMA

10208 3000K 10210 4000K


10212 4000K

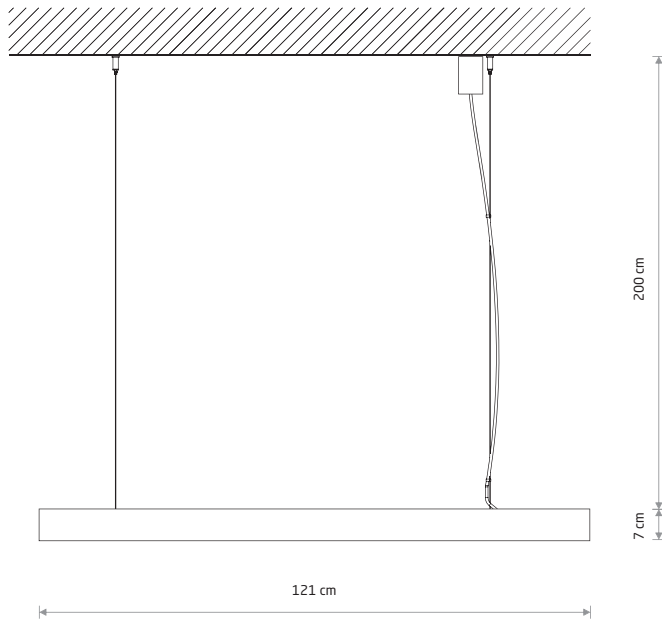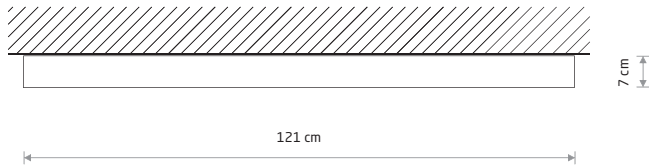

CL OFFICE PRO/HALL
PRO SUSPENSION KIT

steel, painted steel

8291 8250



CL OFFICE PRO/HALL
PRO POWER SUPPLY KIT

painted steel

8290 8288







CL OFFICE LED PRO 150
10213



CL OFFICE LED PRO 150

chrome plated aluminum, plastic PMMA


10213 3000K 10214 4000K

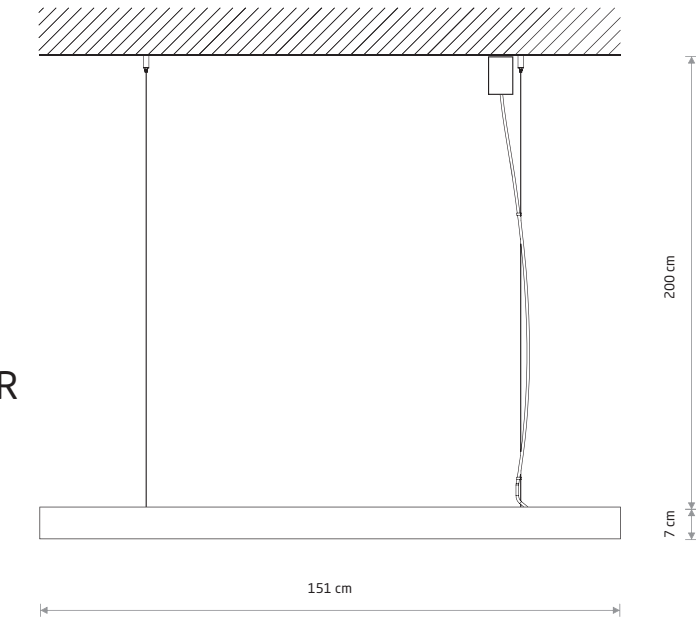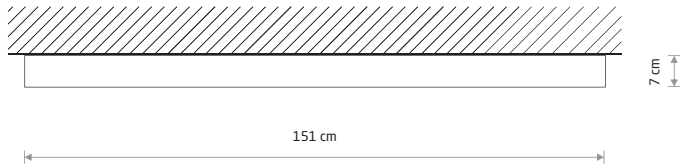

CL OFFICE PRO/HALL
PRO SUSPENSION KIT

steel, painted steel

8250



CL OFFICE PRO/HALL
PRO POWER SUPPLY KIT

painted steel


8288

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	LED brand	Driver brand	Ingress protection	Lifetime	Warranty
10212	31W LED	4000K	4160 lm	90 °	≥ 80	~220-230 V, 50/60 Hz	PHILIPS	PHILIPS	IP20	50000h	5 YEARS
10208	31W LED	3000K	3490 lm	90 °	≥ 80	~220-230 V, 50/60 Hz	PHILIPS	PHILIPS	IP20	50000h	5 YEARS
10210	31W LED	4000K	3610 lm	90 °	≥ 80	~220-230 V, 50/60 Hz	PHILIPS	PHILIPS	IP20	50000h	5 YEARS

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	LED brand	Driver brand	Ingress protection	Lifetime	Warranty
10213	40W LED	3000K	4540 lm	83 °	≥ 80	~220-230 V, 50/60 Hz	PHILIPS	PHILIPS	IP20	50000h	5 YEARS
10214	40W LED	4000K	4710 lm	83 °	≥ 80	~220-230 V, 50/60 Hz	PHILIPS	PHILIPS	IP20	50000h	5 YEARS



Sposoby montażu / Installation methods

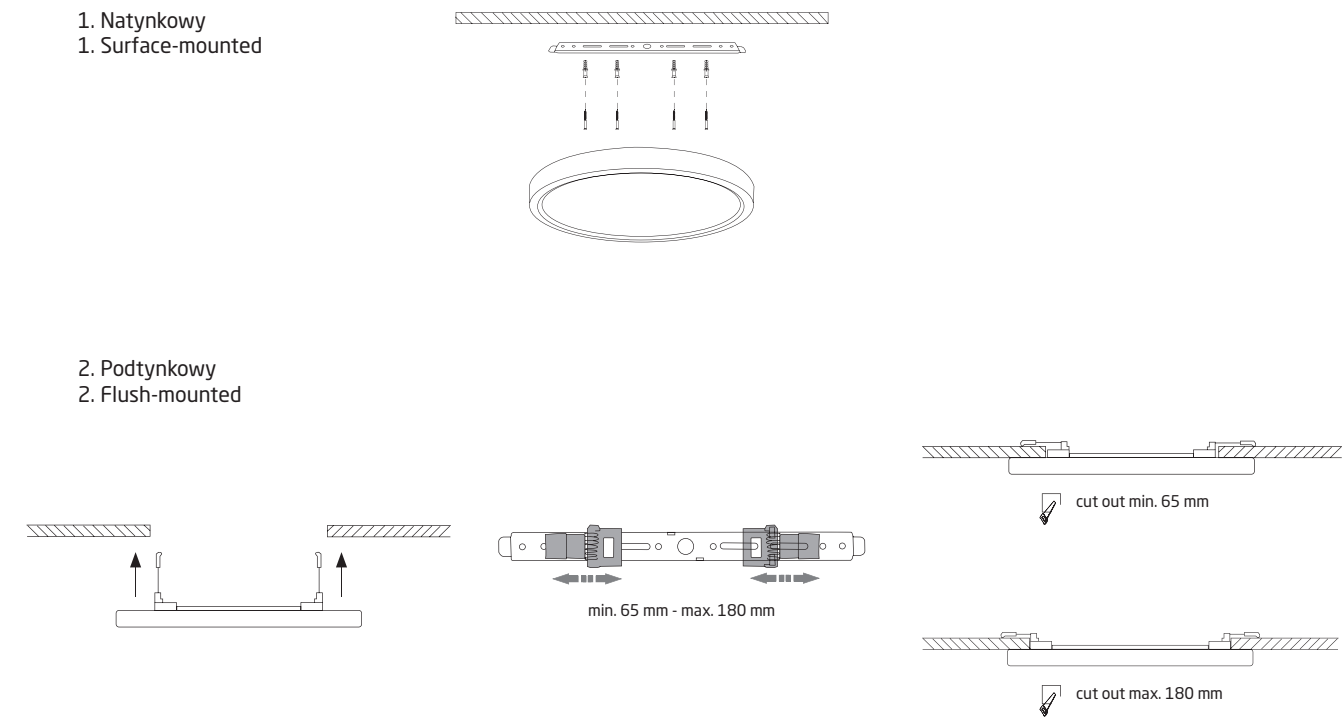

Możliwość zmiany mocy oprawy oświetleniowej (W)
Selectable luminaire wattage (W)




11358 - 18W

11358 - 24W

11358 - 30W

Możliwość zmiany temperatury barwowej (K)
Selectable colour temperature (K)

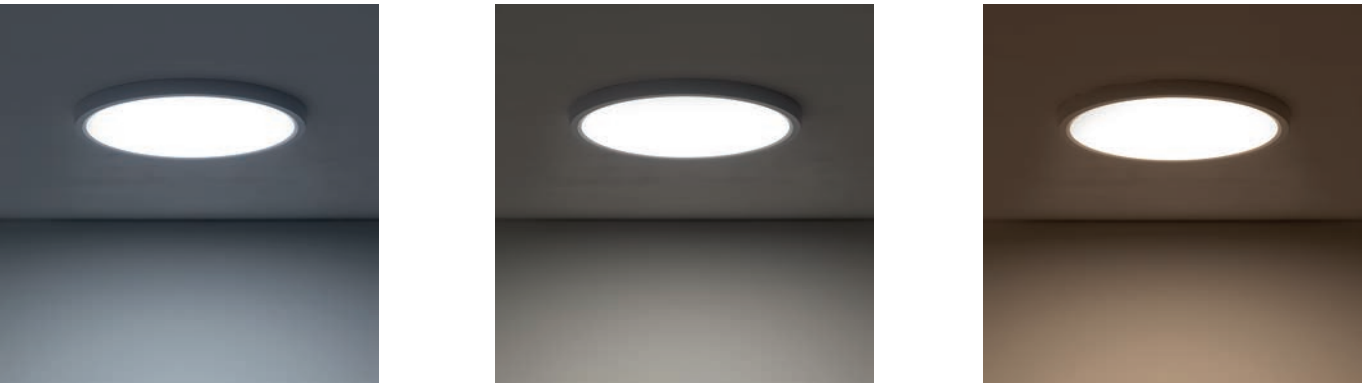


11358 - 6000K


11358 - 4000K

11358 - 3000K

Możliwość wyboru temperatury barwowej (K) oraz mocy (W)
Selectable colour temperature (K) and wattage (W)

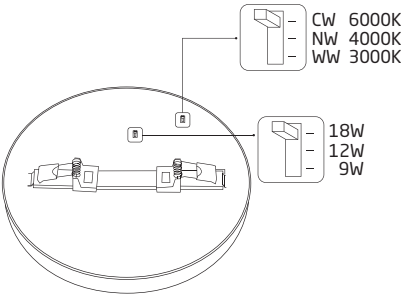


Możliwość wyboru temperatury barwowej (K) oraz mocy (W)
Selectable colour temperature (K) and wattage (W)

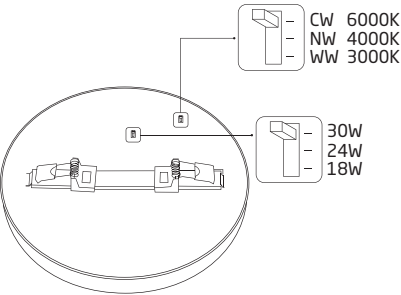

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11357	9W/12W/18W LED	CCT CHANGE 3000-6000K	900/1200/1600 lm	110°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
11358	18W/24W/30W LED	CCT CHANGE 3000-6000K	1800/2400/2900 lm	110°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h



NIKKI ROUND LED 48W
11207




NIKKI ROUND LED 32W

painted steel, plastic PMMA

- 11200 3000K

11203 4000K
- 11206 3000K
- 11210 4000K




NIKKI ROUND LED 48W

painted steel, plastic PMMA

- 11201 3000K

11204 4000K
- 11207 3000K
- 11211 4000K

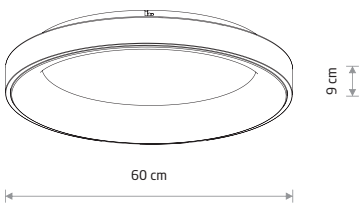

NIKKI ROUND LED 60W

painted steel, plastic PMMA

- 11202 3000K

11205 4000K
- 11208 3000K
- 11212 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
11200	32W LED	3000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11201	48W LED	3000K	4200 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11202	60W LED	3000K	5400 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11203	32W LED	4000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11204	48W LED	4000K	4300 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11205	60W LED	4000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11206	32W LED	3000K	2600 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11207	48W LED	3000K	4000 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11208	60W LED	3000K	5200 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11210	32W LED	4000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11211	48W LED	4000K	4200 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h
11212	60W LED	4000K	5400 lm	120 °	>80	~220-230 V, 50/60 Hz		IP20	40000h

WHITE


BLACK



NIKKI ROUND LED 60W 11202




LID ROUND LED 10408



LID ROUND LED 15W

plastic


- 10402 3000K
- 10411 4000K
- 10406 3000K
- 10415 4000K



LID ROUND LED 35W

plastic


- 10404 3000K
- 10413 4000K
- 10408 3000K
- 10417 4000K



LID ROUND LED 25W

plastic

- 10403 3000K
- 10412 4000K
- 10407 3000K
- 10416 4000K

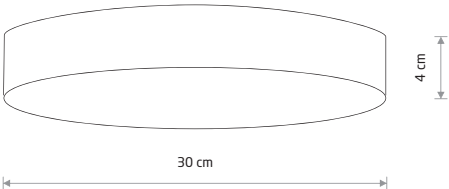


LID ROUND LED 50W

plastic

- 10410 3000K
- 10418 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10402	15W LED	3000K	1500 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10411	15W LED	4000K	1600 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10406	15W LED	3000K	1200 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10415	15W LED	4000K	1300 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10403	25W LED	3000K	1900 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10412	25W LED	4000K	2100 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10407	25W LED	3000K	1600 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10416	25W LED	4000K	1800 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10404	35W LED	3000K	3100 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10413	35W LED	4000K	3400 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10408	35W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10417	35W LED	4000K	3000 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10410	50W LED	3000K	4300 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10418	50W LED	4000K	4500 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h

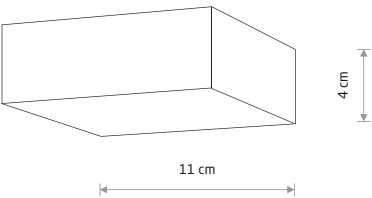


LID SQUARE LED 15W

plastic

10420 3000K 10428 4000K

10424 3000K

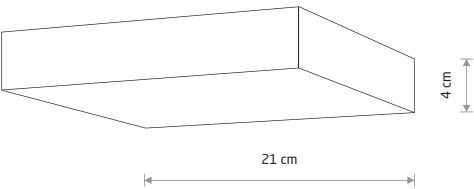


LID SQUARE LED 35W

plastic

10422 3000K 10431 4000K


10426 3000K

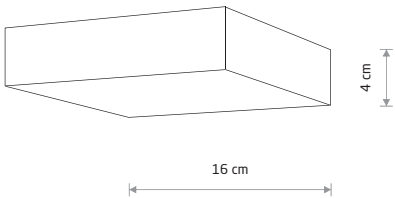

LID SQUARE LED 25W

plastic

10421 3000K 10430 4000K

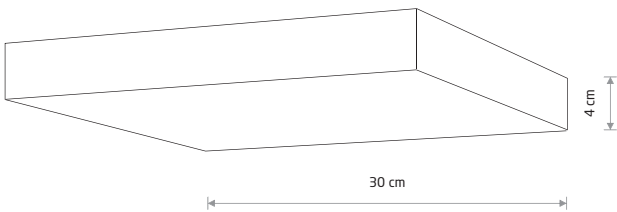

LID SQUARE LED 50W

plastic

10423 3000K 10432 4000K

10427 3000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10420	15W LED	3000K	1500 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10428	15W LED	4000K	1600 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10424	15W LED	3000K	1200 lm	120°	>80	~220-230 V, 50/60 Hz		>0.7	IP20	30000h
10421	25W LED	3000K	1900 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10430	25W LED	4000K	2100 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10422	35W LED	3000K	3100 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10431	35W LED	4000K	3400 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10426	35W LED	3000K	2700 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10423	50W LED	3000K	4600 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10432	50W LED	4000K	5000 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10427	50W LED	3000K	4300 lm	120°	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h



LID SQUARE LED 10421

ARENA LED 10176




ARENA LED
painted steel, plastic PMMA
10185 10176




KASAI 9490




KASAI 7952

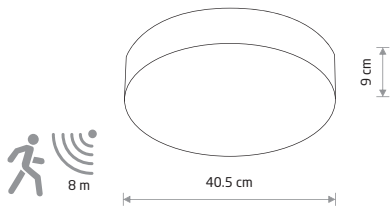

ARENA SENSOR
painted steel, plastic PMMA
10186 10177
3xE14, max 10W only LED



ARENA
painted steel, plastic PMMA
10184 10175
3xE14, max 10W only LED

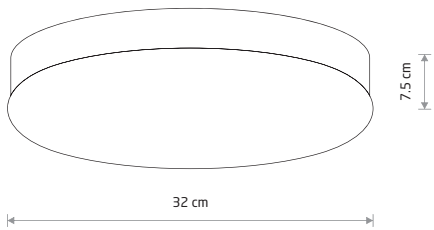

KASAI
chrome plated steel, glass
9490
2xE27, max 10W only LED
brushed stainless steel, glass
9491
2xE27, max 10W only LED
painted steel, glass
7952
2xE27, max 10W only LED

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10185	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⚡	>0.5	IP20	50000h
10176	20W LED	4000K	2200 lm	100°	≥ 80	~220-230 V, 50/60 Hz	⚡	>0.5	IP20	50000h



SMART LED 8358




SMART LED 8358



- Możliwość wyboru temperatury barwowej światła w przedziałach 3000K - 6000K
- Włącznik dotykowy z funkcją ściemniania
- Port USB umożliwiające ładowanie telefonu


- Possibility to choose the colour temperature of light in the range from 3000K to 6000K
- Touch switch with dimming function
- USB port for charging mobile phones

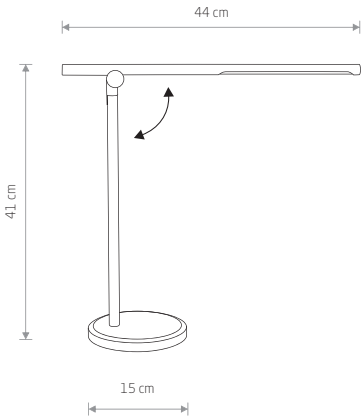

SMART LED
painted aluminum, plastic ABS
■ 8358
●

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8358	8W LED	CCT CHANGE 3000-6000K	400 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	■	>0.5	IP20	25000h


■ BLACK

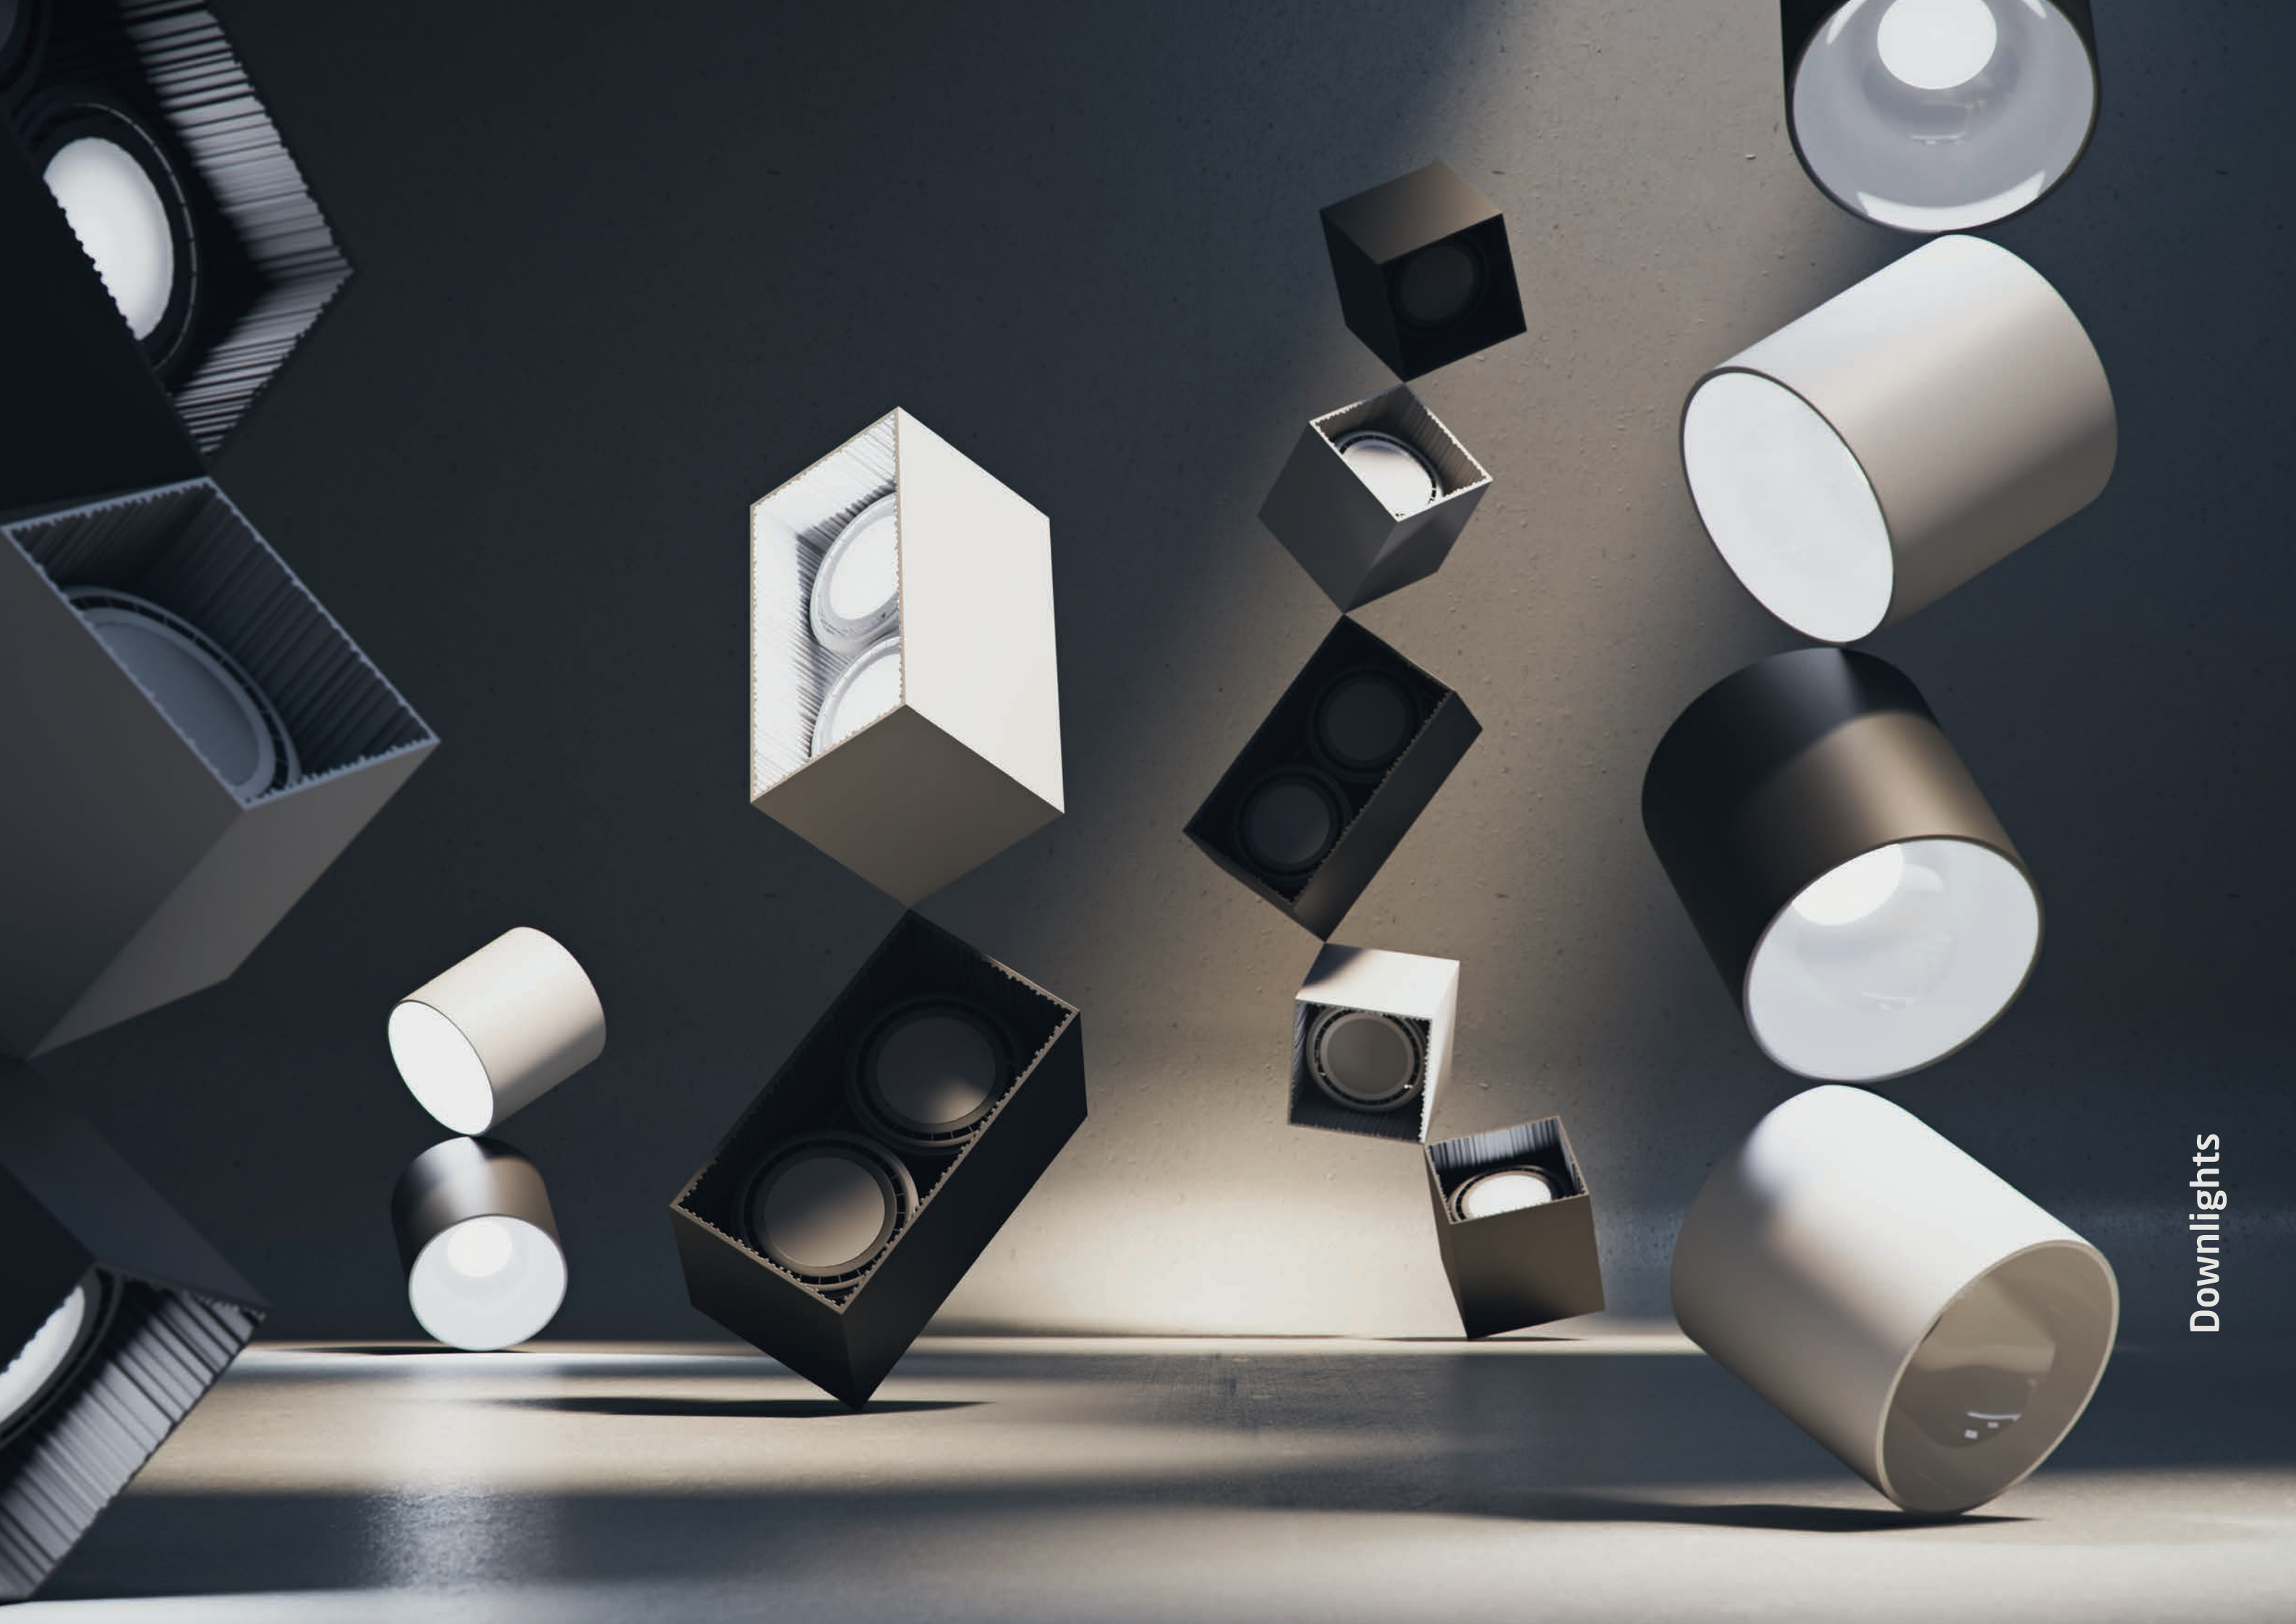

Downlights

COBBLE 7791

COBBLE 7790



COBBLE


painted aluminum

7791
 7790

1xGU10 ES111, max 15 only LED

GROOVE 7793

GROOVE 7792



GROOVE


painted aluminum

7793
 7792

1xGU10 ES111, max 15W only LED

GAP 9385

GAP 9384




GAP

painted aluminum

9385
 9384

2xGU10 R50, max 10W only LED

PAG 9387



PAG


painted aluminum

9387

2xGU10, max 10W only LED

GROOVE 9383

GROOVE 9316



GROOVE


painted aluminum

9383
 9316

2xGU10 ES111, max 15W only LED

OVAL 9241

OVAL 9240



OVAL


painted aluminum

9241
 9240

2xGU10 ES111, max 15W only LED



MIDI LED 10048

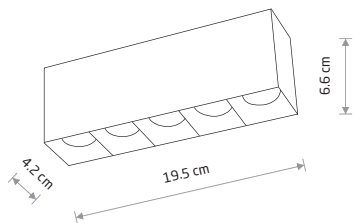

MIDI LED

painted aluminum

- 10048 3000K


10052 4000K
- 10055 3000K
- 10058 4000K



MIDI LED 10051



MIDI LED 10054

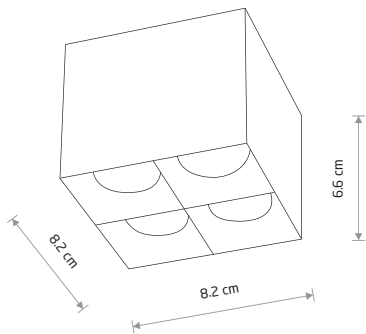

MIDI LED

painted aluminum


- 10054 3000K
- 10057 4000K

10047 3000K

10051 4000K



MIDI LED 10060

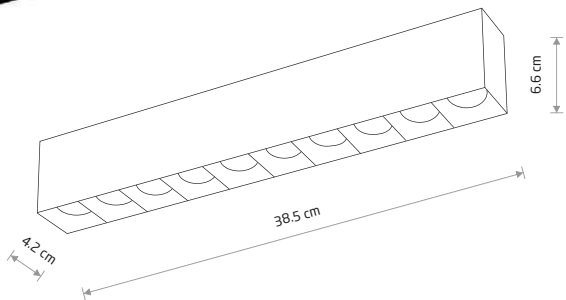

MIDI LED

painted aluminum

- 10050 3000K
- 10053 4000K

10056 3000K

10060 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10048	20W LED	3000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10052	20W LED	4000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10055	20W LED	3000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10050	40W LED	3000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10053	40W LED	4000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10056	40W LED	3000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10058	20W LED	4000K	1700 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10060	40W LED	4000K	3500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10047	16W LED	3000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10051	16W LED	4000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10054	16W LED	3000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10057	16W LED	4000K	1500 lm	36 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h



MIDI LED RECESSED
10064



MIDI LED RECESSED

■ painted aluminum

■ 10064 4000K





✓ cut out 85×85 mm

MIDI LED RECESSED
10062



MIDI LED RECESSED
10063

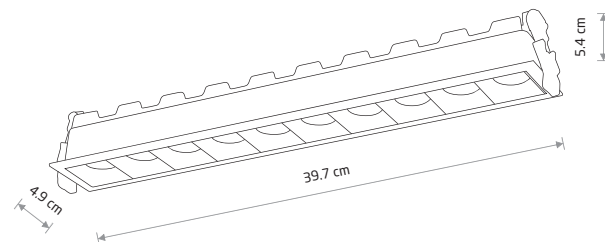

MIDI LED RECESSED

■ painted aluminum

■ 10062 3000K ■ 10065 4000K



✓ cut out 200×45 mm

MIDI LED RECESSED

■ painted aluminum

■ 10063 3000K



✓ cut out 390×45 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10064	16W LED	4000K	1400 lm	36 °	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10062	20W LED	3000K	1800 lm	36 °	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10065	20W LED	4000K	1800 lm	36 °	>90	~220-230 V, 50/60 Hz	☐	>0.5	IP20	30000h
10063	40W LED	3000K	3300 lm	36 °	>90	~220-230 V, 50/60 Hz	☐	>0.9	IP20	30000h


■ BLACK

MIDI LED RECESSED
10063





MINI LED RECESSED
10043



MINI LED RECESSED
painted aluminum


10042 3000K 10043 4000K



cut out 140×35 mm



MINI LED RECESSED
10045

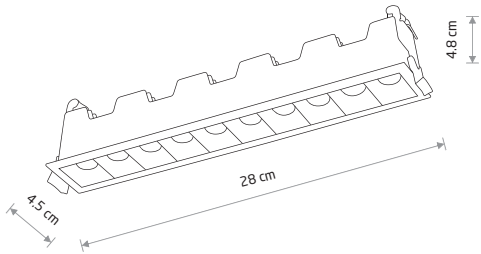

MINI LED RECESSED
painted aluminum

10045 3000K 10046 4000K



cut out 275×35 mm


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10042	10W LED	3000K	600 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10043	10W LED	4000K	660 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
10045	20W LED	3000K	1220 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10046	20W LED	4000K	1280 lm	30 °	>90	~220-230 V, 50/60 Hz		>0.9	IP20	30000h



FOCUS MINI LED
10067



FOCUS MINI LED
10071



FOCUS MINI LED

■ painted aluminum

- 10067 3000K
- 10070 4000K
- 10068 3000K
- 10071 4000K



FOCUS MINI LED 10071

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10067	10W LED	3000K	600 lm	36 °	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h
10070	10W LED	4000K	600 lm	36 °	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h
10068	10W LED	3000K	600 lm	36 °	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h
10071	10W LED	4000K	600 lm	36 °	>90	~220-230 V, 50/60 Hz	□	>0.9	IP20	30000h

CL IOS LED 20W, ANGLE 60
8742




CL IOS LED 20W, ANGLE 36
zinc aluminum alloy

8740 3000K 8738 4000K




CL IOS LED 20W, ANGLE 60
zinc aluminum alloy

8742 3000K 8741 4000K
8743 4000K



CL IOS LED 30W, ANGLE 36
8731



CL IOS LED 30W, ANGLE 36
zinc aluminum alloy

8731 3000K 8727 4000K




CL IOS LED 30W, ANGLE 60
zinc aluminum alloy

8732 4000K



CL IOS LED 40W, ANGLE 60
8724

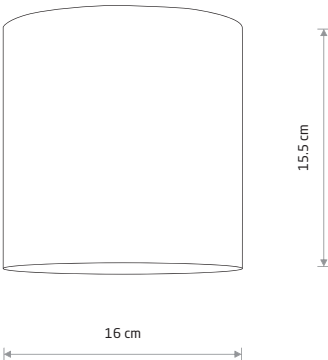

CL IOS LED 40W, ANGLE 60
zinc aluminum alloy

8724 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8740	20W LED	3000K	1600 lm	36 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8738	20W LED	4000K	1600 lm	36 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8743	20W LED	4000K	1600 lm	60 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8742	20W LED	3000K	1600 lm	60 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8741	20W LED	4000K	1600 lm	60 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8731	30W LED	3000K	2700 lm	36 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8727	30W LED	4000K	2700 lm	36 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8732	30W LED	4000K	2700 lm	60 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years
8724	40W LED	3000K	3200 lm	60 °	≥ 90	IP20	Brightlux	Osram	50000h	5 years



HALO 8196



POINT TONE 8222



INDIA 7858



FLEA 8202



HALO 8195







POINT TONE 8225



INDIA 7860



FLEA 8203



HALO

painting steel, plastic ABS

8195 8196

1xGU10 R50, max 10W only LED

POINT TONE

plastic ABS

8222 8221 8225

8224 8223

1xGU10 R50, max 10W only LED

INDIA

painting aluminum

7858 7860

1xGU10 R50, max 15W only LED

FLEA


painting steel

8202 8203

1xGX53, max 12W only LED



SET 8895



SET


painting steel

8895 8900

1xGU10 R50, max 10W only LED



SET 8901



SET


painting steel

8901 8896

1xGU10 R50, max 10W only LED



SET 8898



SET

painting steel

8898


1xGU10 R50, max 10W only LED



EYE TONE 8932



EYE TONE 8928



EYE TONE

painting steel, plastic ABS

8932 8928


1xGU10 R50, max 10W only LED



EYE TONE 8931



EYE TONE 8926



EYE TONE

painting steel, plastic ABS

8931 8926


1xGU10 R50, max 10W only LED



EYE TONE 8930



EYE TONE 8925



EYE TONE


painting steel, plastic ABS

8930 8925

1xGU10 R50, max 10W only LED



EYE TONE 8087



EYE TONE

painted steel, plastic ABS


8086
 8087

8088
 7665

2xGU10 R50, max 10W only LED



EYE TONE 8092



EYE TONE

painted steel, plastic ABS


8091
 8092

8093
 7666

3xGU10 R50, max 10W only LED



POINT PLEXI L 6528



POINT PLEXI L


painted steel, plastic PMMA

6528
 6530

1xE27, max 20W



POINT PLEXI M 6526



POINT PLEXI M


painted steel, plastic PMMA

6525
 6526

1xGU10 R50, max 10W only LED



BIT S 9486



BIT S



painted steel

9482
 9486

1xGU10 ES111, max 15W only LED



POINT S 7603



POINT S


painted steel

7603
 6000

1xGU10 R50, max 10W only LED



SILBA 10476



SILBA


painting aluminum

10476 10477

1xGX53, max 12W only LED



CRES 10478



CRES


painting aluminum

10478 10480

1xGX53, max 12W only LED



MURTER 10490



MURTER

painting aluminum


10490 10489

1xGX53, max 12W only LED

cut out ø 65 mm



MJET 10494



MJET

painting aluminum

10494 10493

1xGU10 R50, max 10W only LED

cut out ø 67 mm


VIS

painting aluminum

10486 10485

1xGX53, max 12W only LED

cut out ø 65 mm



VIS 10485


HVAR

painting aluminum

10488 10487

1xGX53, max 12W only LED

cut out ø 65 mm



HVAR 10487


SOLTA

painting aluminum

10492 10491

1xGU10 R50, max 10W only LED

cut out ø 67 mm



SOLTA 10491


SHINE

aluminum

11350 11348

1xGU10 R50, max 15W only LED


cut out ø 68 mm



SHINE 11348



UNO S 10841



UNO S

painting steel


10840 10841

1xGX53, max 15 W only LED

cut out ø 83 mm



UNO M 10843



UNO M

painting steel


10842 10843

1xGX53, max 15 W only LED

cut out ø 102 mm



UNO L 10845



UNO L

painting steel


10844 10845

1xGX53, max 15 W only LED

cut out ø 127 mm



CUP 10789

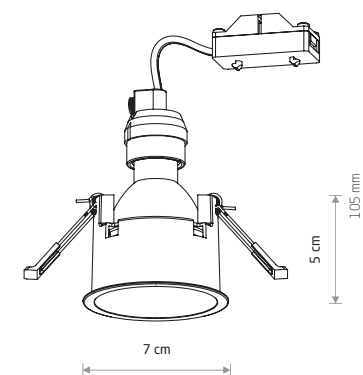

CUP

plastic ABS

10788 10789 10790

10791 10792

1xGU10 R50, max 10W only LED

cut out ø 64 mm



CUP 10789



CUP 10794

CUP 3 PC SET

plastic ABS


10793 10794

3xGU10 R50, max 10W only LED

cut out ø 64 mm



MYKONOS LED 18W
10542




MYKONOS LED 10W

plastic

- 10537 3000K 10538 4000K



cut out 125 mm




MYKONOS LED 18W

plastic

- 10542 3000K 10543 4000K



cut out 175 mm




MYKONOS LED 6W

plastic

- 10535 3000K 10536 4000K



cut out 100 mm




MYKONOS LED 15W

plastic

- 10540 3000K 10541 4000K



cut out 150 mm

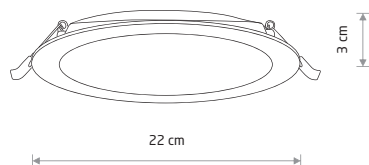


MYKONOS LED 24W

plastic

- 10544 3000K 10545 4000K



cut out 200 mm



EGINA LED 5W


plastic

- 10546 3000K 10547 4000K

- 10548 3000K 10550 4000K



cut out 75 mm



EGINA LED 10W


plastic

- 10551 3000K 10552 4000K

- 10553 3000K 10554 4000K



cut out 100 mm



EGINA LED 15W

plastic

- 10555 3000K 10556 4000K


- 10557 3000K 10558 4000K



cut out 125 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10535	6W LED	3000K	360 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10536	6W LED	4000K	390 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10537	10W LED	3000K	900 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10538	10W LED	4000K	950 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10540	15W LED	3000K	1450 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10541	15W LED	4000K	1500 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10542	18W LED	3000K	1700 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10543	18W LED	4000K	1800 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10544	24W LED	3000K	2400 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10545	24W LED	4000K	2500 lm	110°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10546	5W LED	3000K	350 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10547	5W LED	4000K	370 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10548	5W LED	3000K	330 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10550	5W LED	4000K	350 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10551	10W LED	3000K	700 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10552	10W LED	4000K	750 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10553	10W LED	3000K	650 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10554	10W LED	4000K	700 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10555	15W LED	3000K	1100 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10556	15W LED	4000K	1200 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10557	15W LED	3000K	1000 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h
10558	15W LED	4000K	1100 lm	30°	>80	~220-230 V, 50/60 Hz	□	>0.5	IP20	30000h




CL KOS LED 8W

plastic

8782 3000K 8781 4000K



cut out ø 100 mm




CL KOS LED 10W

plastic

8780 3000K 8778 4000K



cut out ø 125 mm

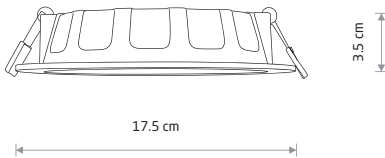


CL KOS LED 16W

plastic

8777 3000K 8776 4000K



cut out ø 150 mm

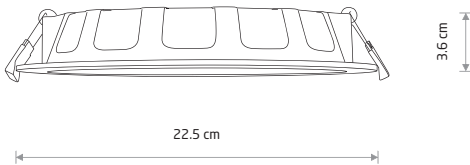

CL KOS LED 24W

plastic

8775 3000K 8774 4000K




cut out ø 200 mm

CL KOS LED 16W 8777



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8782	8W LED	3000K	650 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8781	8W LED	4000K	670 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8780	10W LED	3000K	1000 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8778	10W LED	4000K	1100 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8777	16W LED	3000K	1500 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8776	16W LED	4000K	1600 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8775	24W LED	3000K	2300 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years
8774	24W LED	4000K	2600 lm	100 °	≥ 80	IP44/20	Sanan	Driver on board	50000h	5 years


CL DIA LED 18W
8722

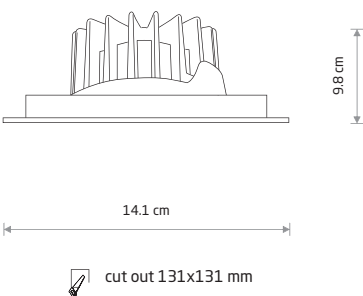

CL DIA LED 18W

zinc aluminum alloy


8722 3000K

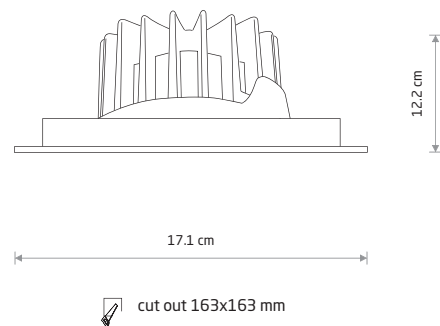


CL DIA LED 30W

zinc aluminum alloy

8720 3000K

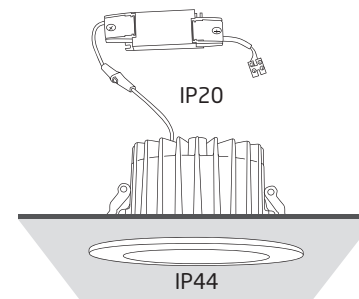


CL KEA LED 40W
8767

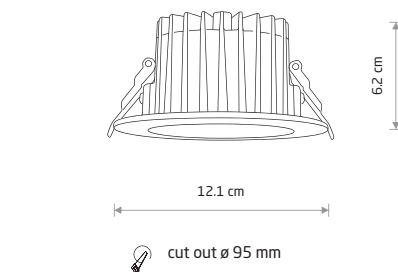

CL KEA LED 20W

plastic

8773 3000K 8772 4000K

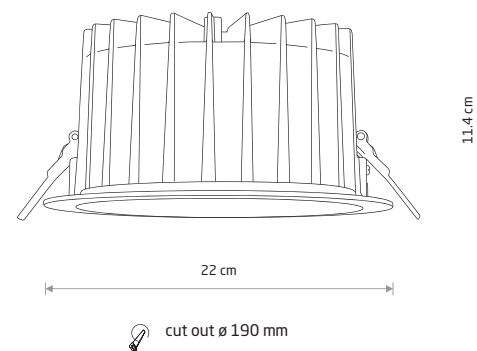

CL KEA LED 40W


plastic

8767 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8720	30W LED	3000K	2250 lm	40 °	≥ 90	IP20	Cree	Osram	50000h	5 years
8722	18W LED	3000K	1500 lm	40 °	≥ 90	IP20	Cree	Osram	50000h	5 years

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8773	20W LED	3000K	1150 lm	65 °	≥ 90	IP44/20	Samsung	Osram	50000h	5 years
8772	20W LED	4000K	1150 lm	65 °	≥ 90	IP44/20	Samsung	Osram	50000h	5 years
8767	40W LED	4000K	2700 lm	65 °	≥ 90	IP44/20	Samsung	Osram	50000h	5 years

MOD 9412



MOD


painted steel

9417

9413

1xGU10 ES111, max 15W only LED

cut out 120×120 mm



MOD

painted steel


9416

9412

2xGU10 ES111, max 15W only LED

cut out 230×120 mm

DOWNLIGHT ES111 9570



DOWNLIGHT ES111

painted steel


9570

9574

2xGU10 ES111, max 15W only LED

cut out 320×165 mm

DOWNLIGHT ES111 9575



DOWNLIGHT ES111

painted steel


9571

9575

1xGU10 ES111, max 15W only LED

cut out 165×165 mm

MOD PLUS 9404



MOD PLUS


painted steel

9404

9408

1xGU10 ES111, max 15W only LED

cut out 120×120 mm



MOD PLUS

painted steel

9403


9407

2xGU10 ES111, max 15W only LED

cut out 230×120 mm



EYE MOD 8937



EYE MOD

■ painted steel


■ 8937

1xGU10 R50, max 10W only LED

cut out 95×90 mm



EYE MOD 8938

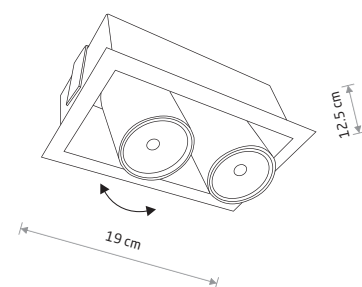

EYE MOD

■ painted steel

■ 8938 ■ 8940

2xGU10 R50, max 10W only LED


cut out 175×90 mm



DOT 9378



DOT 9378



DOT

■ painted steel

■ 9378 ■ 8826

1xGU10 R50, max 10W only LED

cut out ø 129 mm



Track Light Systems

TRACK LIGHT SYSTEMS

Sposoby montażu
Installation methods

System szynoprzewodowy
Track light system

Zastosowanie
Work position

Źródło światła
Source of light

Napięcie
Voltage

Zastosuj z Cameleon System
Works with Cameleon System

NANO LVM
LOW VOLTAGE MAGNETIC
TRACK LIGHT SYSTEM 24V



1 obwodowy system szynoprzewodowy
1 circuit track light system

Sufit / Ceiling
• Natynkowy / Surface
• Podtynkowy / Recessed
• Wiszący / Hanging

Ściana / Wall
• Natynkowy / Surface
• Podtynkowy / Recessed

Zintegrowane źródło światła
LED integrated

~ 24V

No

ULTRA THIN LVM
LOW VOLTAGE MAGNETIC
TRACK LIGHT SYSTEM 48V



1 obwodowy system szynoprzewodowy
1 circuit track light system

Sufit / Ceiling
• Natynkowy / Surface


Ściana / Wall
• Natynkowy / Surface

Zintegrowane źródło światła
LED integrated

~ 48V

No

LVM
LOW VOLTAGE MAGNETIC
TRACK LIGHT SYSTEM 48V

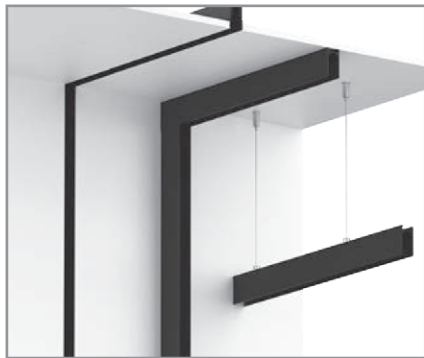

1 obwodowy system szynoprzewodowy
1 circuit track light system

Sufit / Ceiling
• Natynkowy / Surface
• Podtynkowy / Recessed
• Wiszący / Hanging

Ściana / Wall
• Natynkowy / Surface
• Podtynkowy / Recessed

Zintegrowane źródło światła
LED integrated

~ 48V

No

CTLS
COMMERCIAL TRACK LIGHT SYSTEM



3 obwodowy system szynoprzewodowy
3 circuits track light system

Sufit / Ceiling
• Natynkowy / Surface
• Podtynkowy / Recessed
• Wiszący / Hanging

• Wymienne źródło światła,
• zintegrowane źródło światła
• Exchangable source of light,
• LED integrated

~ 230V

Yes

PROFILE
TRACK LIGHT SYSTEM



1 obwodowy system szynoprzewodowy
1 circuit track light system

Sufit / Ceiling
• Natynkowy / Surface
• Podtynkowy / Recessed
• Wiszący / Hanging

• Wymienne źródło światła,
• zintegrowane źródło światła
• Exchangable source of light,
• LED integrated

~ 230V

Yes



NANO LVM Track Light System 24V



NANO - LVM FOCUS OUT LED 10W 11720



NANO - LVM FOCUS OUT LED 5W 11718



NANO - LVM FOCUS OUT LED 10W
painted aluminum, plastic

11720



NANO - LVM FOCUS OUT LED 5W
painted aluminum, plastic

11718



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11720	10W LED	3000K	450 lm	24 °	>90	24V		IP20	30000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11718	5W LED	3000K	290 lm	24 °	>90	24V		IP20	30000h




NANO - LVM LINE OUT LED 20W 11721



NANO - LVM LINE OUT LED 10W 11743

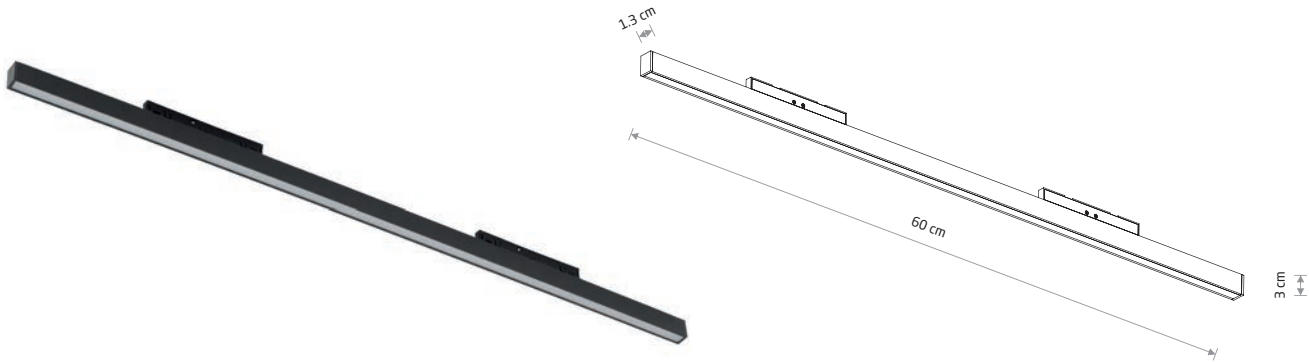

NANO - LVM LINE OUT LED 20W
painted aluminum, plastic

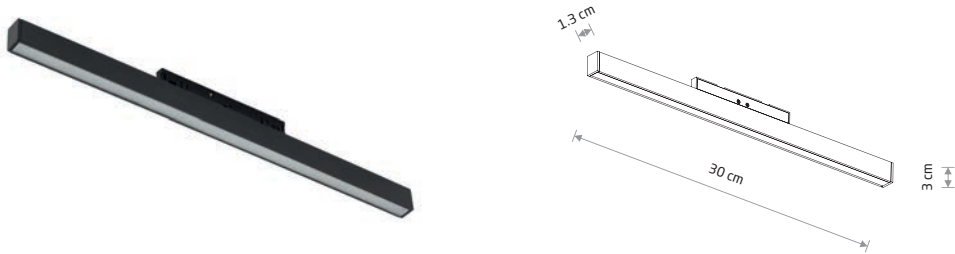

NANO - LVM LINE OUT LED 10W
painted aluminum, plastic



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11721	20W LED	3000K	610 lm	100 °	>90	24V		IP20	30000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11743	10W LED	3000K	400 lm	100 °	>90	24V		IP20	30000h



NANO - LVM LINE IN LED 6W 11717



NANO - LVM LINE OUT LED 6W 11723

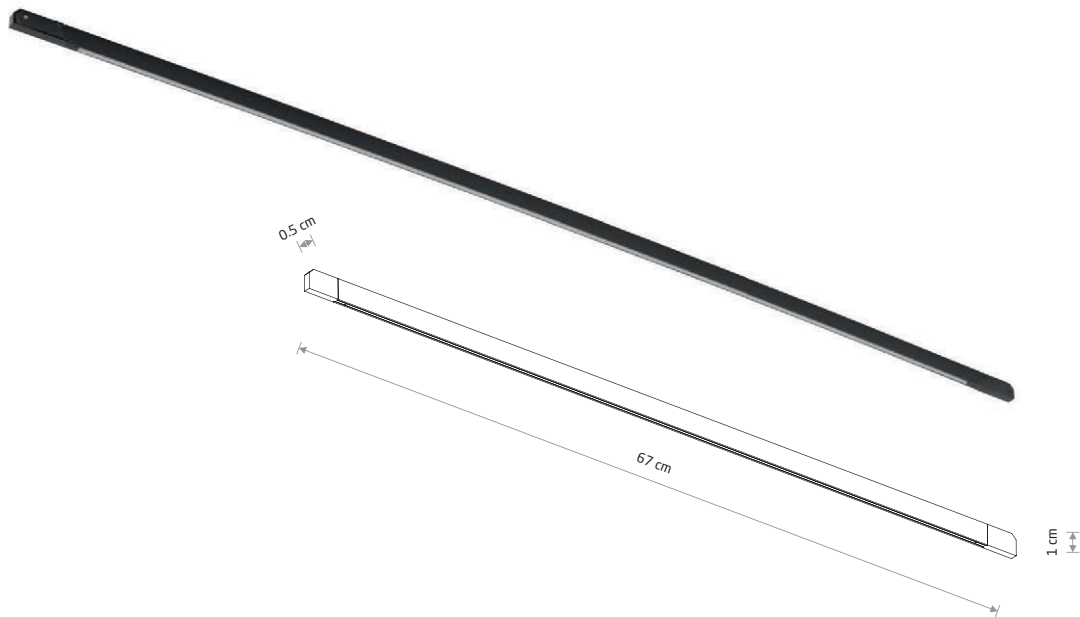

NANO - LVM LINE IN LED 6W
painted aluminum, plastic

11717



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11717	6W LED	3000K	100 lm	100 °	>90	24V		IP20	30000h



NANO - LVM FLEX LINE LED 6W
silicone, plastic

11723





Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11723	6W LED	3000K	180 lm	100 °	>90	24V		IP20	30000h




NANO - LVM SPOT LED 1W 11712



NANO - LVM MUG LED 7W 11722

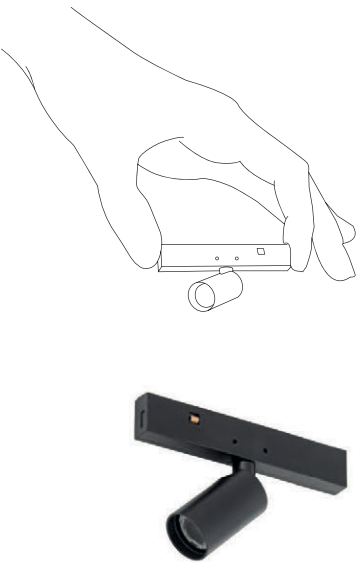

NANO - LVM SPOT LED 1W
painted aluminum, plastic
11712



NANO - LVM MUG LED 7W
painted aluminum, plastic
11722



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11712	1W LED	3000K	65 lm	38 °	>90	24V		IP20	30000h

BLACK

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11722	7W LED	3000K	460 lm	24 °	>90	24V		IP20	30000h

BLACK



NANO - LVM SPOT ZOOM LED 5W 11714







NANO - LVM SPOT ZOOM LED 15W 11716



NANO - LVM SPOT ZOOM LED 2W 11713



NANO - LVM SPOT ZOOM LED 7W 11715

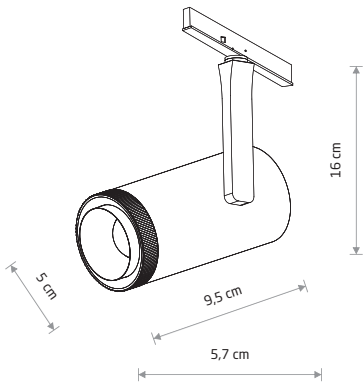

NANO - LVM SPOT ZOOM LED 2W
painted aluminum, plastic

11713



NANO - LVM SPOT ZOOM LED 5W
painted aluminum, plastic

11714



NANO - LVM SPOT ZOOM LED 7W
painted aluminum, plastic

11715



NANO - LVM SPOT ZOOM LED 15W
painted aluminum, plastic

11716



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11713	2W LED	3000K	120 lm	15-45 °	>90	24V	⚡	IP20	30000h
11714	5W LED	3000K	290 lm	15-45 °	>90	24V	⚡	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11715	7W LED	3000K	300 lm	15-45 °	>90	24V	⚡	IP20	30000h
11716	15W LED	3000K	500 lm	15-45 °	>90	24V	⚡	IP20	30000h

SPOSOBY MONTAŽU / INSTALLATION METHODS

1



SURFACE CONNECTION

2



RECESSED CONNECTION

3



SURFACE CONNECTION

4



SURFACE CONNECTION

5



RECESSED CONNECTION

6



SURFACE CONNECTION

7




RECESSED CONNECTION


8




SUSPENDED CONNECTION




NANO - LVM TRACK




NANO - LVM RECESSED TRACK




NANO - LVM TRACK




NANO - LVM TRACK




NANO - LVM RECESSED TRACK




NANO - LVM TRACK




NANO - LVM RECESSED TRACK




NANO - LVM TRACK




NANO - LVM TRACK




NANO - LVM RECESSED TRACK




NANO - LVM INSIDE CORNER




NANO - LVM INSIDE CORNER




NANO - LVM RECESSED INSIDE CORNER




NANO - LVM TRACK




NANO - LVM RECESSED TRACK




NANO - LVM SUSPENSION KIT



NANO - LVM INSIDE CORNER




NANO - LVM RECESSED INSIDE CORNER




NANO - LVM HORIZONTAL CORNER




NANO - LVM CURVE TRACK R400



NANO - LVM RECESSED HORIZONTAL CORNER




NANO - LVM INSIDE CORNER




NANO - LVM RECESSED INSIDE CORNER




NANO - LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODULE FOR SUSPENSION TRACK




ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE




ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE




ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE




ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE




ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE




ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE



ELECTRICAL CONNECTION NANO - LVM CORNER CONDUCTIVE MODULE



NANO LVM - LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM 24V

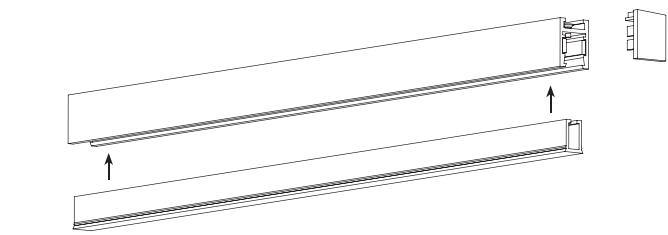

Zestaw zawiera listwę maskującą i zatyczkę
Set includes a masking strip and a plug




1 NANO - LVM TRACK 1M
aluminum
■ 11724

2 NANO - LVM TRACK 2M
aluminum
■ 11725

3 NANO - LVM CURVE
TRACK R400
aluminum
■ 11737

Schemat zasilania / Power supply circuit diagram

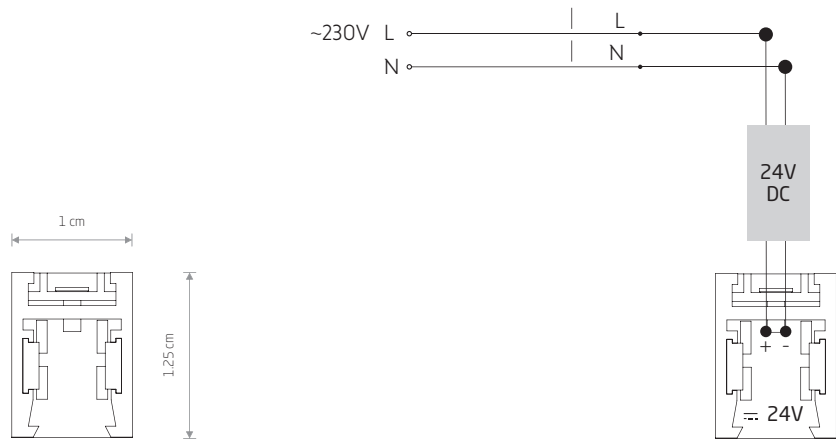


System szynoprzewodowy (NANO LVM) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość systemu szynoprzewodowego z jednego źródła zasilania - 5 m.

The track light system (NANO LVM) should be evenly electrically loaded and the fittings should be evenly placed along its length.
The recommended fastening distance is max. 1000 mm.
Maximum length of track light system with a single power source is 5 m.

■ BLACK

Sposób montażu / Installation methods


1. Zwieszenie na linkach
1. Suspended on steel wires



4 NANO - LVM OUTSIDE
POWER SUPPLY
CONDUCTIVE MODULE
FOR SUSPENSION
TRACK
plastic
■ 11740


5 NANO - LVM RECESSED
OUTSIDE POWER
SUPPLY CONDUCTIVE
MODULE FOR
SUSPENSION TRACK
plastic
■ 11738

6 NANO - LVM
SUSPENSION KIT
steel
■ 11744

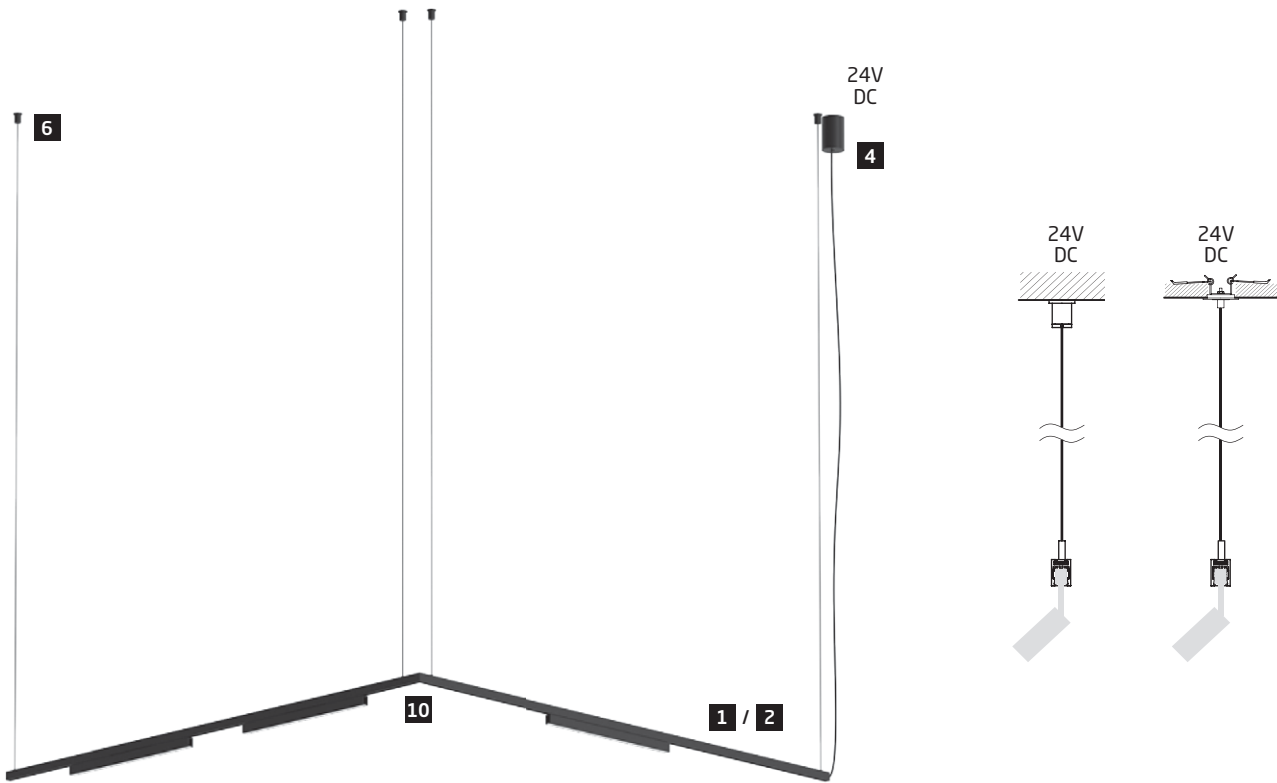



Sposób montażu / Installation method

2. Montaż bezpośredni
2. Surface mounting

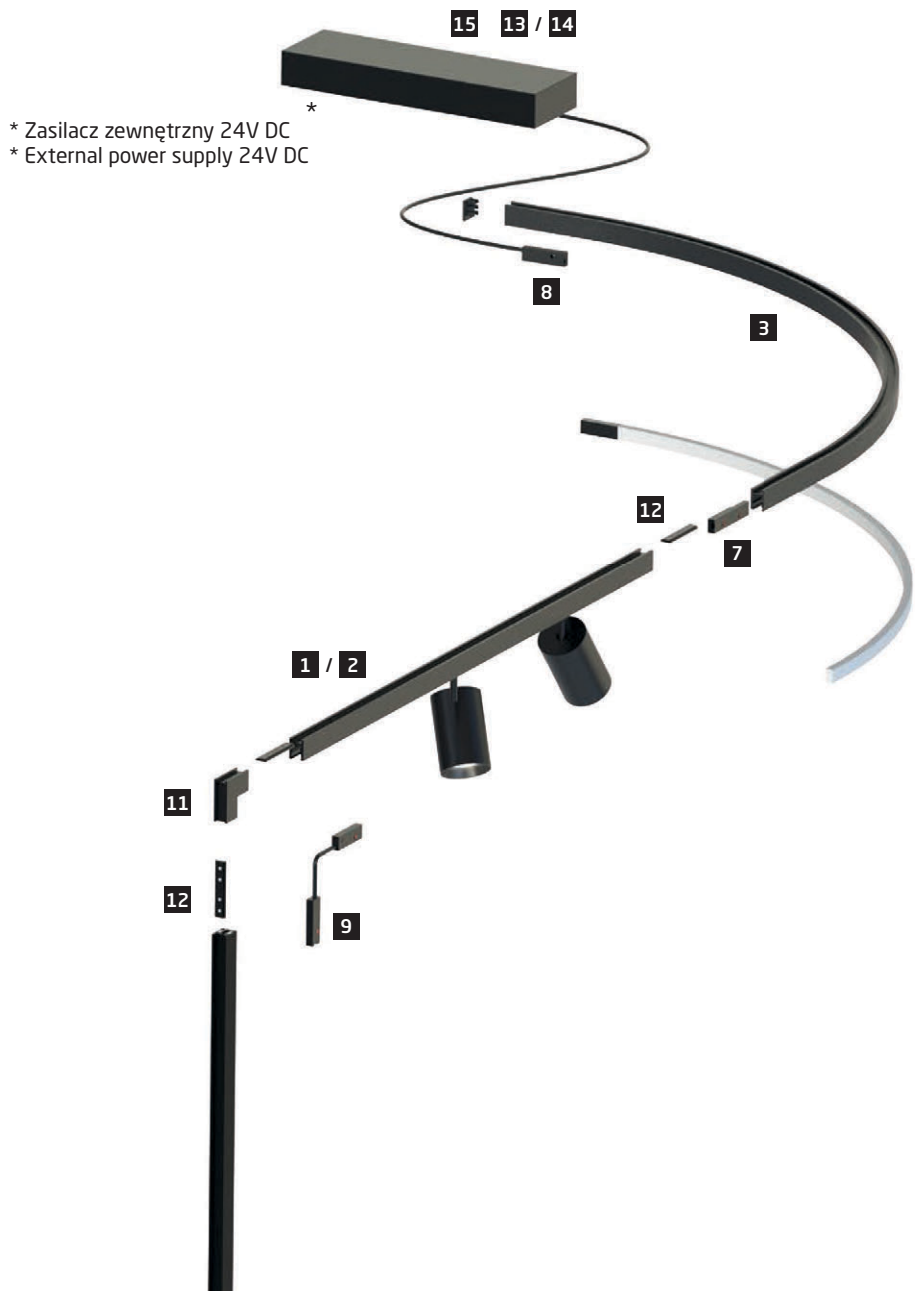


* Zasilacz zewnętrzny 24V DC
* External power supply 24V DC


* Konieczność zastosowania zasilacza zewnętrznego 24V DC.
Zaleca się aby suma watażu użytych opraw nie przekraczała 90% mocy znamionowej zasilacza.
* Need for of using an external 24V DC power supply.
It is recommended that the total wattage of the luminaires used does not exceed 90% of the power supply's rated power.

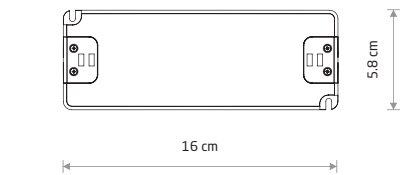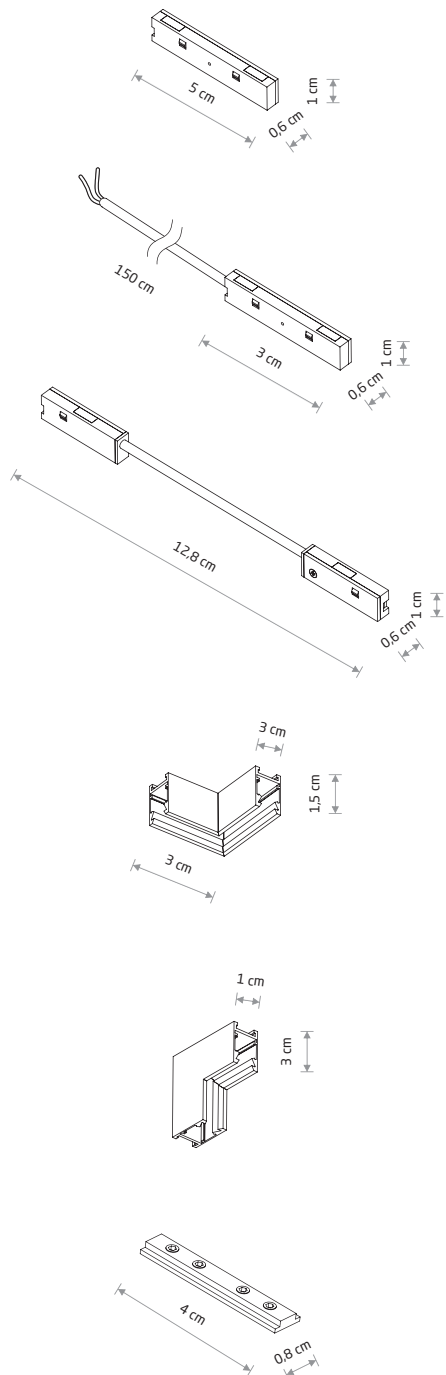

13 24V DC, 75W,
POWER SUPPLY
plastic
11875

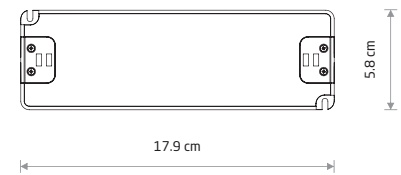


14 24V DC, 150W,
POWER SUPPLY
plastic
11874

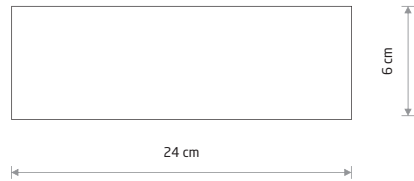

15 POWER SUPPLY
COVER
painted steel
11893 11894

NANO LVM - RECESSED LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM 24V

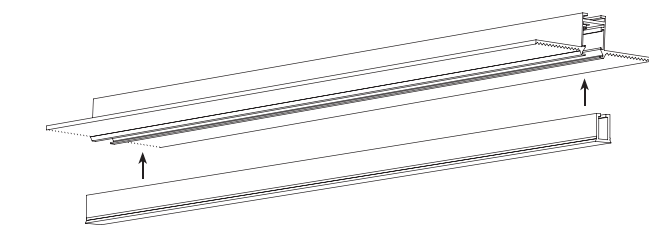


Zestaw zawiera listwę maskującą
Set includes a masking strip

- 1 NANO - LVM RECESSED TRACK 1M
aluminum
11730

- 2 NANO - LVM RECESSED TRACK 2M
aluminum
11731

Schemat zasilania / Power supply circuit diagram

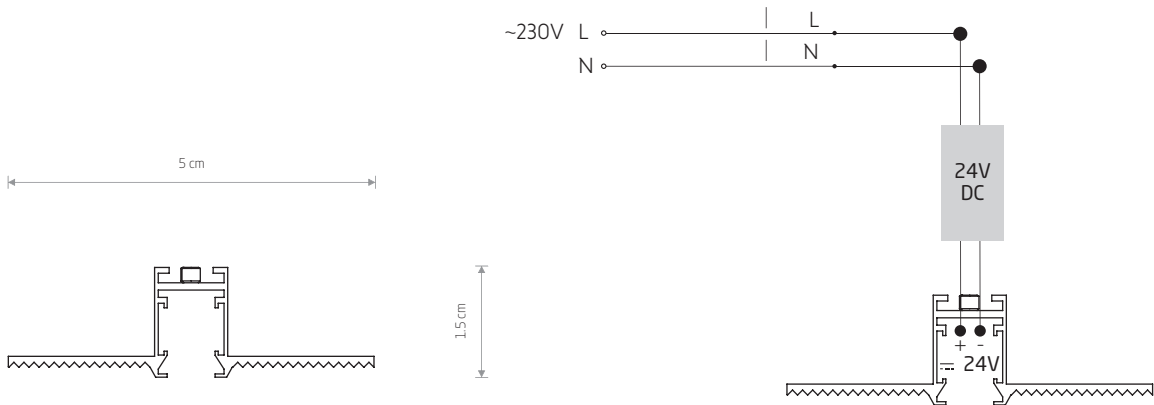


System szynoprzewodowy (NANO LVM) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.
Zalecany dystans pomiędzy mocowaniami 1000 mm.
Maksymalna długość systemu szynoprzewodowego z jednego źródła zasilania - 5 m.


The track light system (NANO LVM) should be evenly electrically loaded and the fittings should be evenly placed along its length.
The recommended fastening distance is 1000 mm.
Maximum length of track light system with a single power source is 5 m.

Sposób montażu / Installation method


1. Montaż podtynkowy
1. Recessed mounting

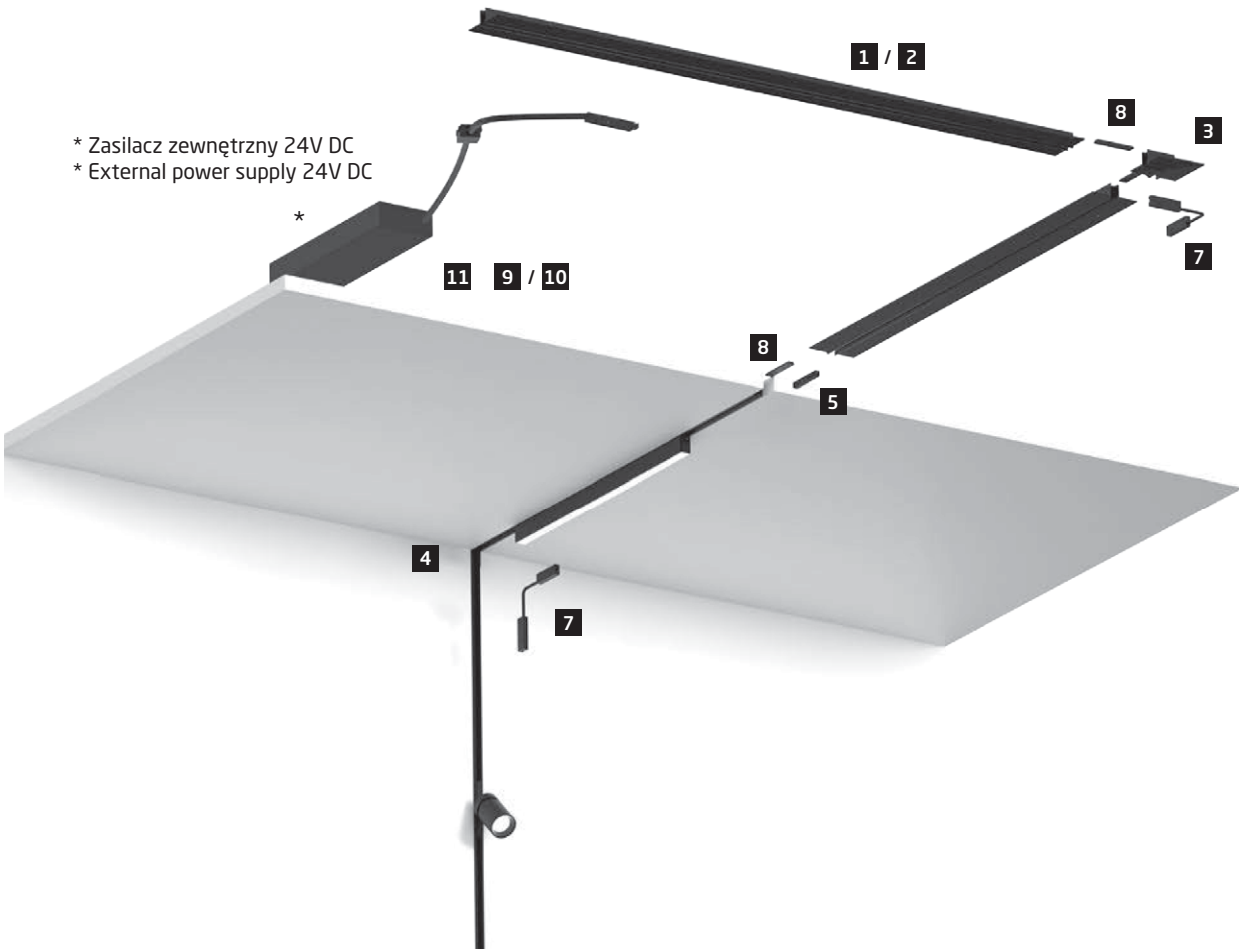


- * Konieczność zastosowania zasilacza zewnętrznego 24V DC.
Zaleca się aby suma watażu użytych opraw nie przekraczała 90% mocy znamionowej zasilacza.
* Need for of using an external 24V DC power supply.
It is recommended that the total wattage of the luminaires used does not exceed 90% of the power supply's rated power.




3 NANO - LVM RECESSED
HORIZONTAL CORNER
aluminum
■ 11732




4 NANO - LVM RECESSED
INSIDE CORNER
aluminum
■ 11733




5 NANO - LVM STRAIGHT
CONDUCTIVE MODULE
plastic
■ 11734




6 NANO - LVM OUTSIDE POWER
SUPPLY CONDUCTIVE MODULE
plastic
■ 11736

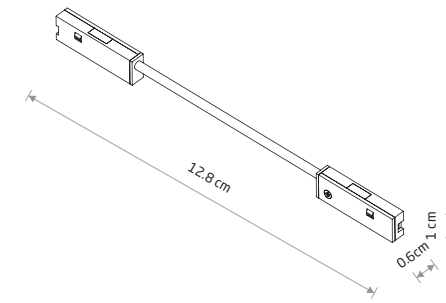


7 NANO - LVM CORNER
CONDUCTIVE MODULE
plastic
■ 11735



8 NANO - LVM TRACK
BUCKLE CONNECTOR
aluminum
■ 11726



9 24V DC, 75W,
POWER SUPPLY
plastic
11875

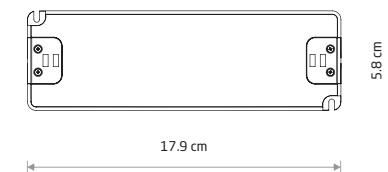

10 24V DC, 150W,
POWER SUPPLY
plastic
11874



Visualisation by Iwona Ligeza

UT-LVM Track Light System 48V



UT-LVM FOCUS LED 18W 11306



UT-LVM FOCUS LED 12W 11305



UT-LVM FOCUS LED 18W
11332

UT-LVM FOCUS LED 18W
aluminum

■ 11306 3000K ■ 11332 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11306	18W LED	3000K	1500 lm	30 °	≥90	48V	⚡	IP20	40000h
11332	18W LED	4000K	1500 lm	30 °	≥90	48V	⚡	IP20	40000h



UT-LVM FOCUS LED 12W
11331

UT-LVM FOCUS LED 12W
aluminum

■ 11305 3000K ■ 11331 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11305	12W LED	3000K	1000 lm	30 °	≥90	48V	⚡	IP20	40000h
11331	12W LED	4000K	1000 lm	30 °	≥90	48V	⚡	IP20	40000h



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Power factor	Lifetime
11308	18W LED	3000K	1500 lm	110 °	≥90	48V	⚡	IP20	40000h
11334	18W LED	4000K	1500 lm	110 °	≥90	48V	⚡	IP20	40000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Power factor	Lifetime
11307	12W LED	3000K	1000 lm	110 °	≥90	48V	⚡	IP20	40000h
11333	12W LED	4000K	1000 lm	110 °	≥90	48V	⚡	IP20	40000h



UT-LVM FOCUS OUT LED 12W 11313




UT-LVM FOCUS OUT LED 6W 11312

ULTRA THIN LVM TRACK LIGHT SYSTEM



UT-LVM FOCUS OUT LED 12W 11338

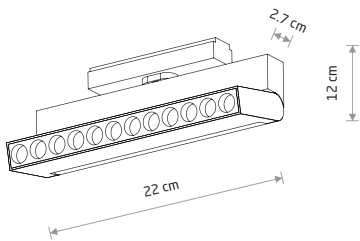

UT-LVM FOCUS OUT LED 12W
aluminum

11313 3000K 11338 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11313	12W LED	3000K	1000 lm	30 °	≥90	48V		IP20	40000h
11338	12W LED	4000K	1000 lm	30 °	≥90	48V		IP20	40000h

BLACK



UT-LVM FOCUS OUT LED 6W 11337



UT-LVM FOCUS OUT LED 6W
aluminum

11312 3000K 11337 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11312	6W LED	3000K	500 lm	30 °	≥90	48V		IP20	40000h
11337	6W LED	4000K	500 lm	30 °	≥90	48V		IP20	40000h

BLACK




UT-LVM FOCUS SWING LED 12W 11311



UT-LVM FOCUS SWING LED 6W 11310



UT-LVM FOCUS SWING LED 12W 11336

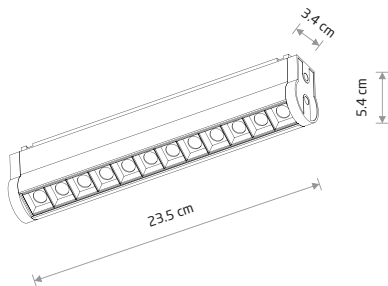

UT-LVM FOCUS SWING LED 12W

aluminum


11311 3000K 11336 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11311	12W LED	3000K	1000 lm	30 °	≥90	48V	III	IP20	40000h
11336	12W LED	4000K	1000 lm	30 °	≥90	48V	III	IP20	40000h



UT-LVM FOCUS SWING LED 6W 11335



UT-LVM FOCUS SWING LED 6W

aluminum

11310 3000K 11335 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11310	6W LED	3000K	500 lm	30 °	≥90	48V	III	IP20	40000h
11335	6W LED	4000K	500 lm	30 °	≥90	48V	III	IP20	40000h




UT-LVM SPOT LED 5W 11314



UT-LVM SPOT LED 9W 11315



UT-LVM SPOT LED 5W
11340




UT-LVM SPOT LED 5W

aluminum

■ 11314 3000K ■ 11340 4000K



UT-LVM SPOT LED 9W
11341



UT-LVM SPOT LED 9W

aluminum

■ 11315 3000K ■ 11341 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11314	5W LED	3000K	450 lm	36 °	≥90	48V	⚡	IP20	40000h
11340	5W LED	4000K	450 lm	36 °	≥90	48V	⚡	IP20	40000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11315	9W LED	3000K	850 lm	36 °	≥90	48V	⚡	IP20	40000h
11341	9W LED	4000K	850 lm	36 °	≥90	48V	⚡	IP20	40000h



UT-LVM SPOT LED 12W 11316



UT-LVM SPOT LED 12W 11342

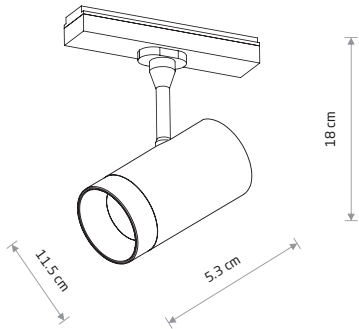


UT-LVM SPOT LED 12W
aluminum

■ 11316 3000K ■ 11342 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11316	12W LED	3000K	1200 lm	36 °	≥90	48V	⚡	IP20	40000h
11342	12W LED	4000K	1200 lm	36 °	≥90	48V	⚡	IP20	40000h

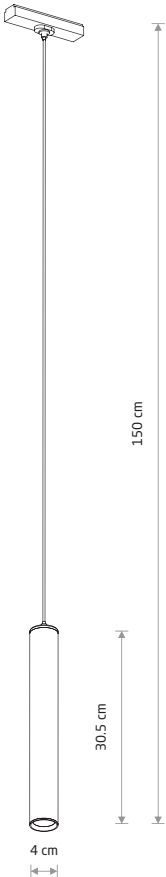

UT-LVM ROLLER LED 10W
aluminum

■ 11317 3000K ■ 11343 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11317	10W LED	3000K	1000 lm	36 °	≥90	48V	⚡	IP20	40000h
11343	10W LED	4000K	1000 lm	36 °	≥90	48V	⚡	IP20	40000h

UT-LVM ROLLER LED 10W 11317



SPOSOBY MONTAŻU / INSTALLATION METHODS




SURFACE CONNECTION



SURFACE CONNECTION



SURFACE CONNECTION




UT-LVM TRACK




UT-LVM TRACK



UT-LVM TRACK




UT-LVM TRACK




UT-LVM VERTICAL
CONNECTOR




UT-LVM TRACK




UT-LVM VERTICAL
CONNECTOR




UT-LVM L CONNECTOR




UT-LVM VERTICAL
CONNECTOR



UT-LVM END CAP




UT-LVM END CAP



UT-LVM END CAP

UT-LVM TRACK LIGHT SYSTEM 48V

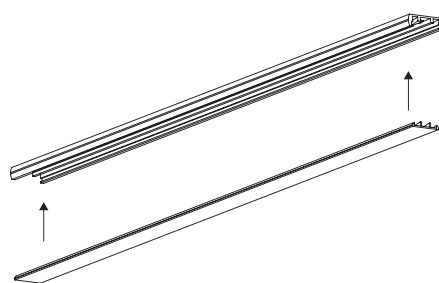

Zestaw zawiera listwę maskującą
Set includes a masking strip

1 UT-LVM TRACK 1M

aluminum



11320

2 UT-LVM TRACK 2M

aluminum

11318

Schemat zasilania / Power supply circuit diagram







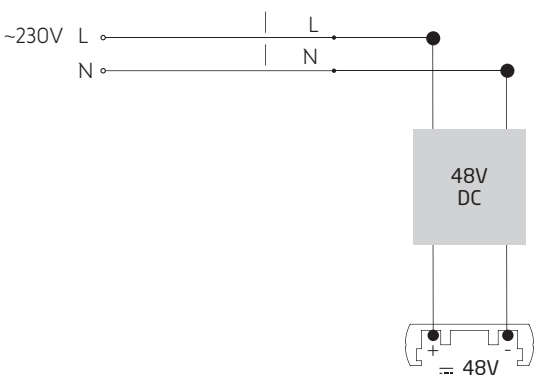


System szynoprzewodowy (UT-LVM) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość systemu szynoprzewodowego z jednego źródła zasilania - 20 m.

The track light system (UT-LVM) should be evenly electrically loaded and the fittings should be evenly placed along its length.
The recommended fastening distance is max. 1000 mm.
Maximum length of track light system with a single power source is 20 m.

SPOSOBY MONTAŻU / INSTALLATION METHODS

1. Montaż bezpośredni
1. Surface mounting

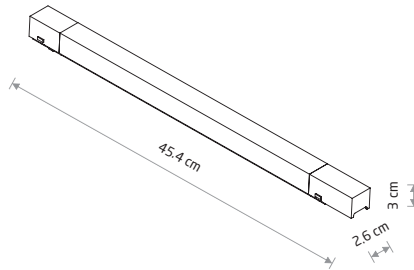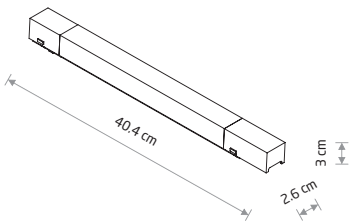

3 UT-LVM 48V, 100W
INSIDE POWER SUPPLY
aluminum
■ 11328

4 UT-LVM 48V, 200W
INSIDE POWER SUPPLY
aluminum
■ 11330

5 UT-LVM OUTSIE POWER
SUPPLY CONDUCTIVE
MODULE
plastic, copper
■ 11321

6 UT-LVM VERTICAL
CONNECTOR
plastic, copper
■ 11326

7 UT-LVM STRAIGHT
CONNECTOR
plastic, copper
■ 11322

8 UT-LVM L CONNECTOR
plastic, copper
■ 11325

9 UT-LVM END CAP
plastic
■ 11327



LVM Track Light System 48V




LVM FOCUS LED 15W 10150



LVM FOCUS LED 9W 10144



LVM FOCUS LED 15W
10643

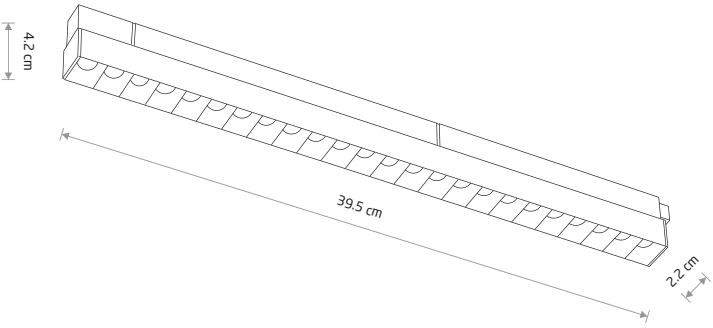

4.2 cm
39.5 cm
2.2 cm

LVM FOCUS LED 15W
painted aluminum, plastic

10150 3000K

10643 4000K


11630 3000K

11631 4000K





LVM FOCUS LED 9W
11632

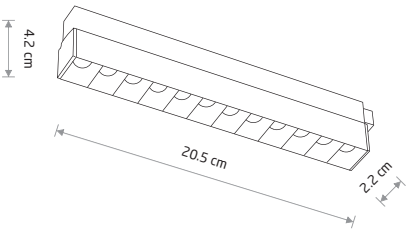

4.2 cm
20.5 cm
2.2 cm

LVM FOCUS LED 9W
painted aluminum, plastic

10144 3000K

10644 4000K

11632 3000K

11633 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10150	15W LED	3000K	1300 lm	30 °	>90	48V		IP20	30000h
10643	15W LED	4000K	1400 lm	30 °	>90	48V		IP20	30000h
11630	15W LED	3000K	1300 lm	30 °	>90	48V		IP20	30000h
11631	15W LED	4000K	1400 lm	30 °	>90	48V		IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10144	9W LED	3000K	800 lm	30 °	>90	48V		IP20	30000h
10644	9W LED	4000K	880 lm	30 °	>90	48V		IP20	30000h
11632	9W LED	3000K	800 lm	30 °	>90	48V		IP20	30000h
11633	9W LED	4000K	880 lm	30 °	>90	48V		IP20	30000h




LVM FOCUS OUT LED 15W 10151



LVM FOCUS OUT LED 9W 10145



LVM FOCUS OUT LED 15W
10645

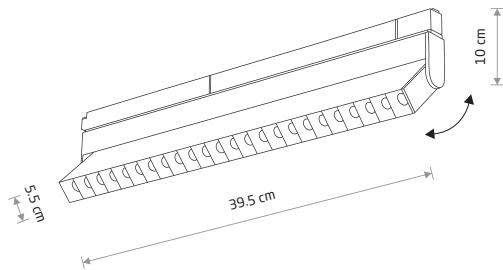

LVM FOCUS OUT LED 15W
painted aluminum, plastic

■ 10151 3000K ■ 10645 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10151	15W LED	3000K	1300 lm	30 °	>90	48V	⚡	IP20	30000h
10645	15W LED	4000K	1400 lm	30 °	>90	48V	⚡	IP20	30000h

■ BLACK ■ WHITE



LVM FOCUS OUT LED 9W
11634



LVM FOCUS OUT LED 9W
painted aluminum, plastic

■ 10145 3000K ■ 10646 4000K

■ 11634 3000K ■ 11635 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10145	9W LED	3000K	800 lm	30 °	>90	48V	⚡	IP20	30000h
10646	9W LED	4000K	880 lm	30 °	>90	48V	⚡	IP20	30000h
11634	9W LED	3000K	800 lm	30 °	>90	48V	⚡	IP20	30000h
11635	9W LED	4000K	880 lm	30 °	>90	48V	⚡	IP20	30000h


■ WHITE ■ BLACK



LVM LINE LED 15W 10148



LVM LINE LED 9W 10143

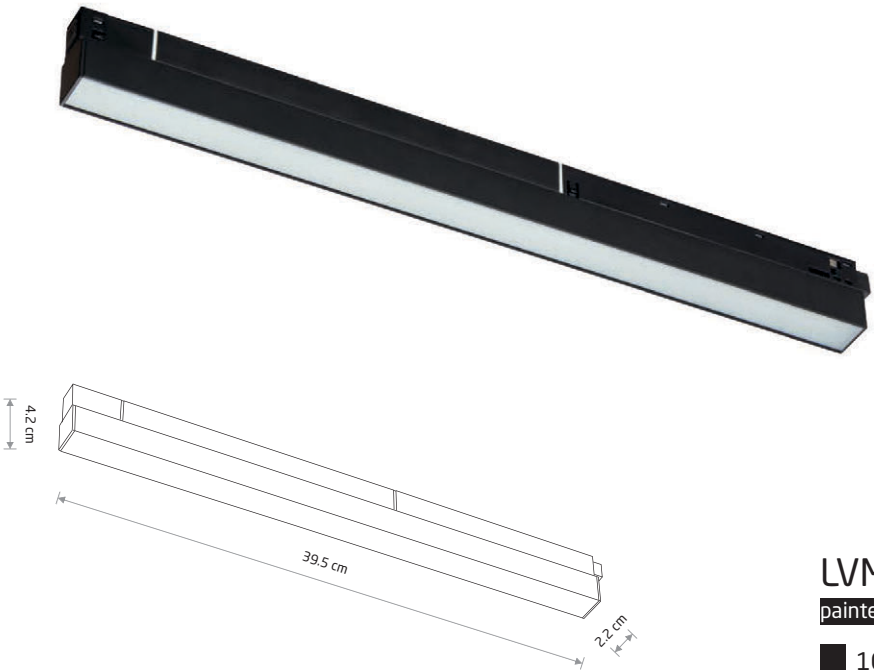

LVM LINE LED 15W
10650

LVM LINE LED 15W
painted aluminum, plastic

- 10148 3000K
- 10650 4000K
- 11636 3000K
- 11637 4000K



LVM LINE LED 9W
10651

LVM LINE LED 9W
painted aluminum, plastic

- 10143 3000K
- 10651 4000K
- 11638 3000K
- 11639 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10148	15W LED	3000K	700 lm	110 °	>90	48V		IP20	30000h
10650	15W LED	4000K	770 lm	110 °	>90	48V		IP20	30000h
11636	15W LED	3000K	700 lm	110 °	>90	48V		IP20	30000h
11637	15W LED	4000K	770 lm	110 °	>90	48V		IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10143	9W LED	3000K	400 lm	110 °	>90	48V		IP20	30000h
10651	9W LED	4000K	440 lm	110 °	>90	48V		IP20	30000h
11638	9W LED	3000K	400 lm	110 °	>90	48V		IP20	30000h
11639	9W LED	4000K	440 lm	110 °	>90	48V		IP20	30000h



LVM SPOT LED 15W 10147




LVM SPOT LED 9W 10142



LVM SPOT LED 15W
10655




LVM SPOT LED 9W
10656



LVM SPOT LED 15W
painted aluminum, plastic

- 10147 3000K
- 10655 4000K
- 11642 3000K
- 11643 4000K



LVM SPOT LED 9W
painted aluminum, plastic

- 10142 3000K
- 10656 4000K
- 11644 3000K
- 11645 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10147	15W LED	3000K	1020 lm	30 °	>90	48V		IP20	30000h
10655	15W LED	4000K	1100 lm	30 °	>90	48V		IP20	30000h
11642	15W LED	3000K	1020 lm	30 °	>90	48V		IP20	30000h
11643	15W LED	4000K	1100 lm	30 °	>90	48V		IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10142	9W LED	3000K	780 lm	30 °	>90	48V		IP20	30000h
10656	9W LED	4000K	850 lm	30 °	>90	48V		IP20	30000h
11644	9W LED	3000K	780 lm	30 °	>90	48V		IP20	30000h
11645	9W LED	4000K	850 lm	30 °	>90	48V		IP20	30000h



LVM ROLLER LED 9W
10652

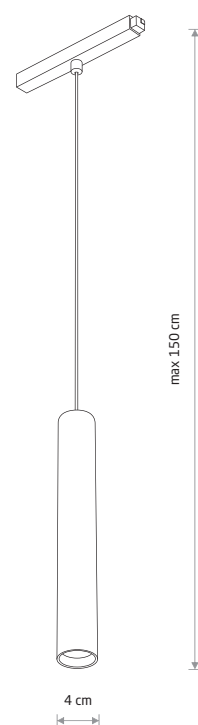

LVM ROLLER LED 9W

painting aluminum, plastic

■ 10146 3000K ■ 10652 4000K

■ 11640 3000K ■ 11641 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10146	9W LED	3000K	620 lm	36 °	>90	48V	III	IP20	30000h
10652	9W LED	4000K	680 lm	36 °	>90	48V	III	IP20	30000h
11640	9W LED	3000K	620 lm	36 °	>90	48V	III	IP20	30000h
11641	9W LED	4000K	680 lm	36 °	>90	48V	III	IP20	30000h

■ BLACK ■ WHITE




LVM FOCUS OUT LED 9W
10145

LVM ROLLER LED 9W
10146



LVM LID LED 8W
10647




LVM LID LED 8W

■ painted aluminum, plastic PMMA

■ 10152 3000K ■ 10647 4000K



LVM LID LED 8W
10648

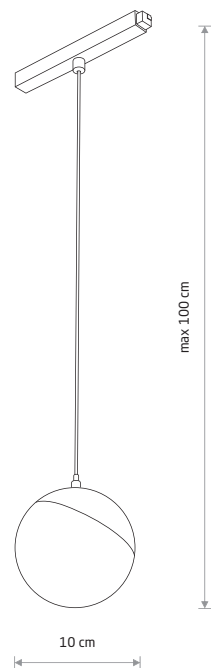


LVM LID LED 8W

■ painted aluminum, plastic PMMA

■ 10153 3000K ■ 10648 4000K



LVM SLOT LED 5W
10653

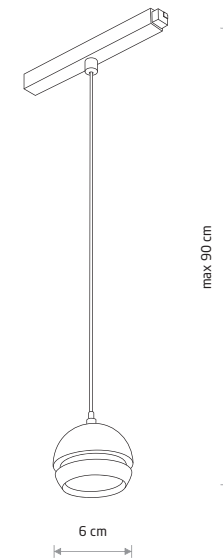


LVM SLOT LED 5W

■ painted aluminum, plastic PMMA

■ 10154 3000K ■ 10653 4000K



LVM SLOT LED 8W
10654

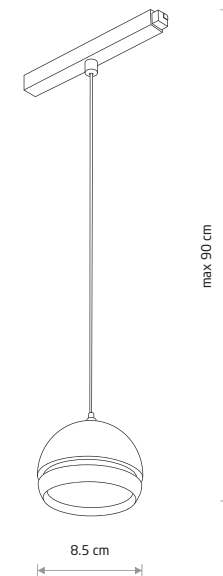

LVM SLOT LED 8W

■ painted aluminum, plastic PMMA


























■ 10155 3000K ■ 10654 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10152	8W LED	3000K	650 lm	160 °	>90	48V	■	IP20	30000h
10647	8W LED	4000K	650 lm	160 °	>90	48V	■	IP20	30000h
10153	8W LED	3000K	650 lm	160 °	>90	48V	■	IP20	30000h
10648	8W LED	4000K	650 lm	160 °	>90	48V	■	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
10154	5W LED	3000K	210 lm	100 °	>90	48V	■	IP20	30000h
10653	5W LED	4000K	250 lm	100 °	>90	48V	■	IP20	30000h
10155	8W LED	3000K	370 lm	100 °	>90	48V	■	IP20	30000h
10654	8W LED	4000K	400 lm	100 °	>90	48V	■	IP20	30000h


SPOSOBY MONTAŻU / INSTALLATION METHODS

1 	2 	3 	4 	5 	6 	7 
SURFACE CONNECTION	RECESSED - SURFACE CONNECTION	SURFACE - RECESSED CONNECTION	RECESSED CONNECTION	SURFACE CONNECTION	RECESSED CONNECTION	SUSPENDED CONNECTION
						
LVM TRACK	LVM RECESSED TRACK	LVM TRACK	LVM RECESSED TRACK	LVM TRACK	LVM RECESSED TRACK	LVM TRACK
						
LVM TRACK	LVM TRACK	LVM RECESSED TRACK	LVM RECESSED TRACK	LVM INSIDE CORNER	LVM RECESSED HORIZONTAL CORNER	LVM POWER SUPPLY KIT
						
LVM INSIDE CORNER	LVM INSIDE CORNER	LVM INSIDE CORNER	LVM RECESSED INSIDE CORNER	LVM HORIZONTAL CORNER	LVM RECESSED INSIDE CORNER	LVM SUSPENSION KIT
						
ELECTRICAL CONNECTION LVM CORNER CONDUCTIVE MODULE	ELECTRICAL CONNECTION LVM CORNER CONDUCTIVE MODULE	ELECTRICAL CONNECTION LVM CORNER CONDUCTIVE MODULE	ELECTRICAL CONNECTION LVM CORNER CONDUCTIVE MODULE	ELECTRICAL CONNECTION LVM CORNER CONDUCTIVE MODULE	ELECTRICAL CONNECTION LVM CORNER CONDUCTIVE MODULE	


8




SURFACE CONNECTION




LVM TRACK



LVM TRACK




LVM INSIDE CORNER




ELECTRICAL CONNECTION
LVM CORNER CONDUCTIVE
MODULE


9

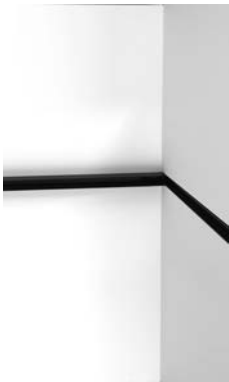


RECESSED - SURFACE
CONNECTION




LVM TRACK



LVM RECESSED TRACK



LVM INSIDE CORNER




ELECTRICAL CONNECTION
LVM CORNER CONDUCTIVE
MODULE


10




SURFACE - RECESSED
CONNECTION




LVM RECESSED TRACK



LVM TRACK




LVM INSIDE CORNER




ELECTRICAL CONNECTION
LVM CORNER CONDUCTIVE
MODULE


11

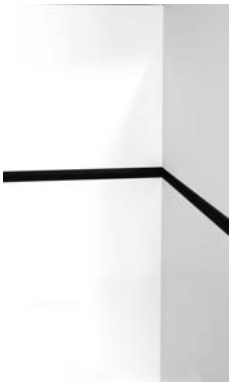


RECESSED CONNECTION




LVM RECESSED TRACK



LVM RECESSED TRACK




LVM RECESSED
INSIDE CORNER



ELECTRICAL CONNECTION
LVM CORNER CONDUCTIVE
MODULE

LVM - LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM

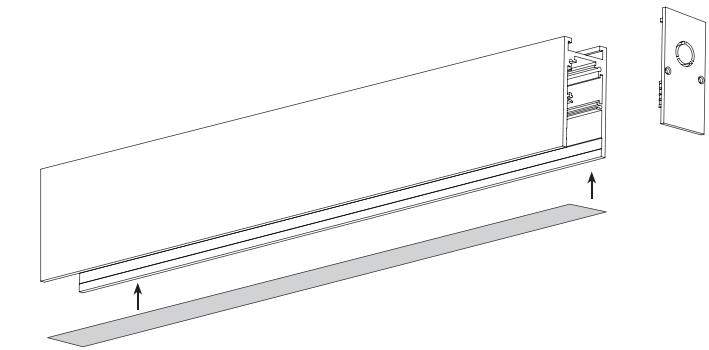


Zestaw zawiera listwę maskującą i zatyczkę
Set includes a masking strip and a plug

1 LVM TRACK 1M
aluminum
10162 11626

2 LVM TRACK 2M
aluminum
10163 11627

Schemat zasilania / Power supply circuit diagram

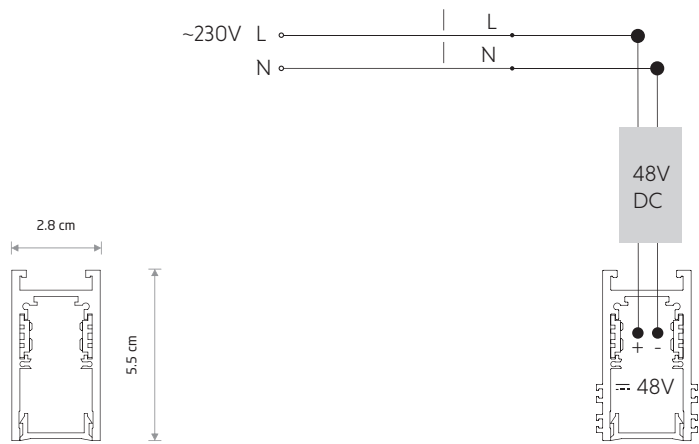


System szynoprzewodowy (LVM) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość systemu szynoprzewodowego z jednego źródła zasilania - 20 m.

The track light system (LVM) should be evenly electrically loaded and the fittings should be evenly placed along its length.
The recommended fastening distance is max. 1000 mm.
Maximum length of track light system with a single power source is 20 m.

BLACK WHITE

Sposób montażu / Installation method

1. Zwieszenie na linkach
1. Suspended on steel wires



3 LVM POWER SUPPLY KIT
plastic, painted steel
10597 11803





4 LVM SUSPENSION KIT
steel
10170




WHITE SILVER BLACK

Sposób montażu / Installation method


2. Montaż bezpośredni
2. Surface mounting

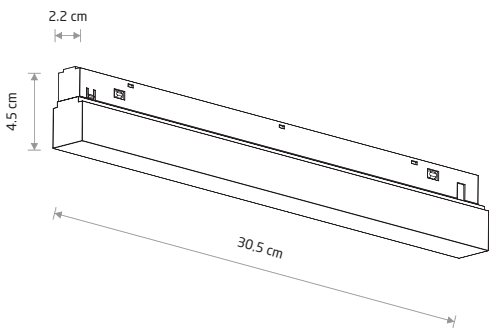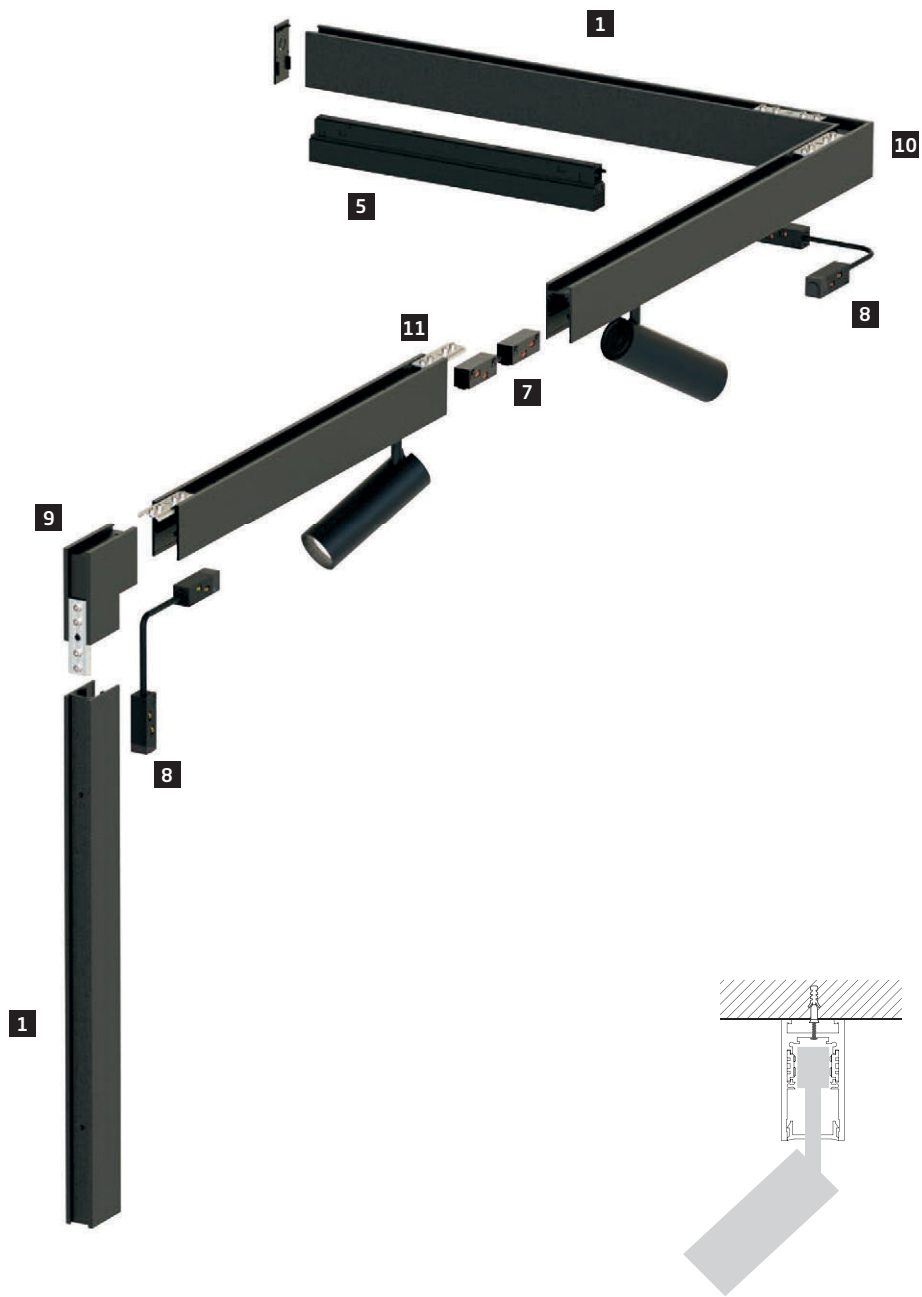


**5 LVM 48V, 150W,
INSIDE POWER SUPPLY**
aluminum
■ 10161 ■ 11616




**6 LVM OUTSIDE POWER SUPPLY
CONDUCTIVE MODULE**
plastic
■ 10168 ■ 11621




**7 LVM STRAIGHT
CONDUCTIVE MODULE**
plastic
■ 10167 ■ 11628

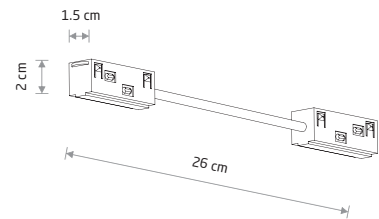


**8 LVM CORNER
CONDUCTIVE MODULE**
plastic
■ 10166 ■ 11617



9 LVM INSIDE CORNER
aluminum
■ 10165 ■ 11620
includes 2xLVM TRACK BUCKLE CONNECTOR




**10 LVM HORIZONTAL
CORNER**
aluminum
■ 10164 ■ 11618
includes 2xLVM TRACK BUCKLE CONNECTOR




**11 LVM TRACK BUCKLE
CONNECTOR**
steel
■ 10171

LVM - RECESSED LOW VOLTAGE MAGNETIC TRACK LIGHT SYSTEM

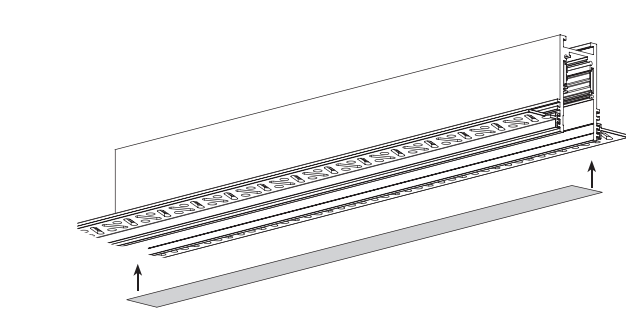

Zestaw zawiera listwę maskującą
Set includes a masking strip

Schemat zasilania / Power supply circuit diagram

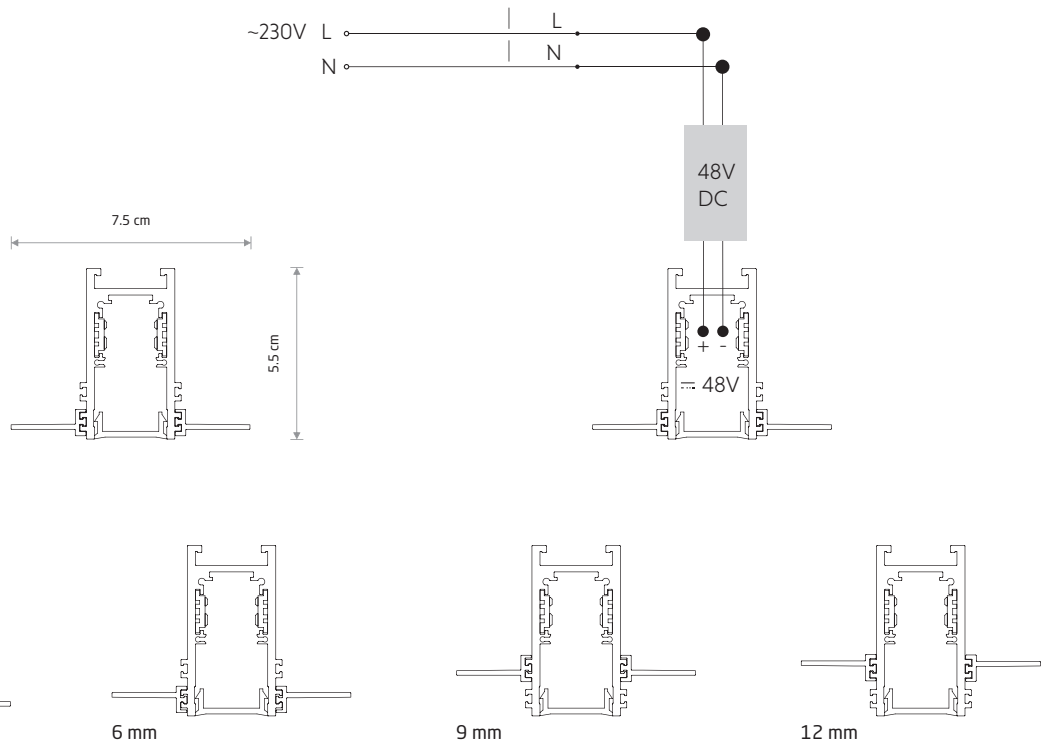


Konstrukcja szynoprzewodów umożliwia dostosowanie wysokości skrzydełek do różnych grubości płyt gipsowo-kartonowych.
Możliwa regulacja to: 3, 6, 9 i 12 mm.
System szynoprzewodowy (LVM) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość systemu szynoprzewodowego z jednego źródła zasilania - 20 m.

The design of the track light system makes it possible to adjust the height of the wings for different thicknesses of drywall.
Possible adjustments are: 3, 6, 9 and 12 mm.
The track light system (LVM) should be evenly electrically loaded and the fittings should be evenly placed along its length.
The recommended fastening distance is max. 1000 mm.
Maximum length of track light system with a single power source is 20 m.

BLACK WHITE

Sposób montażu / Installation method


1. Montaż podtynkowy
1. Recessed mounting

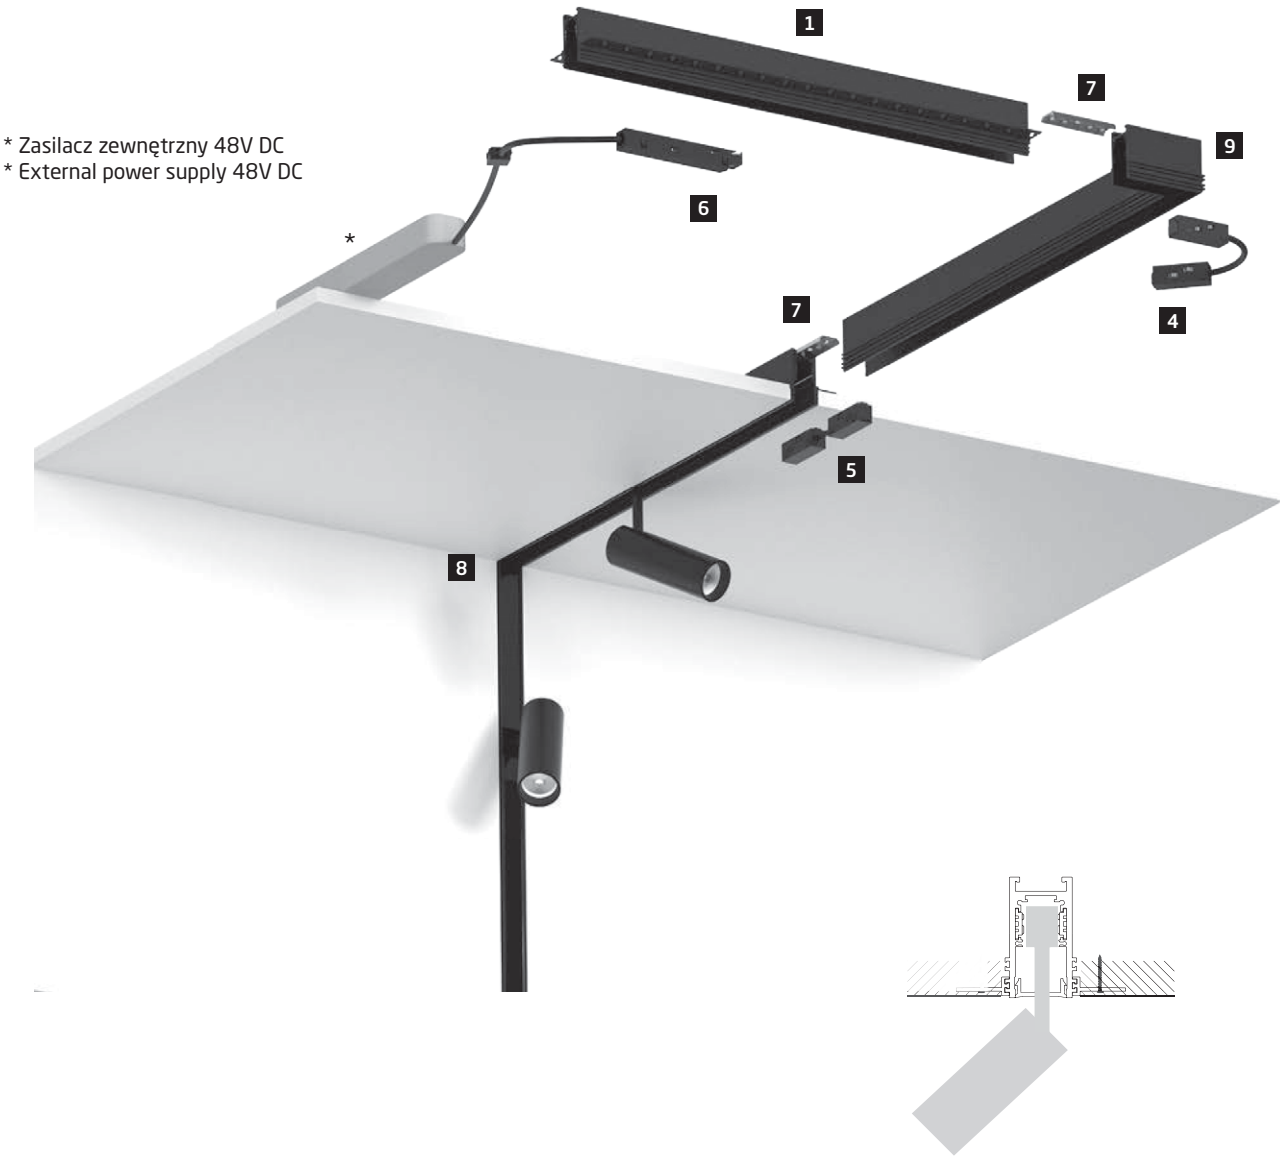

* Zasilacz zewnętrzny 48V DC
* External power supply 48V DC

* Możliwość zastosowania zasilacza zewnętrznego 48V DC.
Zaleca się aby suma watażu użytych opraw nie przekraczała 90% mocy znamionowej zasilacza.
* Possibility of using an external 48V DC power supply.
It is recommended that the total wattage of the luminaires used does not exceed 90% of the power supply's rated power.


WHITE BLACK

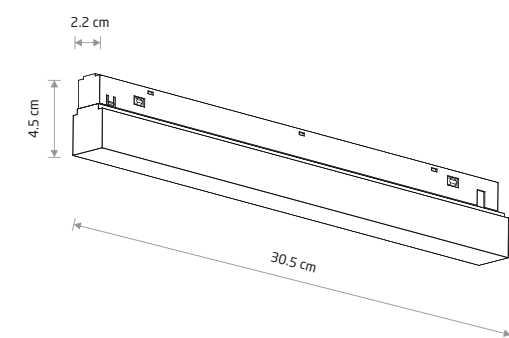

3 LVM 48V, 150W, INSIDE POWER SUPPLY

aluminium


10161 11616

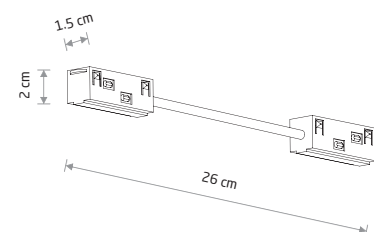

4 LVM CORNER CONDUCTIVE MODULE

plastic


10166 11617



5 LVM STRAIGHT CONDUCTIVE MODULE

plastic


10167 11628



6 LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODULE

plastic


10168 11621



7 LVM TRACK BUCKLE CONNECTOR

steel

10171




8 LVM RECESSED INSIDE CORNER

aluminium

10160 11623

includes 2xLVM TRACK BUCKLE CONNECTOR




9 LVM RECESSED HORIZONTAL CORNER

aluminium

10158 11622

includes 2xLVM TRACK BUCKLE CONNECTOR



10 48V DC, 80W, POWER SUPPLY

plastic


11301



11 48V DC, 200W, POWER SUPPLY

plastic

11287

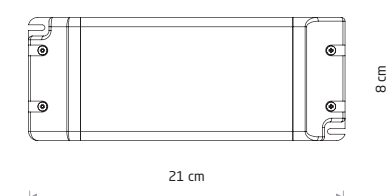

12 48V DC, 320W, POWER SUPPLY

plastic

11278



CTLS - Commercial Track Light System




CTLS MILO LED 15W 8766

Zestaw zawiera 3 soczewki
3 lenses included



CTLS MILO LED 25W 8762


Zestaw zawiera 3 soczewki
3 lenses included



CTLS MILO LED 15W

zinc aluminum alloy

- 8766 3000K 8765 4000K
- 8764 3000K 8763 4000K



CTLS MILO LED 25W


zinc aluminum alloy

- 8762 3000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8766	15W LED	3000K	1300 lm	15/24/50 °	≥ 90	IP20	Samsung	Ostram	50000h	5 years
8765	15W LED	4000K	1300 lm	15/24/50 °	≥ 90	IP20	Samsung	Ostram	50000h	5 years
8764	15W LED	3000K	1300 lm	15/24/50 °	≥ 90	IP20	Samsung	Ostram	50000h	5 years
8763	15W LED	4000K	1300 lm	15/24/50 °	≥ 90	IP20	Samsung	Ostram	50000h	5 years

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8762	25W LED	3000K	1900 lm	15/24/40 °	≥ 90	IP20	Samsung	Ostram	50000h	5 years




CTLS NEA LED 20W

zinc aluminum alloy

8757 3000K 8756 4000K



Zestaw zawiera 3 soczewki i filtr przeciwośnieniowy "plaster miodu"
3 lenses and anti-glare "honeycomb" included



CTLS NEA LED 30W


zinc aluminum alloy

8752 4000K




Zestaw zawiera 3 soczewki i filtr przeciwośnieniowy "plaster miodu"
3 lenses and anti-glare "honeycomb" included

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8752	30W LED	4000K	2600 lm	20/25/37°	≥ 90	IP20	Samsung	Ostram	50000h	5 years

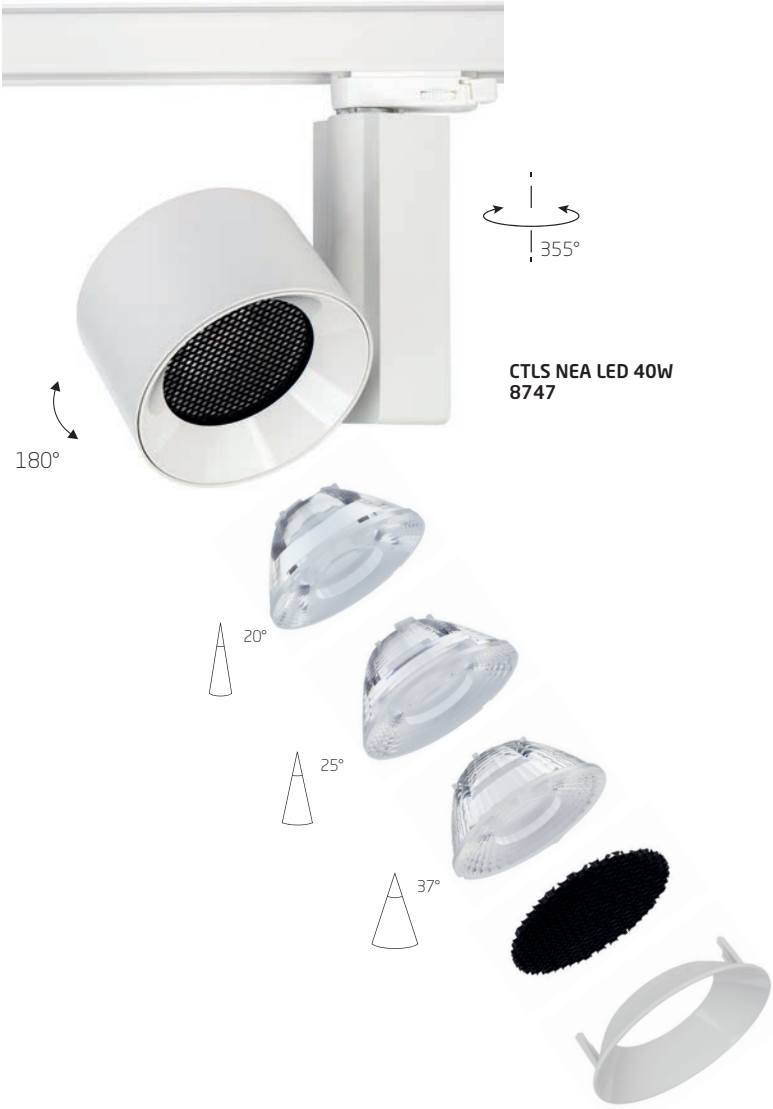

Zestaw zawiera 3 soczewki i filtr przeciwośnieniowy
"plaster miodu"
3 lenses and anti-glare "honeycomb" included



CTLS NEA LED 40W

zinc aluminum alloy

8747 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Ingress protection	LED brand	Driver brand	Lifetime	Warranty
8747	40W LED	4000K	3600 lm	20/25/37°	≥ 90	IP20	Samsung	Ostram	50000h	5 years



CTLS NEA LED 40W 8747




CTLS TINOS LED 10W
10396



CTLS TINOS LED 20W
10391




CTLS TINOS LED 30W
10398

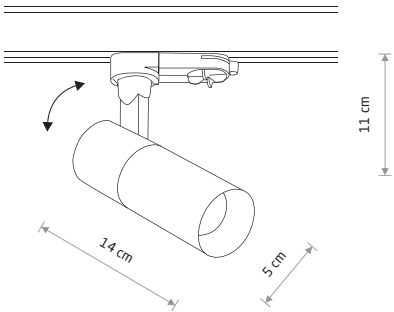


CTLS TINOS LED 10W
painted aluminum, plastic

- 10390 3000K
- 10393 4000K
- 10396 3000K
- 10399 4000K

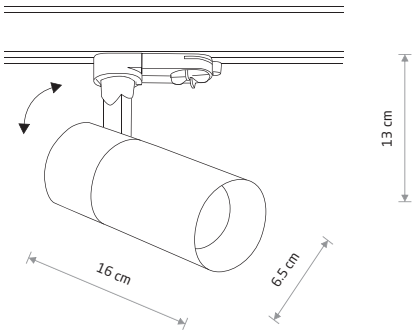

CTLS TINOS LED 20W
painted aluminum, plastic

- 10391 3000K
- 10394 4000K
- 10397 3000K
- 10400 4000K

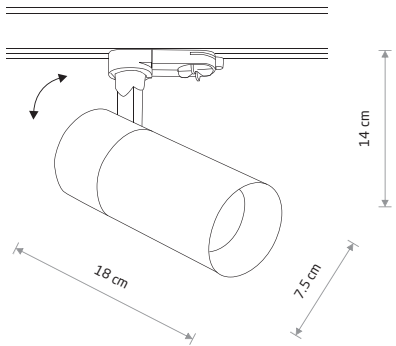

CTLS TINOS LED 30W
painted aluminum, plastic

- 10398 3000K
- 10401 4000K
- 10395 4000K




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10390	10W LED	3000K	950 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10393	10W LED	4000K	1000 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10396	10W LED	3000K	880 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10399	10W LED	4000K	980 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10391	20W LED	3000K	1800 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10394	20W LED	4000K	2000 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10397	20W LED	3000K	1700 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10400	20W LED	4000K	1900 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

WHITE BLACK

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10398	30W LED	3000K	2600 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10401	30W LED	4000K	2900 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h
10395	30W LED	4000K	3000 lm	36 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP20	30000h

WHITE BLACK

CTLS SNOWBALL
11296



CTLS SNOWBALL


plastic PC, glass, painted steel

■ 11296

● 1xG9, max 12W only LED

● BULB LED G9, 4W

□ 7503 3000K □ 7504 4000K



CTLS MONO

painted steel, plastic ABS

■ 10235 □ 10236

■ 10238 ■ 10239


● 1xGU10 R50, max 10W only LED

solid brass, plastic ABS

■ 10237

● 1xGU10 R50, max 10W only LED

CTLS MONO 10239



CAMELEON ADAPTER CTLS



plastic

■ 8281 □ 8282

CAMELEON ADAPTER CTLS
8281



CTLS SNOWBALL
11295

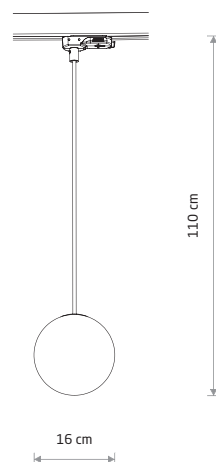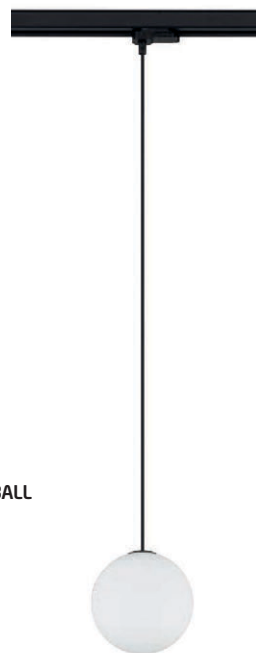

CTLS SNOWBALL

plastic PC, glass, painted steel

■ 11295


● 1xG9, max 12W only LED

● BULB LED G9, 4W

□ 7503 3000K □ 7504 4000K



CTLS - COMMERCIAL TRACK LIGHT SYSTEM, 3 CIRCUIT

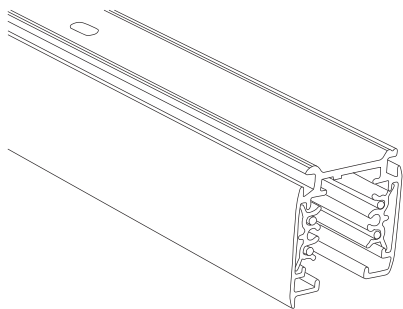





1 CTLS TRACK 3 CIRCUIT 1M

aluminum
8715 8714

2 CTLS TRACK 3 CIRCUIT 2M

aluminum
8717 8716

Schematy zasilania / Power supply circuit diagrams

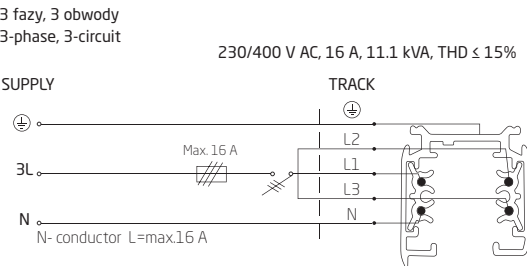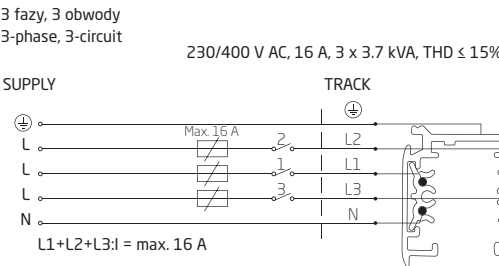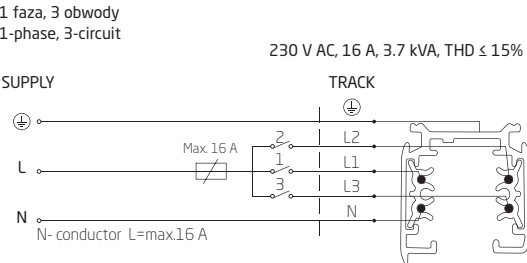



Maksymalna długość systemu szynoprzewodowego - 100 m.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
System szynoprzewodowy (CTLS) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.


Maximum length of track lights system - 100 m.
The recommended fastening distance is max. 1000 mm.
The track light system (CTLS) should be evenly electrically loaded and the fittings should be evenly placed along its length.

WHITE BLACK


Sposoby montażu / Installation methods

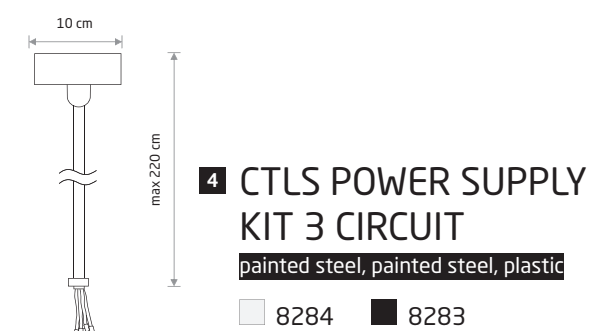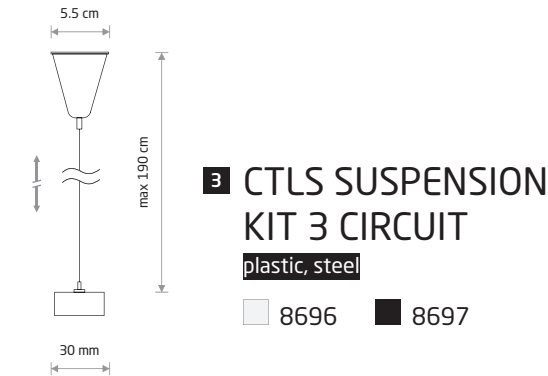

1. Zwieszenie na linkach
1. Suspended on steel wires


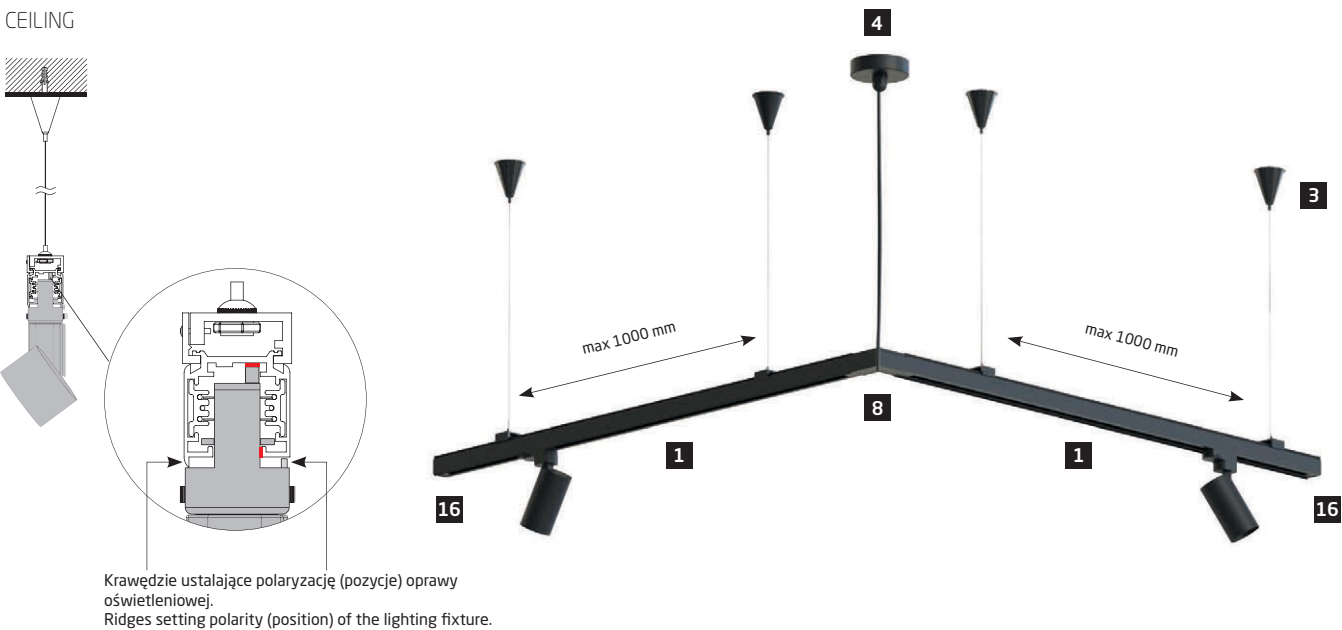


2. Montaż bezpośredni
2. Surface mounting

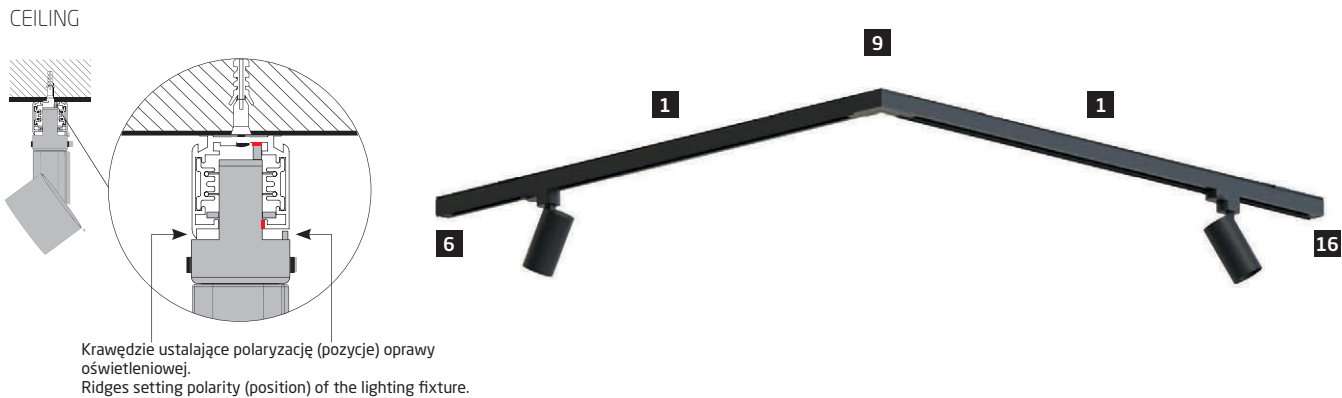

WHITE BLACK

CTLS - POLARITY IN COMMERCIAL TRACK LIGHT SYSTEM

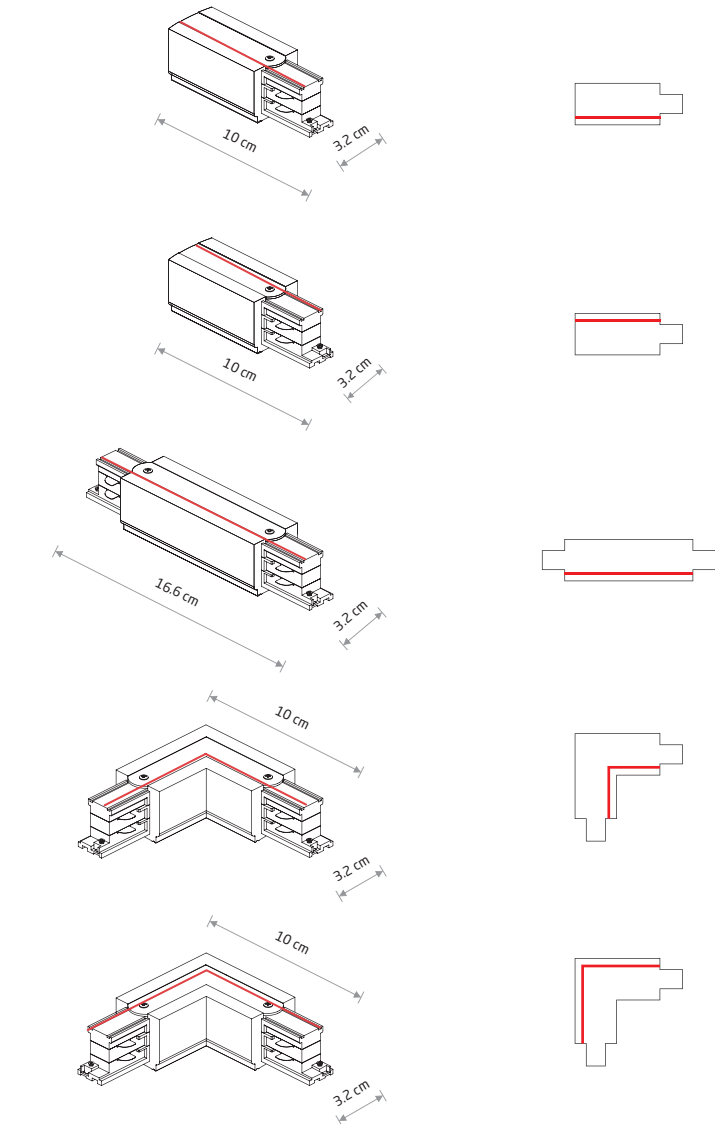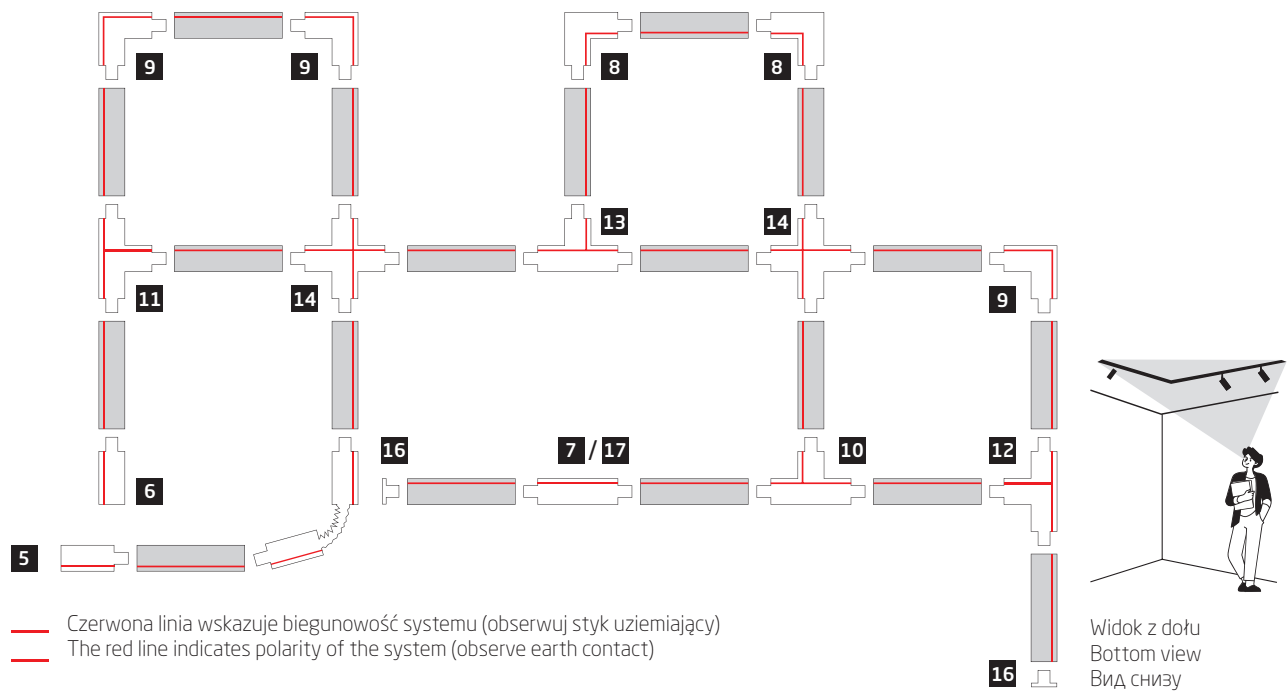


5 CTLS POWER END CAP, RIGHT (PE-R)
plastic, copper
8712 8713

6 CTLS POWER END CAP, LEFT (PE-L)
plastic, copper
8232 8233

7 CTLS POWER STRAIGHT CONNECTOR
plastic, copper
8707 8708

8 CTLS POWER L CONNECTOR, RIGHT (L-R)
plastic, copper
8227 8228


9 CTLS POWER L CONNECTOR, LEFT (L-L)
plastic, copper
8705 8706

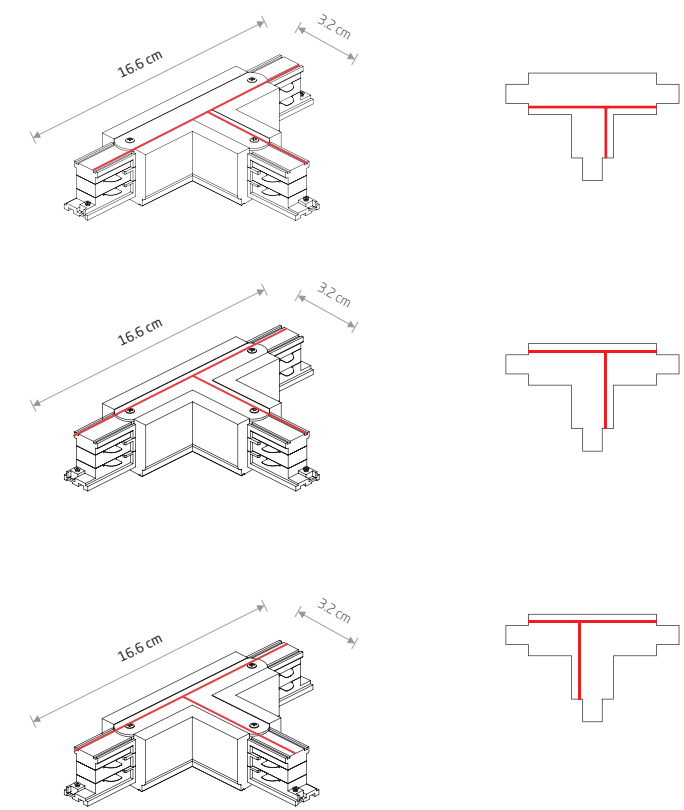

10 CTLS POWER T CONNECTOR, LEFT 2 (T-L2)
plastic, copper
8236 8237


11 CTLS POWER T CONNECTOR, LEFT 1 (T-L1)
plastic, copper
8243 8244

12 CTLS POWER T CONNECTOR, RIGHT 2 (T-R2)
plastic, copper
8703 8704

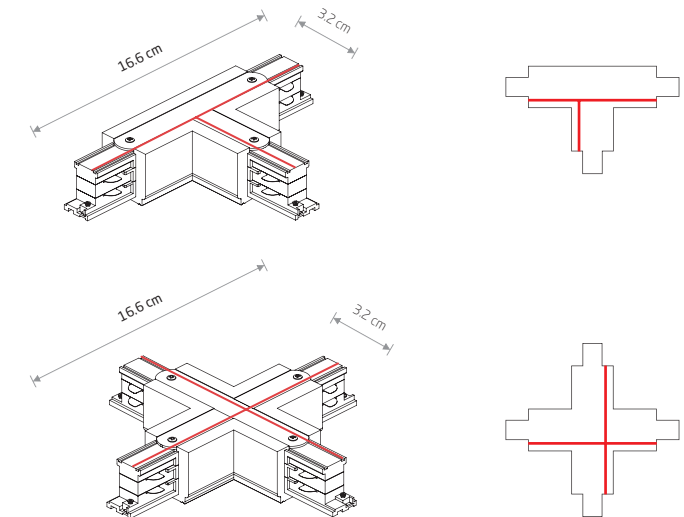

13 CTLS POWER T CONNECTOR, RIGHT 1 (T-R1)
plastic, copper
8241 8242


14 CTLS POWER X CONNECTOR
plastic, copper
8701 8702

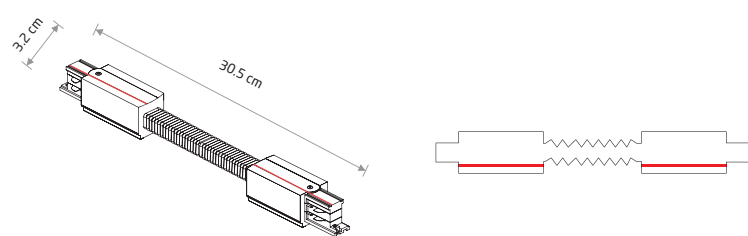

15 CTLS POWER FLEX CONNECTOR
plastic, copper
8698 8700

17 CTLS STRAIGHT CONNECTOR MINI
plastic, copper
8085 8084

CTLS - RECESSED COMMERCIAL TRACK LIGHT SYSTEM, 3 CIRCUIT



1 CTLS RECESSED TRACK 3 CIRCUIT 1M

aluminum





8693 8692

2 CTLS RECESSED TRACK 3 CIRCUIT 2M

aluminum

8695 8694

Schematy zasilania / Power supply circuit diagrams

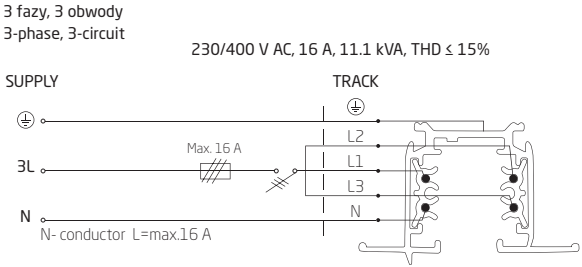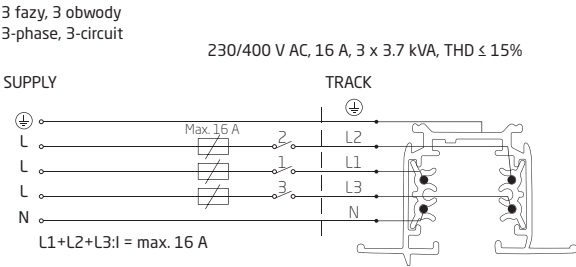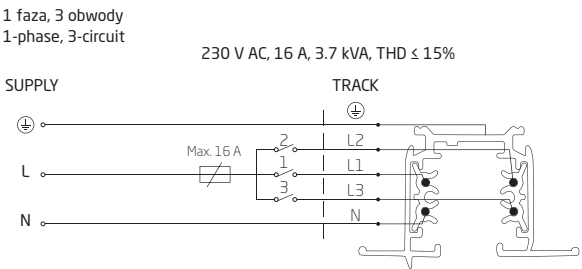



Maksymalna długość systemu szynoprzewodowego - 100 m.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
System szynoprzewodowy (CTLS) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.

Maximum length of track lights system - 100 m.
The recommended fastening distance is max. 1000 mm.
The track light system (CTLS) should be evenly electrically loaded and the fittings should be evenly placed along its length.

WHITE BLACK



Sposób montażu / Installation method

- 1. Montaż podtynkowy
- 1. Recessed mounting

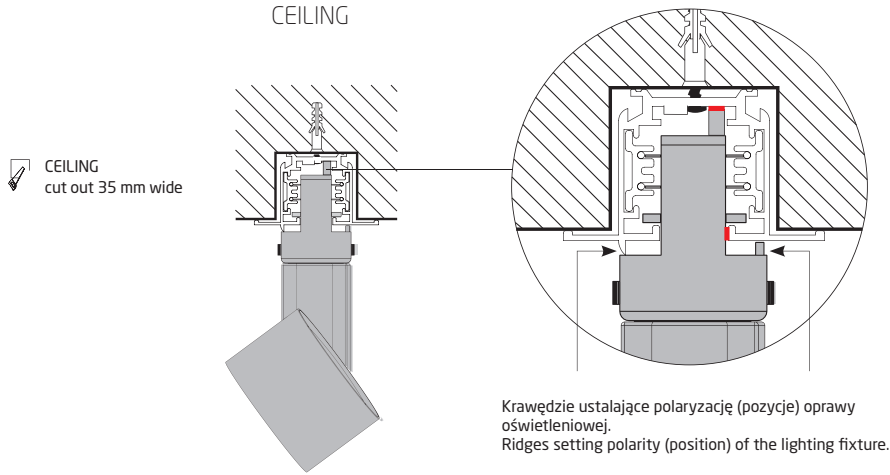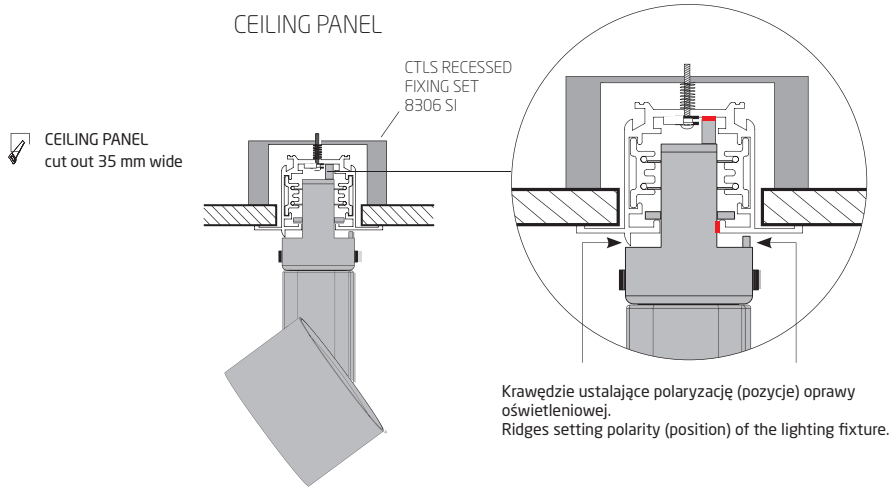


WHITE BLACK

CTLS - POLARITY IN RECESSED COMMERCIAL TRACK LIGHT SYSTEM

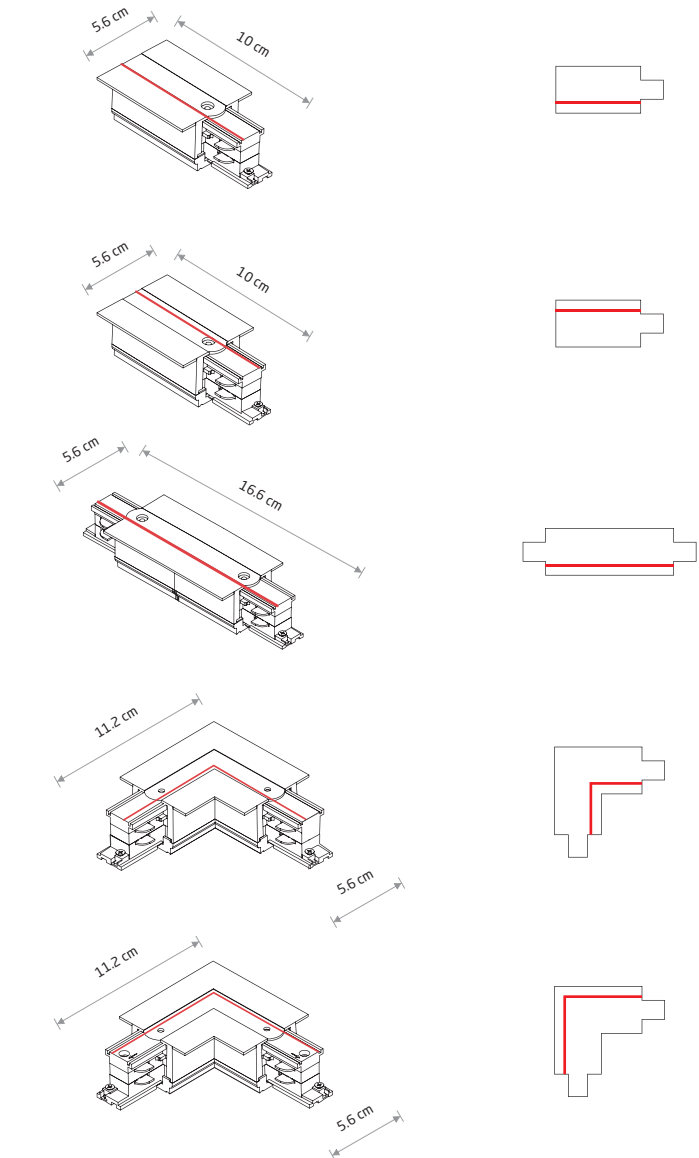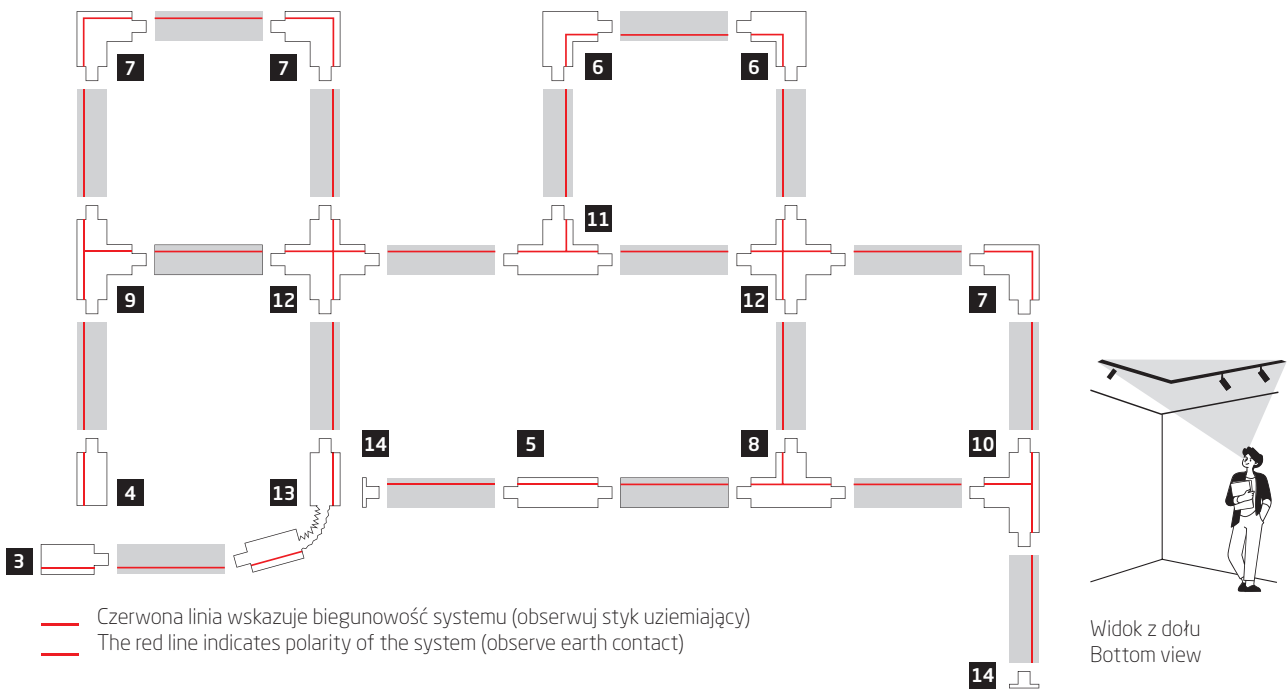

- 3 CTLS RECESSED POWER END CAP, RIGHT (PE-R)**
plastic, copper
8691 8690
- 4 CTLS RECESSED POWER END CAP, LEFT (PE-L)**
plastic, copper
8234 8235
- 5 CTLS RECESSED POWER STRAIGHT CONNECTOR**
plastic, copper
8686 8685
- 6 CTLS RECESSED POWER L CONNECTOR, RIGHT (L-R)**
plastic, copper
8230 8231
- 7 CTLS RECESSED POWER L CONNECTOR, LEFT (L-L)**
plastic, copper
8684 8683

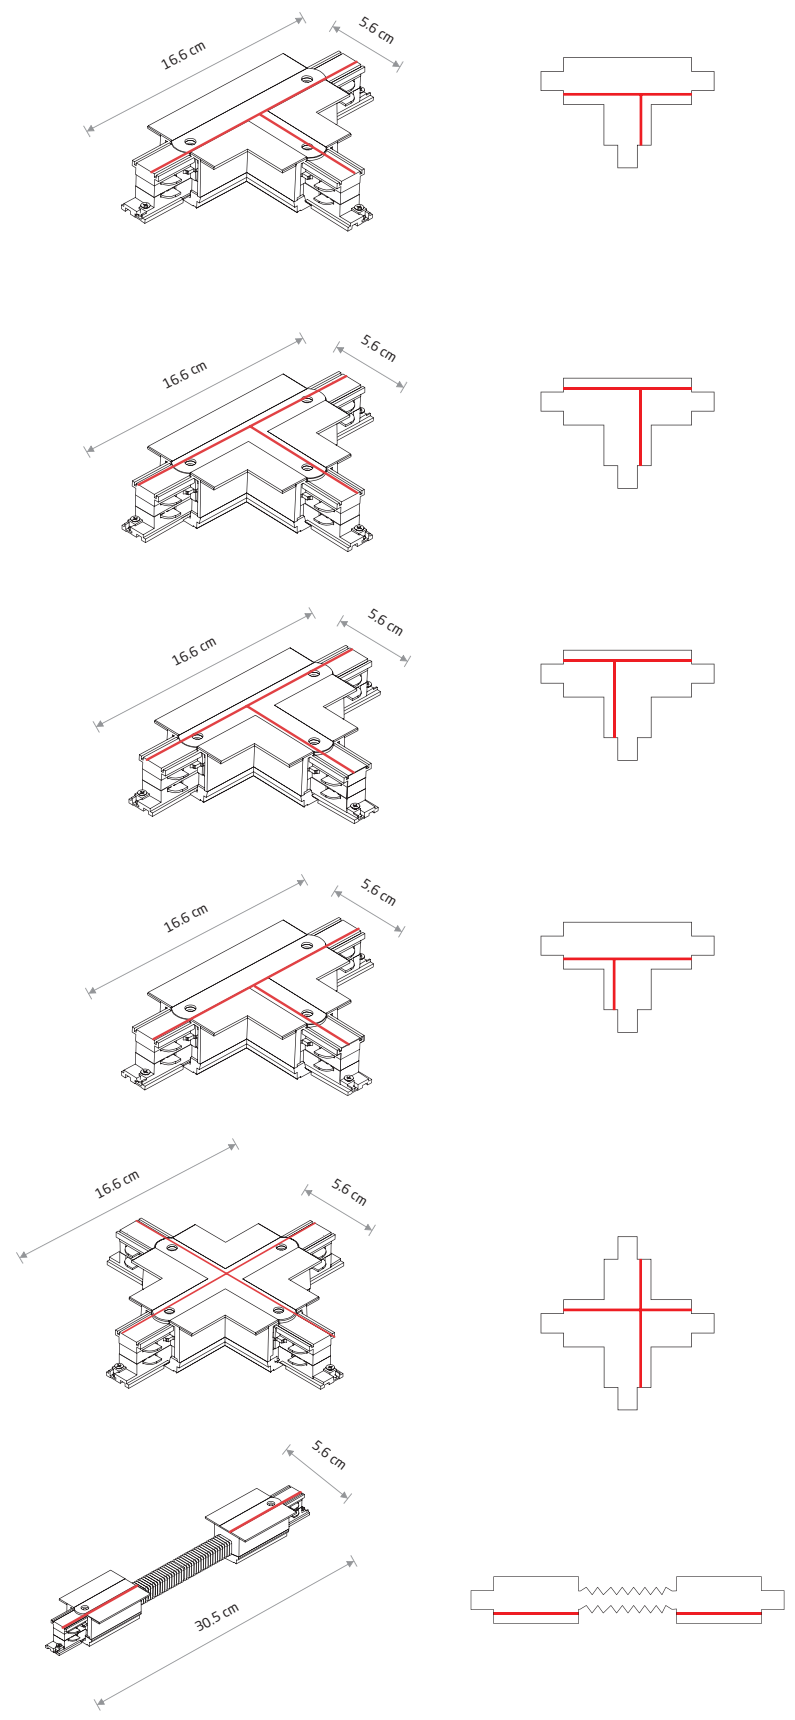

- 8 CTLS RECESSED POWER T CONNECTOR, LEFT 2 (T-L2)**
plastic, copper
8238 8240
- 9 CTLS RECESSED POWER T CONNECTOR, LEFT 1 (T-L1)**
plastic, copper
8247 8248
- 10 CTLS RECESSED POWER T CONNECTOR, RIGHT 2 (T-R2)**
plastic, copper
8681 8682
- 11 CTLS RECESSED POWER T CONNECTOR, RIGHT 1 (T-R1)**
plastic, copper
8245 8246
- 12 CTLS RECESSED POWER X CONNECTOR**
plastic, copper
8678 8680
- 13 CTLS RECESSED POWER FLEX CONNECTOR**
plastic, copper
8676 8677



- 14 CTLS RECESSED DEAD END CAP**
plastic
8688 8687
- 15 CTLS RECESSED FIXING SET**
steel
8306



Profile Track Light System



PROFILE TINOS LED 7W 10385







PROFILE TINOS LED 10W 10373



PROFILE TINOS LED 20W 10383



PROFILE TINOS LED 30W 10375

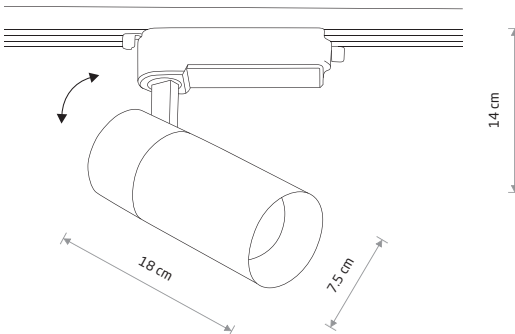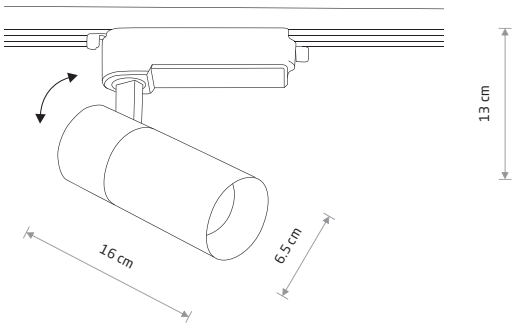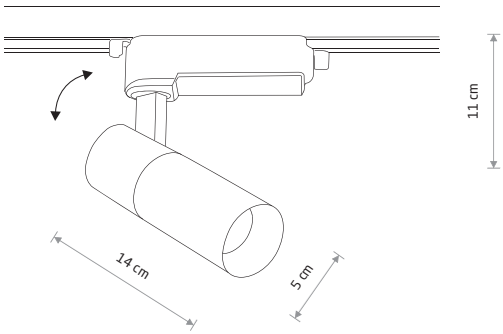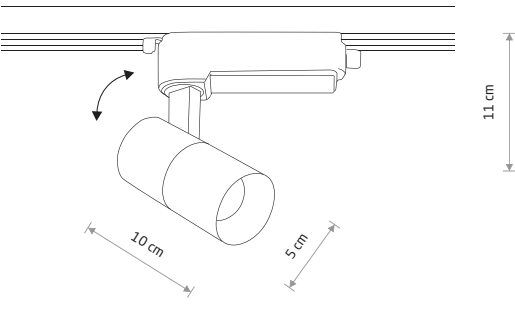

PROFILE TINOS LED 7W

painted aluminum, plastic

- 10372 3000K

10376 4000K
- 10381 3000K
- 10385 4000K



PROFILE TINOS LED 10W

painted aluminum, plastic

- 10373 3000K

10377 4000K
- 10382 3000K
- 10386 4000K



PROFILE TINOS LED 20W

painted aluminum, plastic

- 10374 3000K

10378 4000K
- 10383 3000K
- 10387 4000K



PROFILE TINOS LED 30W

painted aluminum, plastic

- 10375 3000K

10380 4000K
- 10384 3000K
- 10388 4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10372	7W LED	3000K	550 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10376	7W LED	4000K	570 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10381	7W LED	3000K	530 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10385	7W LED	4000K	550 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10373	10W LED	3000K	950 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10377	10W LED	4000K	1000 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10382	10W LED	3000K	880 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10386	10W LED	4000K	980 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10374	20W LED	3000K	1800 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10378	20W LED	4000K	2000 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10383	20W LED	3000K	1700 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10387	20W LED	4000K	1900 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10375	30W LED	3000K	2800 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10380	30W LED	4000K	3000 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10384	30W LED	3000K	2600 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h
10388	30W LED	4000K	2900 lm	36 °	>80	~220-230 V, 50/60 Hz		>0.9	IP20	30000h

WHITE


BLACK

WHITE

BLACK



PROFILE IRIS LED 7W 8996

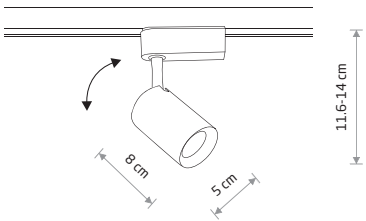

PROFILE IRIS LED 7W

painted aluminum, plastic PC

8995

3000K

8997

4000K

8996


3000K

8998

4000K



PROFILE IRIS LED 12W 9002



PROFILE IRIS LED 12W

painted aluminum, plastic PC

9000

3000K

9002

4000K

9001


3000K

9003

4000K



PROFILE IRIS LED 20W 9005

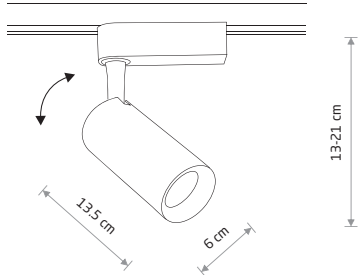

PROFILE IRIS LED 20W

painted aluminum, plastic PC

9004

3000K

9006

4000K

9005

3000K

9007

4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8995	7W LED	3000K	550 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8996	7W LED	3000K	530 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8997	7W LED	4000K	560 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8998	7W LED	4000K	550 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9000	12W LED	3000K	1000 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9001	12W LED	3000K	950 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9002	12W LED	4000K	1100 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9003	12W LED	4000K	1000 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9004	20W LED	3000K	1500 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9005	20W LED	3000K	1400 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9006	20W LED	4000K	1600 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9007	20W LED	4000K	1500 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h

WHITE


BLACK

WHITE

BLACK



PROFILE MIKE 7661



PROFILE MIKE

painted aluminum, plastic

- 7661


1xGU10 R50, max 15W only LED



PROFILE ZOOM LED 7625



PROFILE INDIA 7657




PROFILE INDIA

painted aluminum, plastic

- 7657

1xGU10 R50, max 15W only LED



PROFILE ZOOM LED

painted aluminum, plastic

- 7623

3000K

7624

4000K
- 7625

3000K

7626


4000K
-

BEAM CONE


BEAM ANGLE
15°



BEAM ANGLE
50°



PROFILE FOKUS 7621



PROFILE FOCUS LED

painted aluminum, plastic

- 7618

3000K

7620

4000K
- 7621

3000K


7622

4000K
-

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection
7618	10W LED	3000K	600 lm	36°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7620	10W LED	4000K	600 lm	36°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7621	10W LED	3000K	600 lm	36°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7622	10W LED	4000K	600 lm	36°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7623	9W LED	3000K	600 lm	15-50°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7624	9W LED	4000K	660 lm	15-50°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7625	9W LED	3000K	600 lm	15-50°	>90	~220-230 V, 50/60 Hz		>0.9	IP20
7626	9W LED	4000K	660 lm	15-50°	>90	~220-230 V, 50/60 Hz		>0.9	IP20



PROFILE EYE SUPER C 9244



PROFILE EYE SUPER C


painted steel, plastic PC

9245 9244

1xGU10 R50, max 10W only LED



PROFILE EYE SUPER A 9325

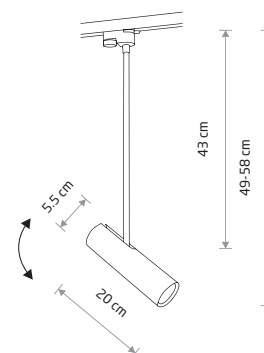

PROFILE EYE SUPER A


painted steel, plastic PC

9324 9325

1xGU10 R50, max 10W only LED



PROFILE SNOWBALL
11297

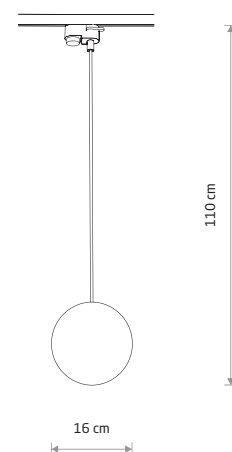

PROFILE SNOWBALL

plastic PC, glass, painted steel

11297

1xG9, max 12W only LED

BULB LED G9, 4W


7503 3000K 7504 4000K

PROFILE BIT PLUS

painted steel, plastic PC

9018

1xGU10 ES111, max 15W only LED




PROFILE BIT PLUS 9018

PROFILE BIT

painted steel, plastic PC

8823

1xGU10 ES111, max 15W only LED

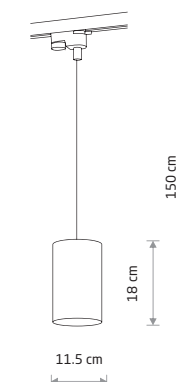


PROFILE BIT 8823

PROFILE EYE

painted steel, plastic PC

9337 9338


1xGU10 R50, max 10W only LED

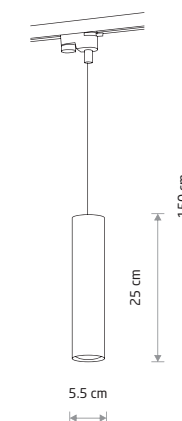

PROFILE EYE 9338



PROFILE EYE SPOT 9322



PROFILE EYE SPOT

painted steel, plastic PC, chrome

9321 9322

1xGU10 R50, max 10W only LED

PROFILE SNOWBALL


plastic PC, glass, painted steel

11298

1xG9, max 12W only LED

BULB LED G9, 4W


7503 3000K 7504 4000K



PROFILE SNOWBALL
11298



PROFILE MONO 7583



PROFILE MONO

painted steel, plastic ABS

7581 7582

7584 7585

1xGU10 R50, max 10W only LED

solid brass, painted steel, plastic ABS

7583


1xGU10 R50, max 10W only LED

PROFILE VESPA

painted steel, plastic PC, chrome

8824 8825


1xGU10 ES111, max 15W only LED



PROFILE VESPA 8825



PROFILE PUCK 10358



PROFILE PUCK

painted steel, plastic PC


10358

1xGX53, max 12W only LED

CAMELEON ADAPTER PROFILE

plastic


8360 8361



CAMELEON ADAPTER PROFILE
8360



PROFILE TRACK LIGHT SYSTEM

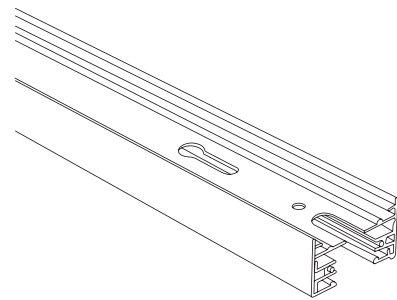


1 PROFILE TRACK 1 M

9450
 9448

2 PROFILE TRACK 2 M

9451
 9452

Schemat zasilania / Power supply circuit diagram

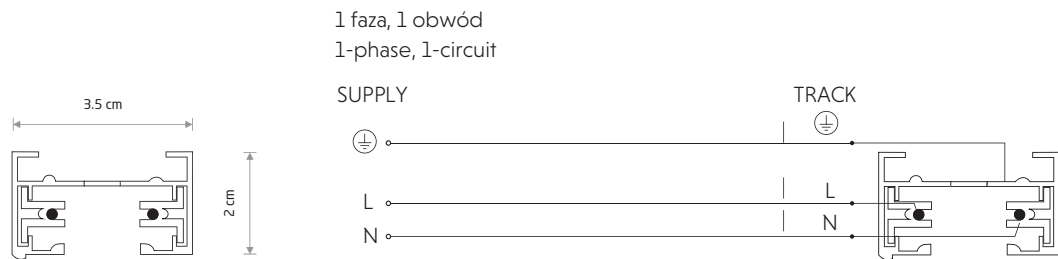


Zalecany dystans pomiędzy mocowaniami max. 1000 mm
 Maksymalna długość jednego obwodu systemu szynoprzewodowego PROFILE - 20 m, a maksymalne obciążenie elektryczne - 1500W
 System szynoprzewodowy należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.

The recommended fastening distance is max. 1000 mm
 The maximum length of one circuit of PROFILE track light system -20 m, and the maximum circuit power load - 1500W
 The track light system should be evenly electrically loaded and the fittings should be evenly placed along its length.


WHITE
 BLACK

Sposoby montażu / Installation methods



3 PROFILE POWER SUPPLY KIT


9237
 9238




4 PROFILE SUSPENSION KIT

9461
 9460

1. Zwieszenie na linkach stalowych
 1. Suspended on steel wires


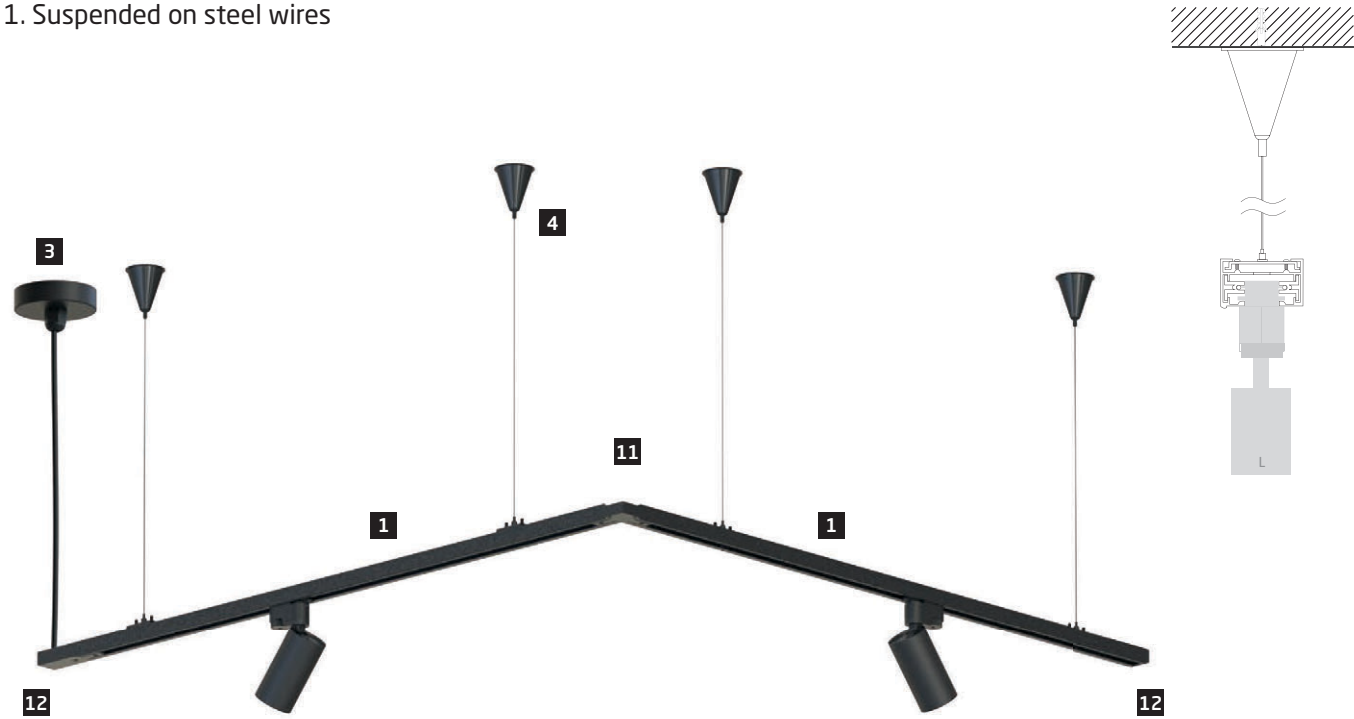


2. Montaż bezpośredni
 2. Surface mounting

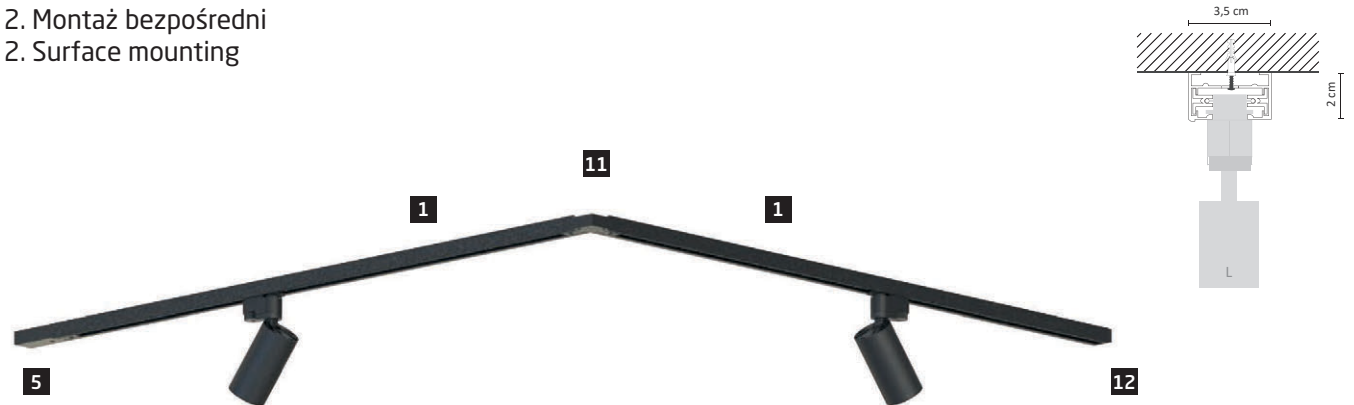

WHITE
 BLACK


PROFILE TRACK LIGHT SYSTEM

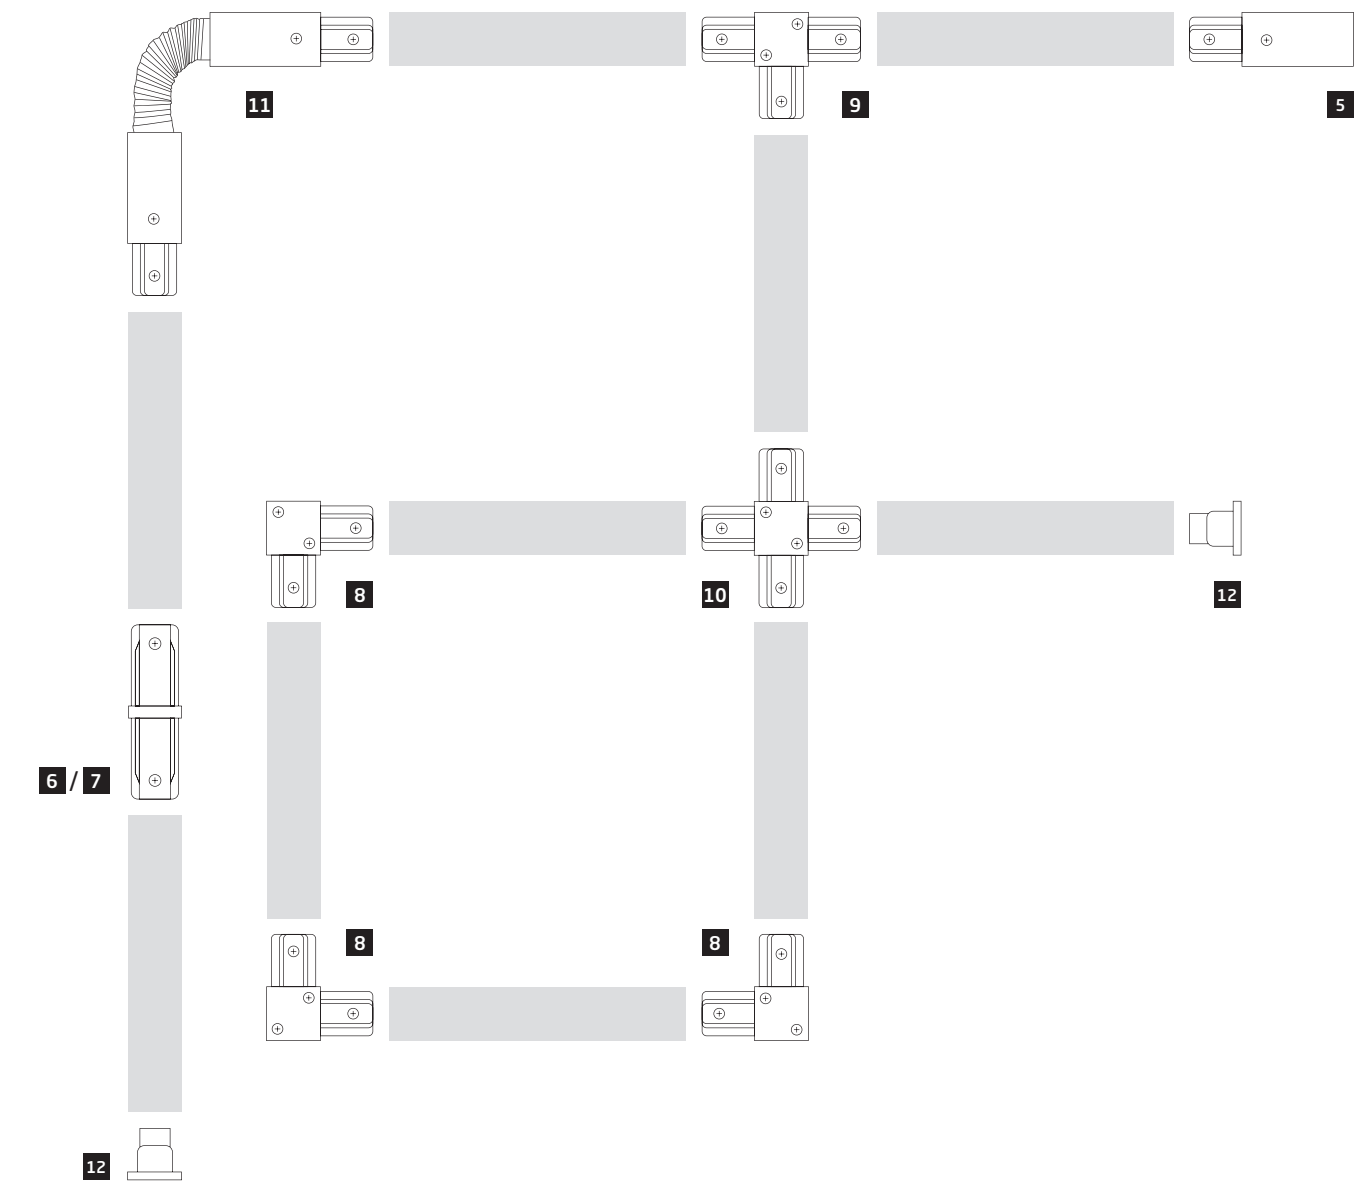

5 PROFILE POWER END CAP

plastic PC, steel, copper


9462 9463



6 PROFILE POWER STRAIGHT CONNECTOR

plastic PC, steel


10225 10226



7 PROFILE STRAIGHT CONNECTOR

plastic PC, steel, copper


9454 9453



8 PROFILE L CONNECTOR

plastic PC, steel, copper


9456 9455



9 PROFILE T CONNECTOR

plastic PC, steel, copper


9187 9186

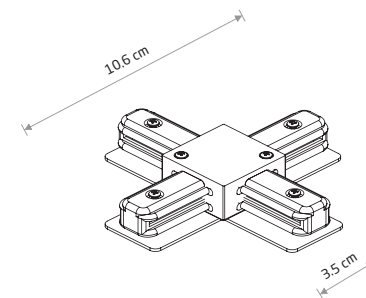

10 PROFILE X CONNECTOR

plastic PC, steel, copper


9190 9188

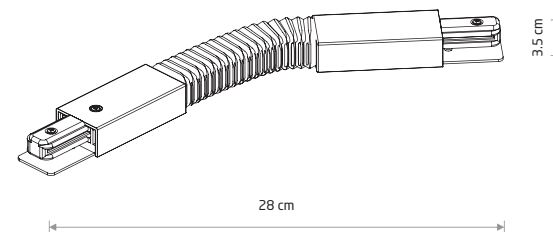

11 PROFILE FLEX CONNECTOR

plastic PC, steel, copper

8382 8383




12 PROFILE DEAD END CAP

plastic PC

9457 9458

PROFILE RECESSED TRACK LIGHT SYSTEM

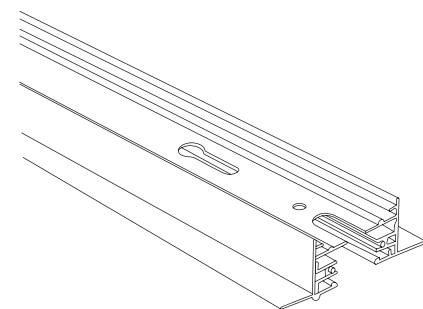

1 PROFILE RECESSED TRACK 1 METER

Painted aluminum


9012 9013

2 PROFILE RECESSED TRACK 2 METERS

Painted aluminum

9014 9015

Schemat zasilania / Power supply circuit diagram

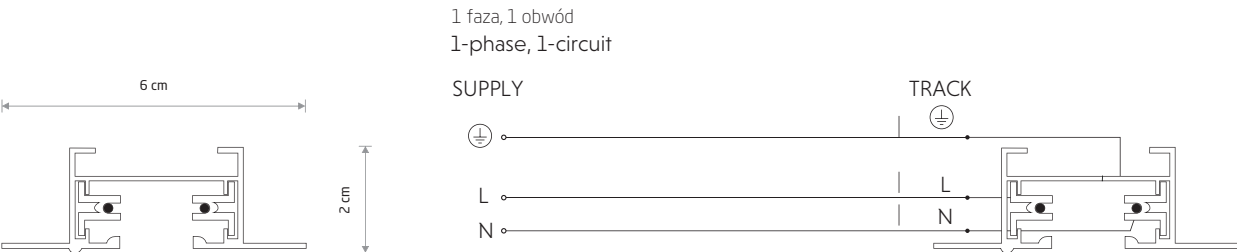


Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość jednego obwodu systemu szynoprzewodowego PROFILE - 20 m, a maksymalne obciążenie elektryczne - 1500W.
System szynoprzewodowy należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.

The recommended fastening distance is max. 1000 mm.
The maximum length of one circuit of track light system PROFILE -20 m, and the maximum circuit power load - 1500W.
The track light system should be evenly electrically loaded and the fittings should be evenly placed along its length.



WHITE BLACK

Sposób montażu / Installation method


- 1. Montaż podtynkowy
- 1. Recessed mounting

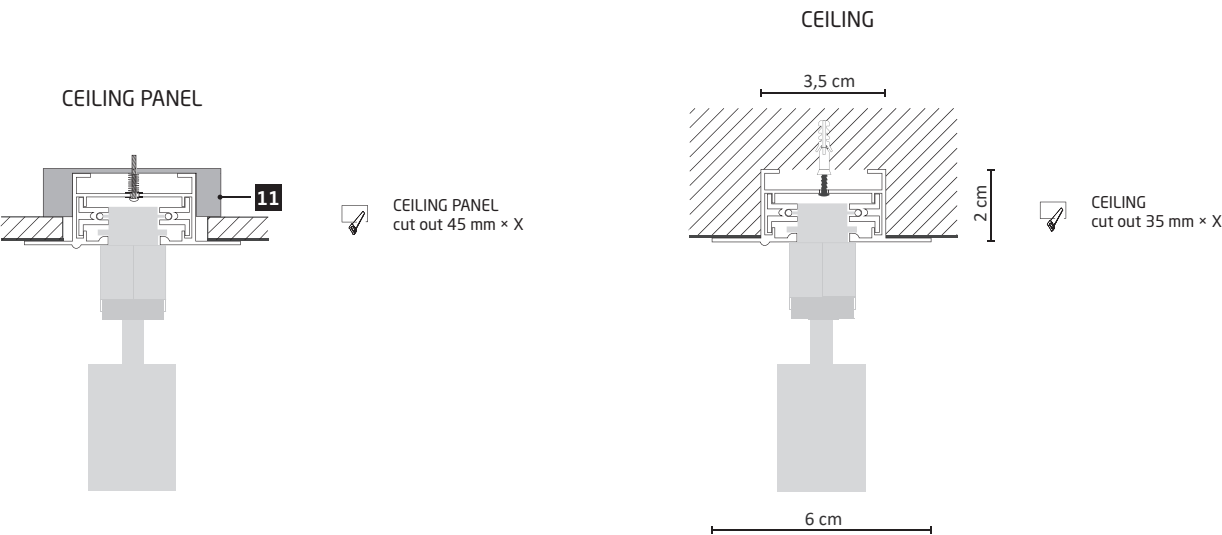


PROFILE RECESSED TRACK LIGHTS SYSTEM

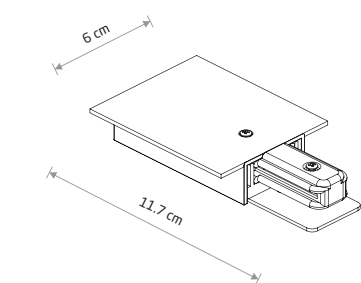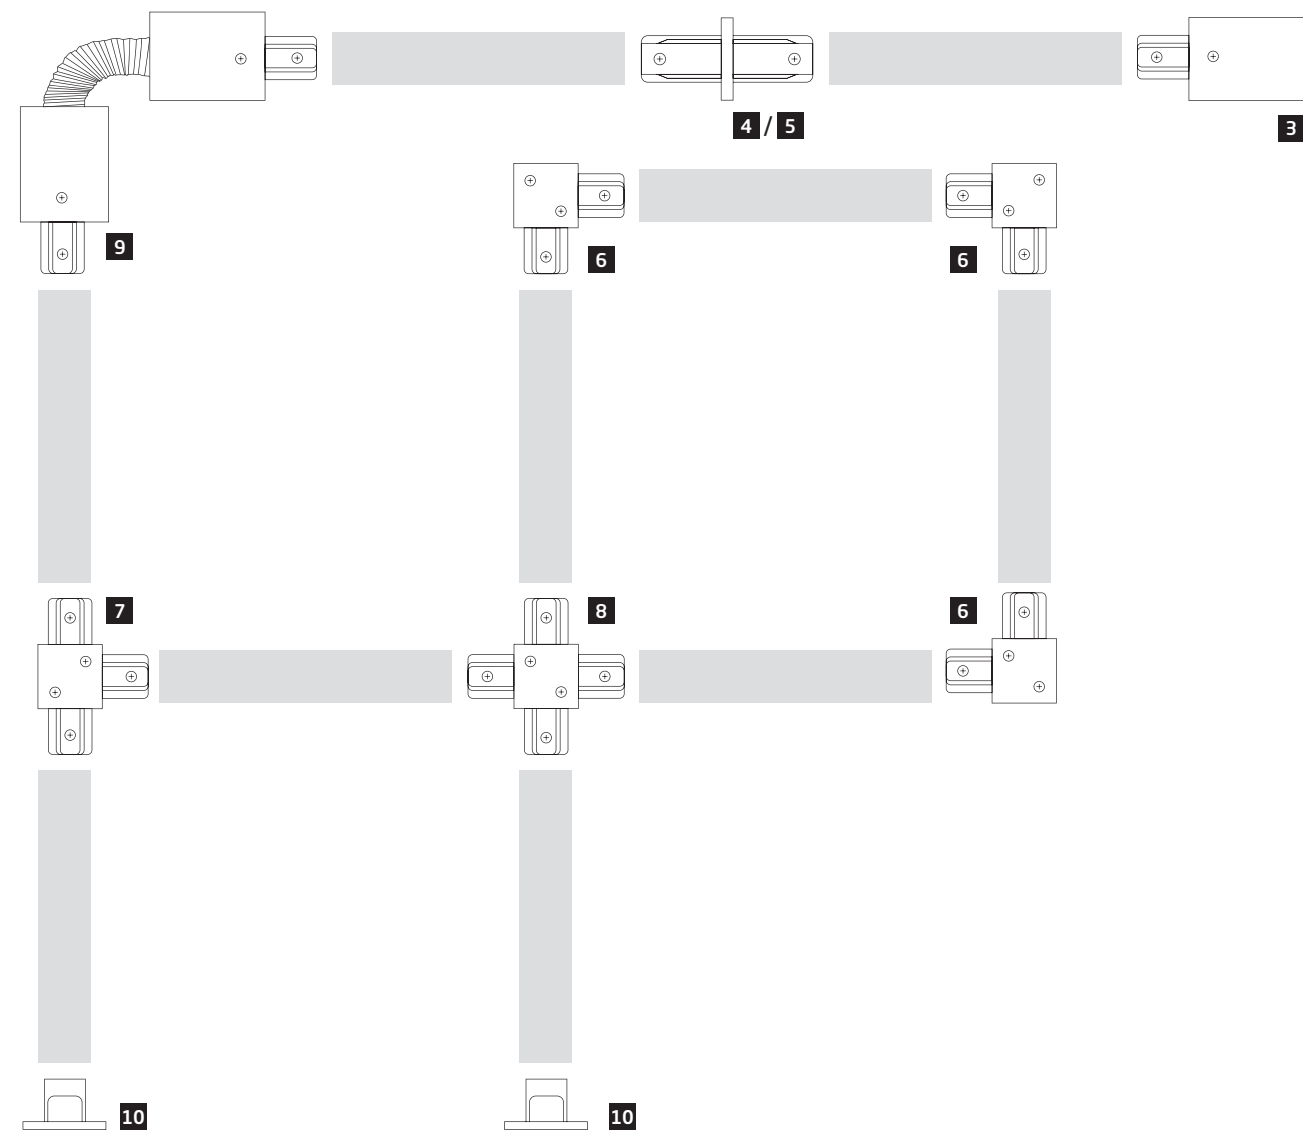

3 PROFILE RECESSED POWER END CAP
plastic PC, steel, copper
8972 8973

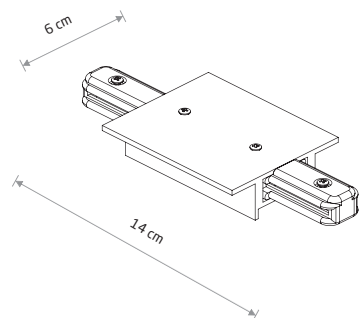

4 PROFILE RECESSED POWER STRAIGHT CONNECTOR
plastic PC, steel, copper
10227 10228

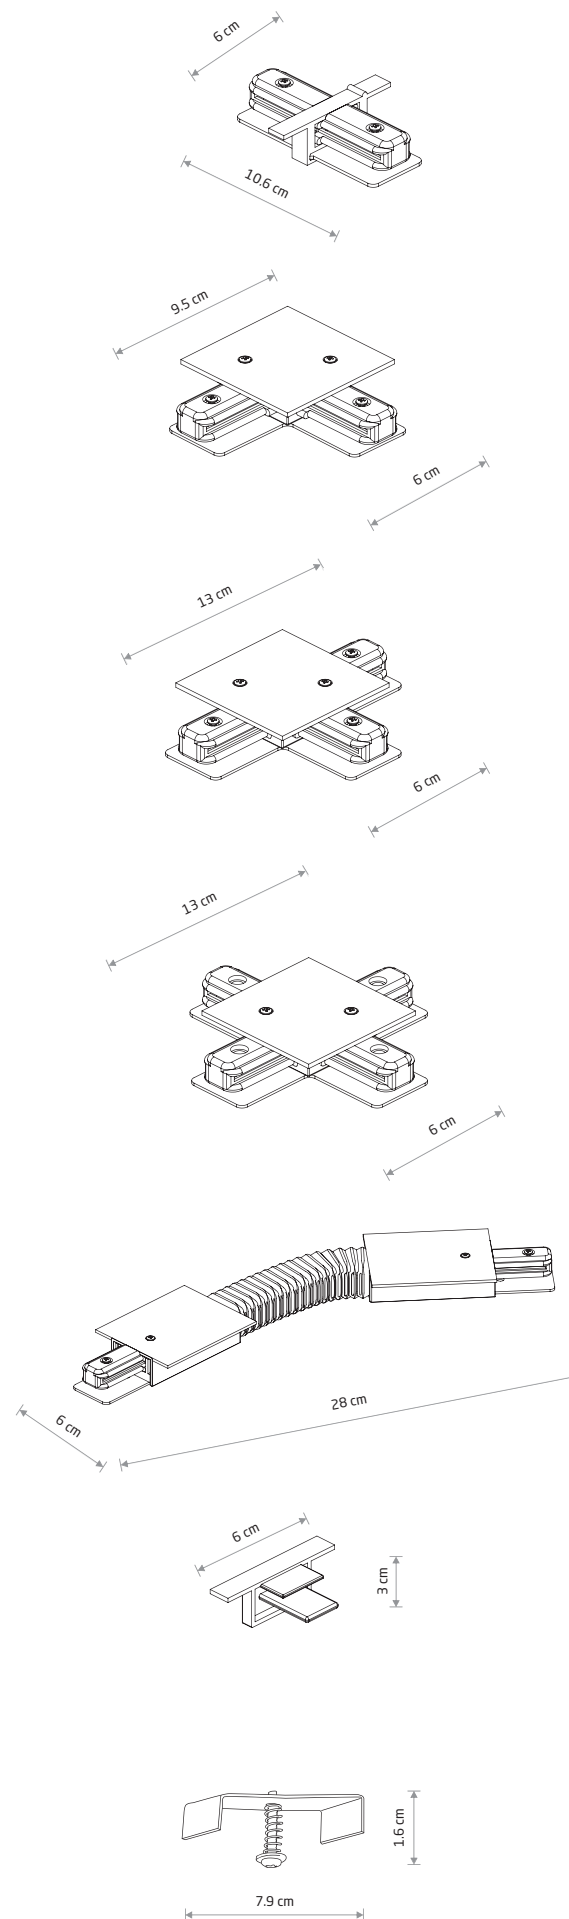

5 PROFILE RECESSED STRAIGHT CONNECTOR
plastic PC, steel, copper
8967 8968

6 PROFILE RECESSED L CONNECTOR
plastic PC, steel, copper
8970 8971

7 PROFILE RECESSED T CONNECTOR
plastic PC, steel, copper
8834 8835

8 PROFILE RECESSED X CONNECTOR
plastic PC, steel, copper
8836 8837

9 PROFILE RECESSED FLEX CONNECTOR
plastic PC, steel, copper
8384 8385

10 PROFILE RECESSED DEAD END CAP
plastic PC
8974 8975


11 PROFILE RECESSED FIXING SET
steel
8805



Bathroom lighting



ICE BALL 8126



ICE BALL

brass-plated steel, glass

8126

1xG9, max 10W only LED

IP44


ARALIA

brass-plated steel, glass

10527

1xG9, max 10W only LED


IP44

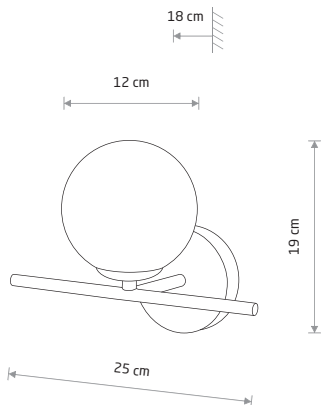

ARALIA 10527



ALOE 10525



ALOE

brass-plated steel, glass

10525

1xG9, max 10W only LED

IP44


AGAVE

brass-plated steel, glass

10526

1xG9, max 10W only LED

IP44

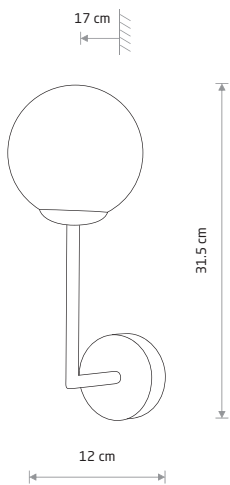

AGAVE 10526



NATALIE 10727



NATALIE 10727




NATALIE 10726



NATALIE 10724



NATALIE 10723

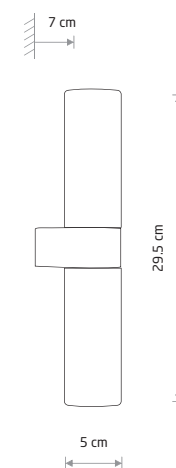


NATALIE

aluminum, glass

10726 10727 10728

2xG9, max 10W only LED

IP44



NATALIE

aluminum, glass

10723 10724 10725

1xG9, max 10W only LED


IP44



ICE TUBE LED S 8121



ICE TUBE LED M 8122




8.3 cm
4 cm
30 cm

ICE TUBE LED S

plastic PC, chrome plated steel

 8121





8.3 cm
4 cm
50 cm

ICE TUBE LED M

plastic PC, chrome plated steel

 8122






ICE TUBE LED S 8118



ICE TUBE LED M 8120




8.5 cm
4 cm
60 cm

ICE TUBE LED S

plastic PC, chrome plated steel

 8118





8.5 cm
4 cm
90 cm

ICE TUBE LED M

plastic PC, chrome plated steel

 8120




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8121	5W LED	4000K	430 lm	120°	≥80	~220-230 V, 50/60 Hz		>0.5	IP44	30000h
8122	8W LED	4000K	700 lm	120°	≥80	~220-230 V, 50/60 Hz		>0.5	IP44	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8118	12W LED	4000K	1200 lm	120°	≥80	~220-230 V, 50/60 Hz		>0.5	IP44	30000h
8120	18W LED	4000K	1750 lm	120°	≥80	~220-230 V, 50/60 Hz		>0.5	IP44	30000h



BRAZOS 6948



BRAZOS

glass, chrome plated steel


6948

1xG9, max 10W only LED

IP44



BRAZOS 6950

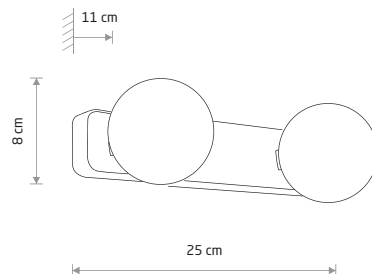


BRAZOS

glass, chrome plated steel


6950

2xG9, max 10W only LED

IP44

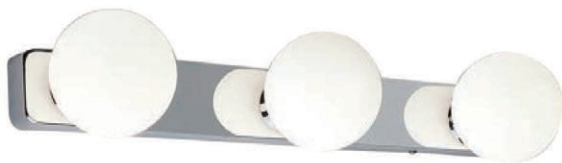

BRAZOS 6951

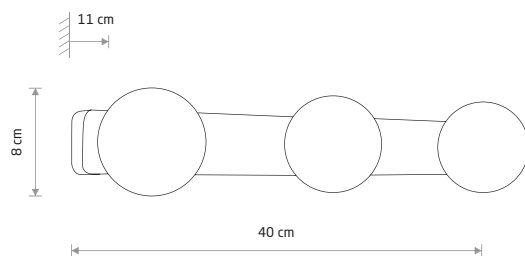


BRAZOS

glass, chrome plated steel

6951

3xG9, max 10W only LED

IP44

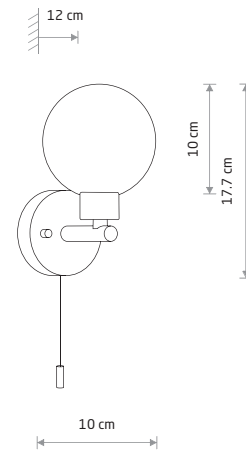

SIMI

painted steel, glass


8052

1xG9, max 10W only LED

IP44



SIMI 8052



BRAZOS

painted steel, glass


8057

1xG9, max 10W only LED

IP44



BRAZOS 8057

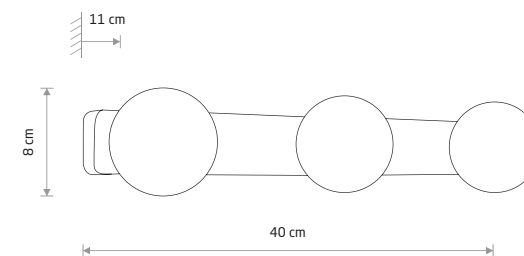

BRAZOS

glass, painted steel

8056

3xG9, max 10W only LED


IP44



BRAZOS 8056



ICE EGG A 8124

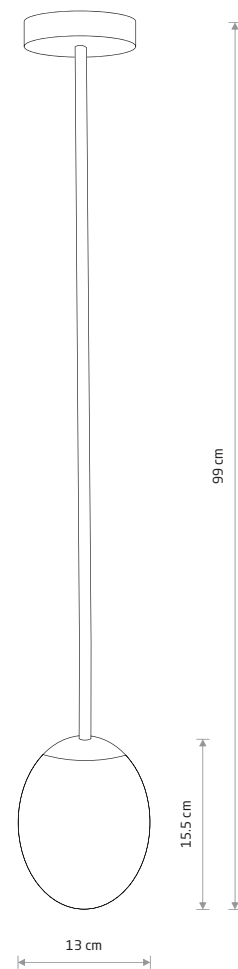

ICE EGG A


■ painted steel, glass

■ 8124

- 1xG9, max 10W only LED
- IP44



ICE EGG C 8132



ICE EGG C


■ painted aluminum, glass

■ 8132

- 1xG9, max 10W only LED
- IP44



SIS 8054



SIS


■ glass, painted steel

■ 8054

- 1xG9, max 10W only LED
- IP44



CAYO 9505



CAYO

■ glass, painted steel

■ 8055

- 1xG9, max 10W only LED
- IP44

9505

■ glass, chrome plated steel

■ 9505


- 1xG9, max 10W only LED
- IP44



VISTA 8051




VISTA 8050

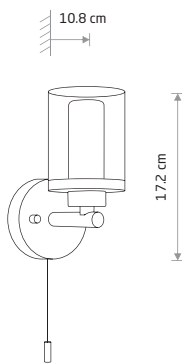

VISTA
chrome plated steel, glass
8051

1xG9, max 10W only LED
IP44

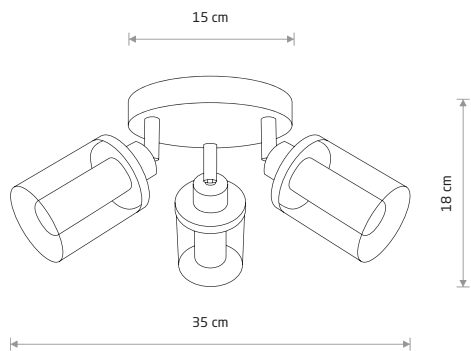


VISTA
chrome plated steel, glass
8050

3xG9, max 10W only LED
IP44




MALAKKA LED 9501

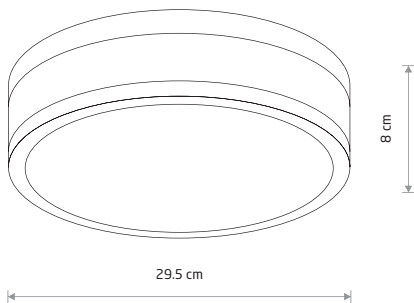


MALAKKA LED
chrome plated steel, glass
9501



PAN LED S 8173

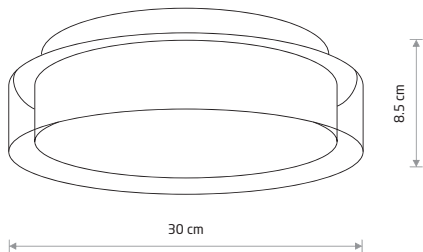

PAN LED S
glass, chrome plated steel
8173

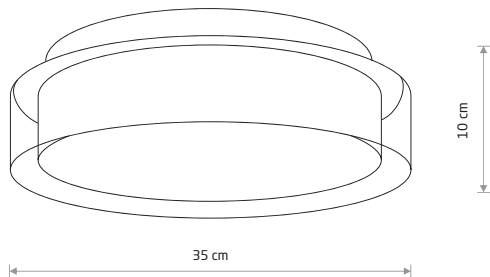


PAN LED M
glass, chrome plated steel
8174

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9501	18W LED	4000K	940 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h
8173	12W LED	4000K	770 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h
8174	17W LED	4000K	1000 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h



TORCH 8123

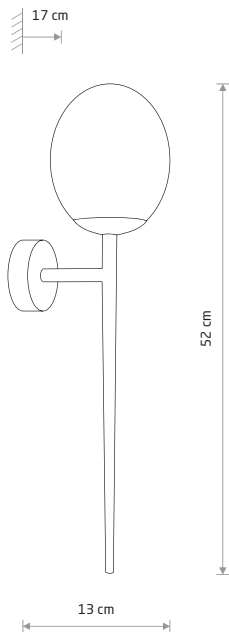

TORCH

chrome plated steel, glass


8123

1xG9, max 10W only LED

IP44



CEARA 10713



CEARA


aluminum

10713 10714

10715 10716

1xGU10 R50, max 15W only LED

IP44

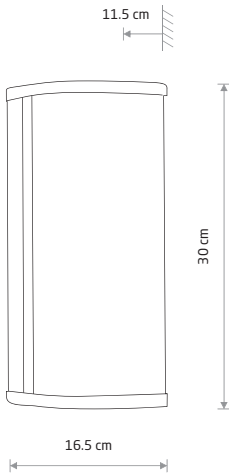

PALMAS LED

aluminum, glass, plastic PC

10729 10730



PALMAS LED 10729


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10729	15W LED	4000K	1000 lm	130 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
10730	15W LED	4000K	1000 lm	130 °	>90	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h



PARANA 10719



PARANA 10718



PARANA
aluminum

10717 10718

10719 10720

1xGU10 R50, max 15W only LED


IP44



BRAVO 8364



BRAVO 8365




BRAVO
painted aluminum, glass

8364 8365

1xGU10 R50, max 15W only LED

IP54



BOL
painted aluminum


10483 10484

1xGX53, max 12W only LED

IP54



BOL 10483



MAUN
painted aluminum


10481 10482

1xGX53, max 12W only LED

IP54



MAUN 10481



ALPHA
painted aluminum, glass

8362 8363

1xGU10 R50, max 15W only LED

IP54



ALPHA 8362




ZESTAW ZAWIERA 4 KOLOROWE NAKŁADKI.
THE SET INCLUDES FOUR COLOURED RINGS.



FOXTROT 8373




FOXTROT 8374

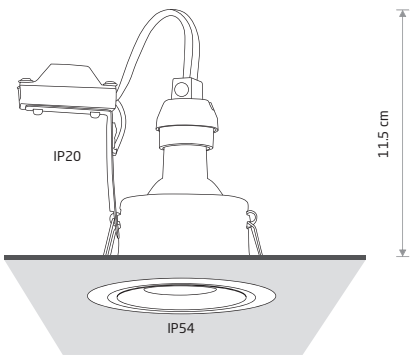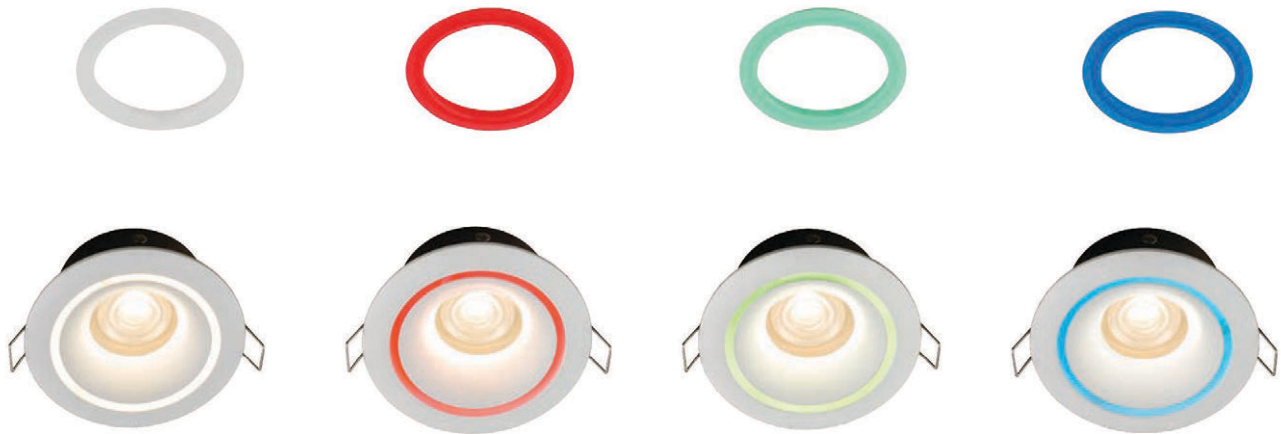



FOXTROT
painted aluminum, glass
8373 8374

- 1xGU10 R50, max 15W only LED
- cut out $\varnothing$ 85 mm
- IP54/20

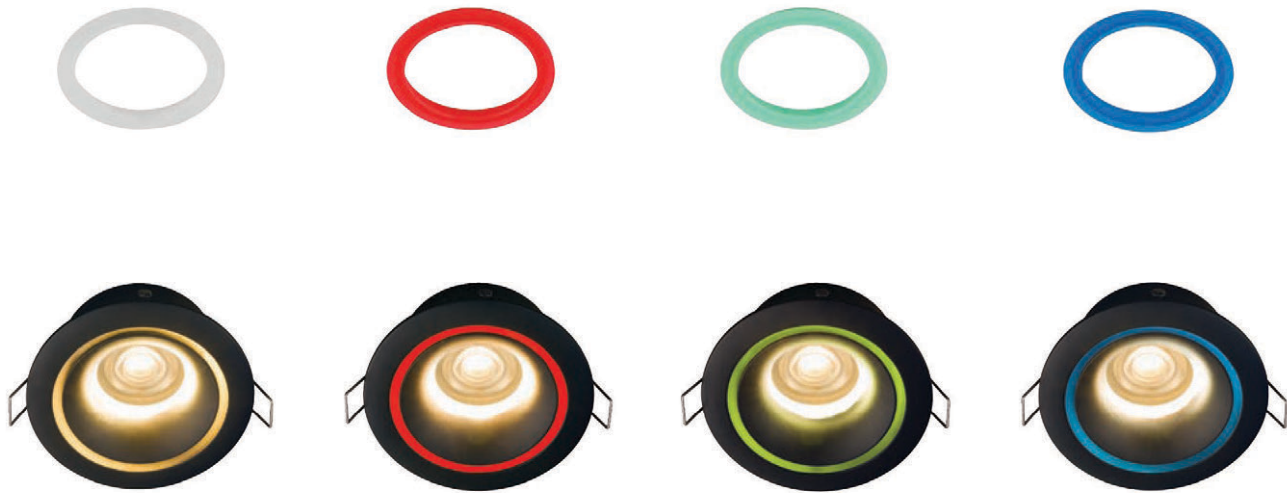



CHARLIE 8367

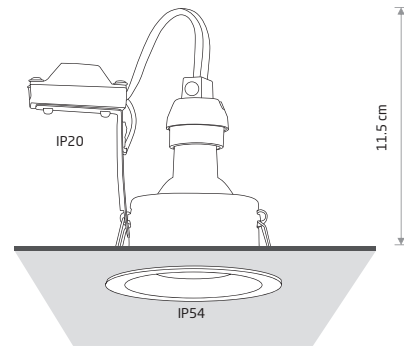

CHARLIE 8366

CHARLIE

painting aluminum, glass

8366 8367

1xGU10 R50, max 15W only LED

cut out ø 75 mm

IP54/20



GOLF 8376



GOLF 8375

GOLF


painting aluminum, glass

8375 8376



1xGU10 R50, max 15W only LED

cut out ø 68 mm

IP54/20

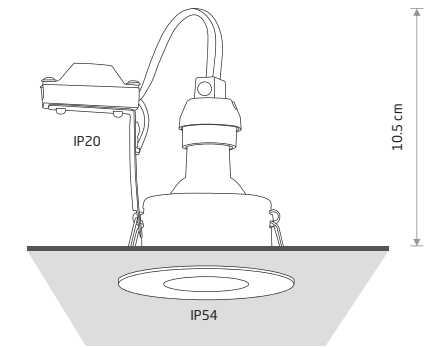

DELTA 8370

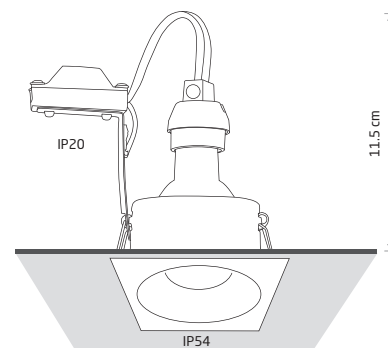

DELTA 8368

DELTA

painting aluminum, glass

8368 8370


1xGU10 R50, max 15W only LED

cut out ø 75 mm


IP54/20



ECHO 8372



ECHO 8371

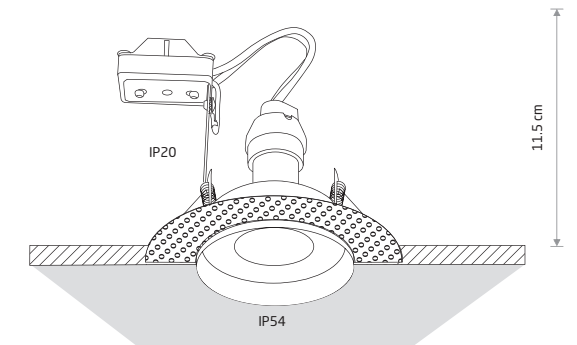

ECHO

painting aluminum, glass

8371 8372


1xGU10 R50, max 15W only LED

cut out ø 80 mm

IP54/20



JULIET 7663




JULIET
steel

7663 7664

- 1xGU10 R50, max 15W only LED
- cut out ø 56 mm
- IP54/20



JULIET 7664



ACRE
aluminum, glass

10711


- 1xGU10 R50, max 15W only LED
- cut out ø 75 mm
- IP44/20



ACRE 10711




HELIOS LED 8992



HELIOS LED
plastic PC

8991 3000K 8992 4000K

- cut out ø 85 mm



BAHIA
aluminum, glass


10712

- 1xGU10 R50, max 15W only LED
- cut out ø 75 mm
- IP44/20




BAHIA 10712

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8991	5W LED	3000K	300 lm	100°	≥ 80	~220-230 V, 50/60 Hz		>0.5	IP44/20	20000h
8992	5W LED	4000K	300 lm	100°	≥ 80	~220-230 V, 50/60 Hz		>0.5	IP44/20	20000h

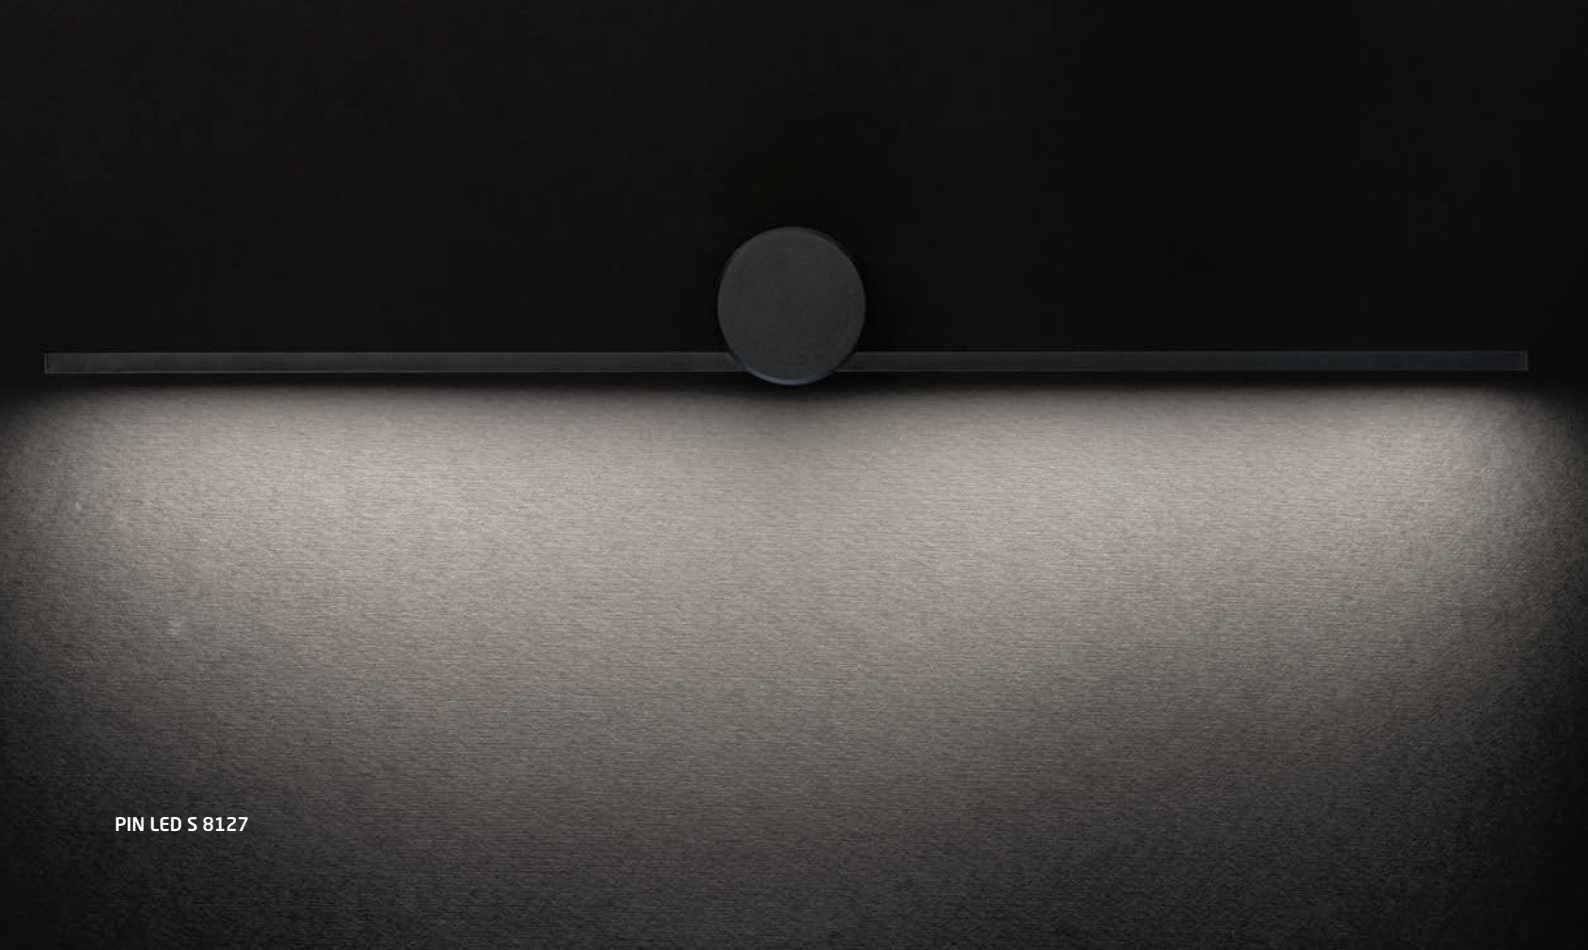


PIN LED S 8127

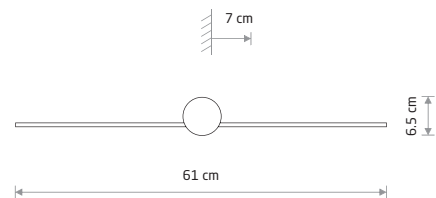

PIN LED S

painted aluminum, plastic PC


8127

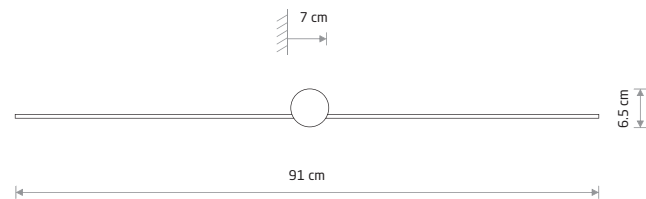

PIN LED M

painted aluminum, plastic PC

8128

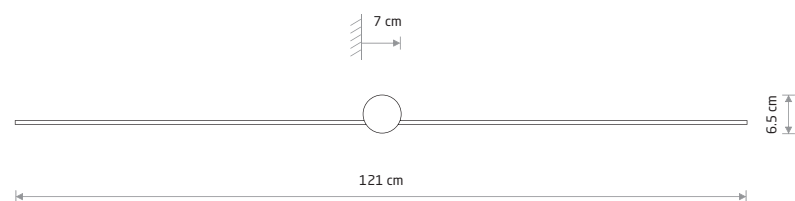

PIN LED L

painted aluminum, plastic PC

8130



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8127	6W LED	4000K	280 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.9	IP44	30000h
8128	10W LED	4000K	500 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.9	IP44	30000h
8130	15W LED	4000K	700 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.9	IP44	30000h


BLACK



PICASSO LED

chrome plated aluminum, plastic PC

8131

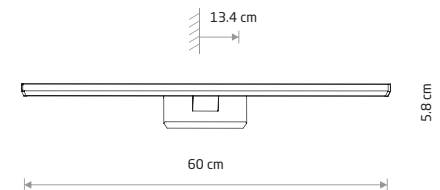


LATH LED 8175

LATH LED

chrome plated steel, plastic PC

8175

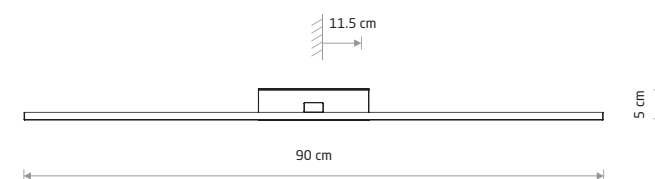

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8131	12W LED	4000K	900 lm	120 °	≥80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	30000h
8175	16W LED	4000K	1000 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	20000h

CHROME

Sposoby montażu / Installation methods




1. Na lustrze
1. On the mirror

2. Na szafce łazienkowej
2. On the bathroom cabinet

3. Na ścianie
3. On the wall

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10665	8W LED	3000K	600 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10668	8W LED	3000K	550 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10672	8W LED	3000K	600 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10676	8W LED	4000K	600 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10680	8W LED	4000K	650 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10683	8W LED	4000K	650 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10666	12W LED	3000K	900 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10670	12W LED	3000K	850 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10673	12W LED	3000K	900 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10681	12W LED	4000K	950 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10684	12W LED	4000K	950 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10677	12W LED	4000K	900 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h

CHROME BLACK WHITE

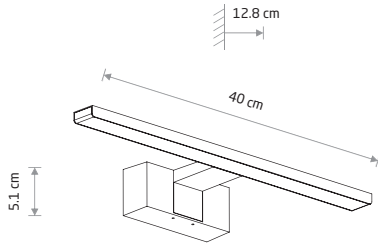


CEZANNE LED S
painted aluminum, plastic ABS, plastic PMMA

10668 3000K 10676 4000K

10665 3000K 10680 4000K

10672 3000K 10683 4000K

☐

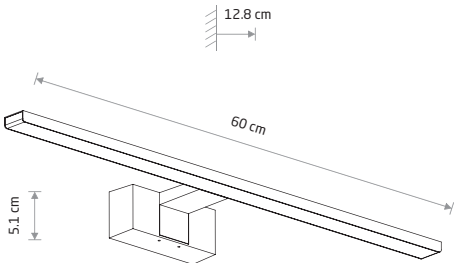


CEZANNE LED M
painted aluminum, plastic ABS, plastic PMMA

10670 3000K 10677 4000K

10666 3000K 10681 4000K

10673 3000K 10684 4000K

☐

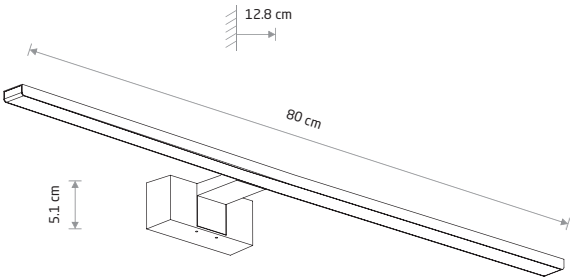

CEZANNE LED L
painted aluminum, plastic ABS, plastic PMMA

10671 3000K 10678 4000K

10667 3000K 10682 4000K

10674 3000K 10685 4000K




☐

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10667	15W LED	3000K	1100 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10671	15W LED	3000K	1050 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10674	15W LED	3000K	1100 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10678	15W LED	4000K	1100 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10682	15W LED	4000K	1200 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h
10685	15W LED	4000K	1200 lm	120°	≥ 80	~220-230 V, 50/60 Hz	☐	>0.5	IP44	25000h

CHROME BLACK WHITE



AGNES ROUND LED PRO
10980

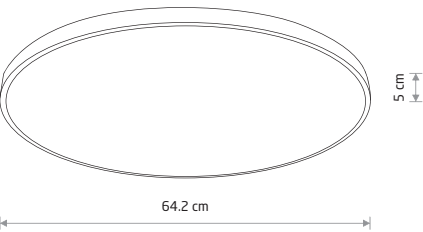

AGNES ROUND LED PRO
painted steel, plastic PMMA

- 10977

3000K
- 10978

4000K
- 10971

3000K
- 10972

4000K



AGNES ROUND LED PRO
painted steel, plastic PMMA

- 10979

3000K
- 10980

4000K
- 10973

3000K
- 10974

4000K



AGNES ROUND LED PRO
painted steel, plastic PMMA

- 10981

3000K
- 10982

4000K
- 10975

3000K
- 10976

4000K






Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10971	22W LED	3000K	1600 lm	120 °	>80	~220-230 V, 50-60Hz Hz	⊕	IP44	40000h
10972	22W LED	4000K	1800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10973	32W LED	3000K	2600 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10974	32W LED	4000K	2700 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10975	64W LED	3000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10976	64W LED	4000K	5900 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10977	22W LED	3000K	1800 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10978	22W LED	4000K	2000 lm	120 °	>80	~220-230 V, 50-60 Hz	⊕	IP44	40000h
10979	32W LED	3000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10980	32W LED	4000K	3000 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10981	64W LED	3000K	5800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10982	64W LED	4000K	6200 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h

WHITE BLACK



AGNES SQUARE LED PRO
10987

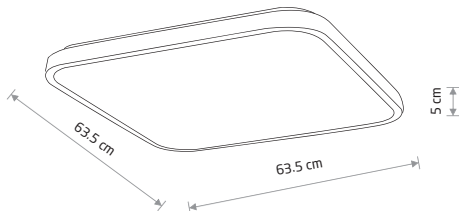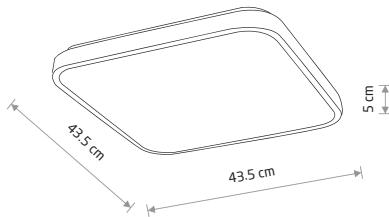

AGNES SQUARE LED PRO
painted steel, plastic PMMA

- 10989

3000K
- 10990

4000K
- 10983

3000K
- 10984

4000K



AGNES SQUARE LED PRO
painted steel, plastic PMMA

- 10991

3000K
- 10992

4000K
- 10985

3000K
- 10986

4000K



AGNES SQUARE LED PRO
painted steel, plastic PMMA

- 10993

3000K
- 10994

4000K
- 10987

3000K
- 10988

4000K



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
10983	16W LED	3000K	1200 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10984	16W LED	4000K	1300 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10985	32W LED	3000K	2700 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10986	32W LED	4000K	2800 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10987	64W LED	3000K	5600 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10988	64W LED	4000K	6000 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10989	16W LED	3000K	1400 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10990	16W LED	4000K	1500 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10991	32W LED	3000K	2900 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10992	32W LED	4000K	3100 lm	120 °	>80	~220-230 V, 50/60Hz Hz	⊕	IP44	40000h
10993	64W LED	3000K	6100 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h
10994	64W LED	4000K	6500 lm	120 °	>80	~220-230 V, 50/60 Hz	⊕	IP44	40000h


WHITE BLACK



Outdoor lighting



STONE S 10579

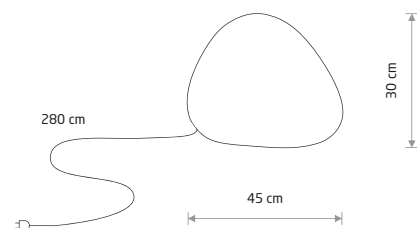

STONE S


plastic PE

10579



1xE27, max 25W only LED

IP44

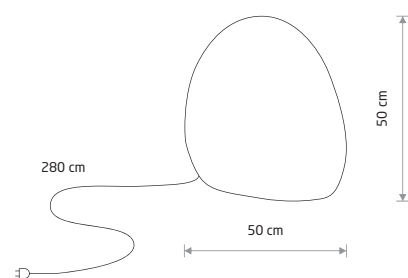

STONE M


plastic PE

10580



1xE27, max 25W only LED

IP44

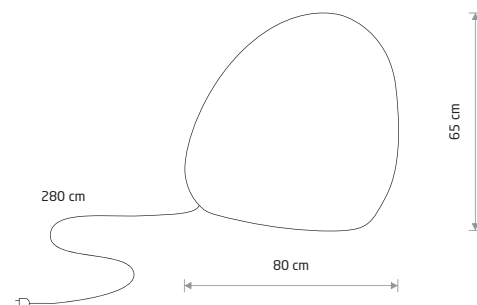

STONE L

plastic PE

10581



1xE27, max 25W only LED


IP44




STONE L 10581

WHITE



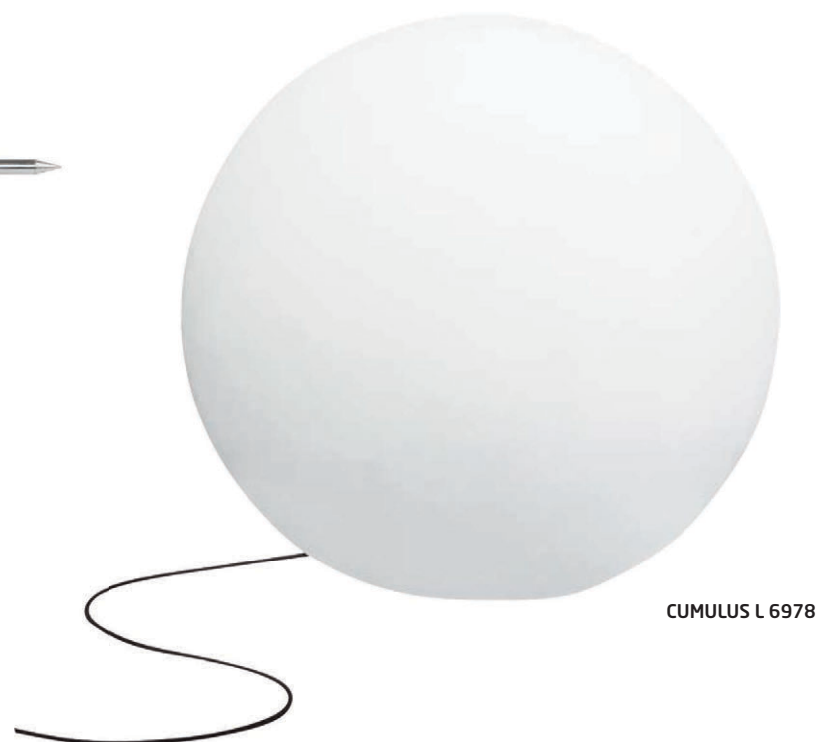

CUMULUS L 6978




CUMULUS S

plastic PE

6976

1xE27, max 25W only LED

IP44

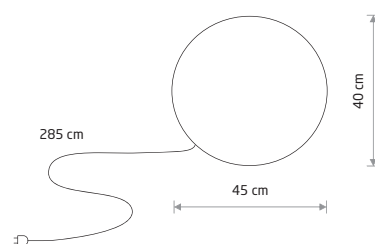


CUMULUS M

plastic PE

6977

1xE27, max 25W only LED

IP44

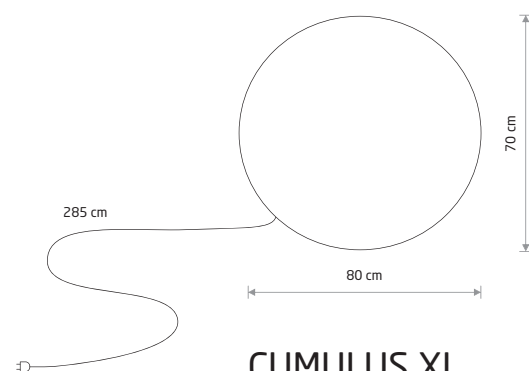


CUMULUS XL

plastic PE

9714

1xE27, max 25W only LED

IP44

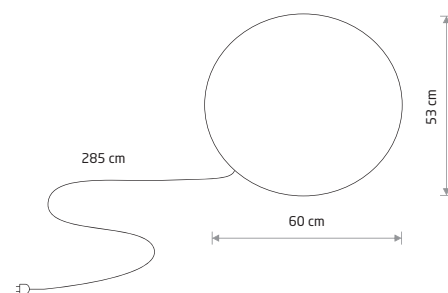

CUMULUS L

plastic PE

6978

1xE27, max 25W only LED


IP44



CUMULUS S 9751



CUMULUS M 9715




CUMULUS S

plastic PE, painted steel

9751

1xE27, max 25W only LED

IP65




CUMULUS M

plastic PE, painted steel

9715

1xE27, max 25W only LED

IP65



CUMULUS L

plastic PE, painted steel


9607

1xE27, max 25W only LED


IP65




FLOWERPOT S 9711

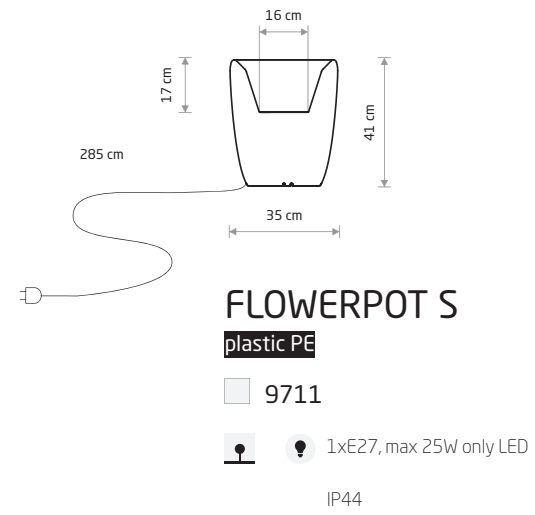

FLOWERPOT M 9712

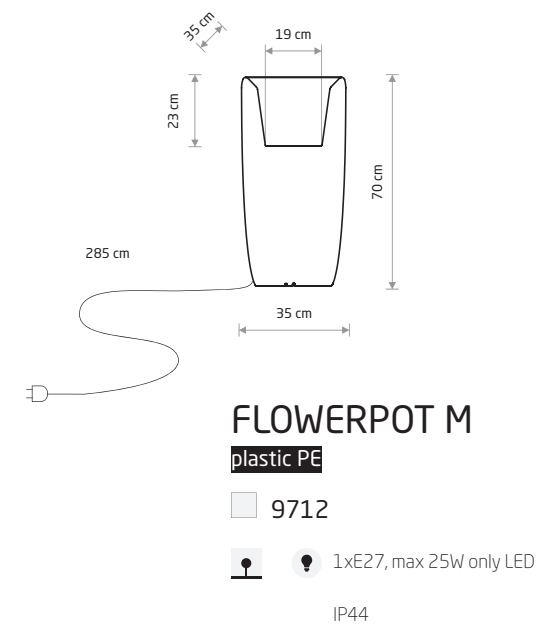

FLOWERPOT L 9713

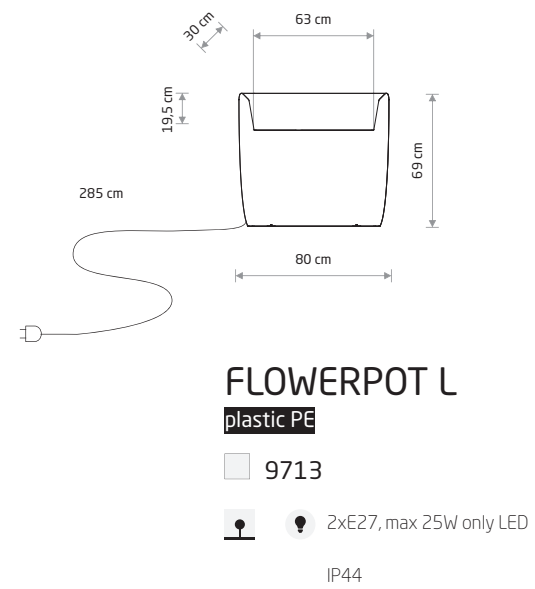


FLOWERPOT S 9711

FLOWERPOT M 9712

FLOWERPOT S 9711



CUMULUS CUBE M 8966

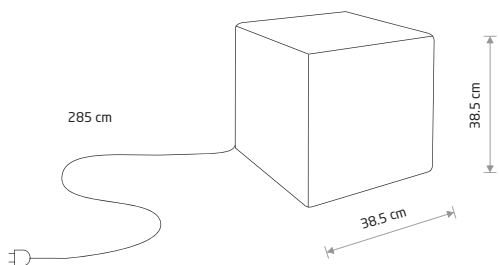


CUMULUS CUBE M
plastic PE

8966

1xE27, max 25W only LED
IP44




CUMULUS CUBE L 8965

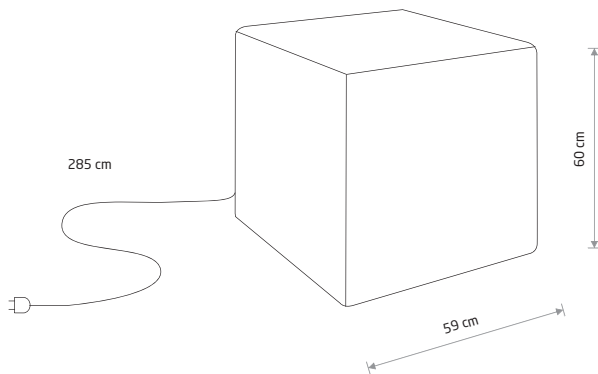

CUMULUS CUBE L
plastic PE

8965

1xE27, max 25W only LED
IP44




STAR
plastic PE

9426

1xE27, max 25W only LED
IP44



STAR 9426

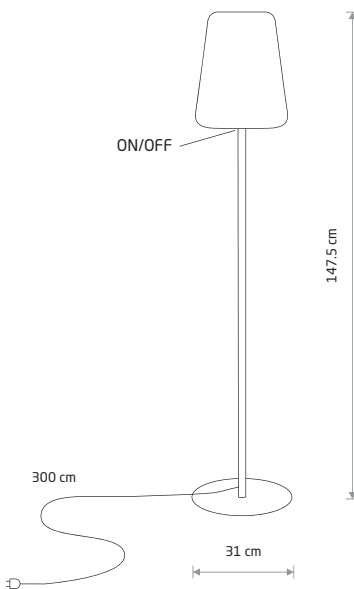

PATIO
painted steel, plastic LLDPE

10105

1xE27, max 25W only LED
IP44




PATIO 10105






ZOLA LED 11546


ZOLA LED 11545

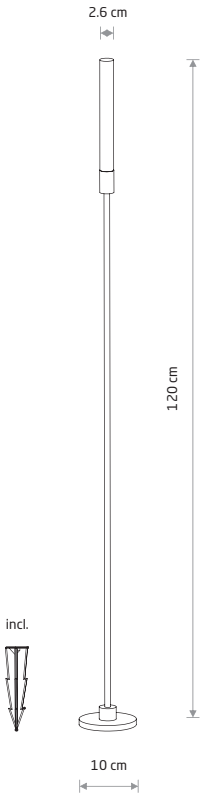

ZOLA LED
painted aluminum, plastic PC
■ 11546
■

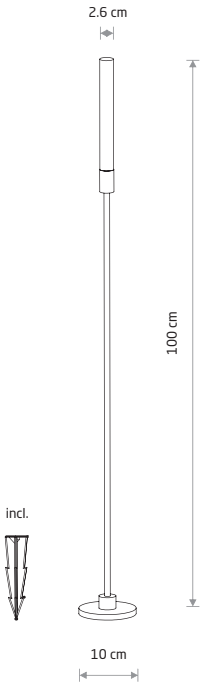

ZOLA LED
painted aluminum, plastic PC
■ 11545
■

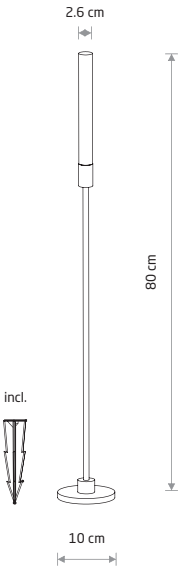


ZOLA LED
painted aluminum, plastic PC
■ 11544
■

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	VOLTAGE DC	Safety type	Ingress protection	Lifetime
11544	3W LED	3000K	100 lm	360 °	>90	24V	III	IP54	30000h
11545	3W LED	3000K	100 lm	360 °	>90	24V	II	IP54	30000h
11546	3W LED	3000K	100 lm	360 °	>90	24V	III	IP54	30000h




RUBY LED 11542

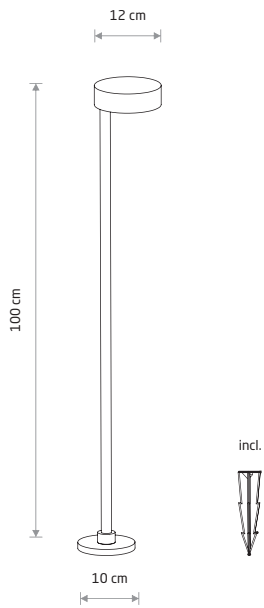

RUBY LED
painted aluminum, plastic PC
■ 11542
🔌




TESSA LED 11541

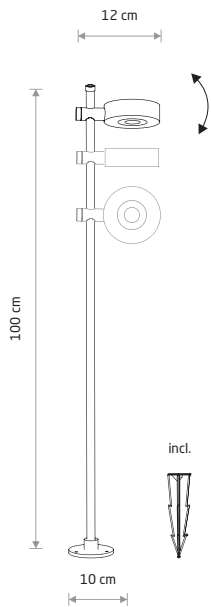

TESSA LED
painted aluminum, plastic PC
■ 11541
🔌

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11542	7W LED	3000K	400 lm	24 °	>90	~220-230 V, 50/60 Hz	⚡	>0.7	IP54	30000h
11541	7W LED	3000K	400 lm	70 °	>90	~220-230 V, 50/60 Hz	⚡	>0.7	IP54	30000h



LIV LED
painted aluminum, plastic PC
■ 11538
🔌

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11538	6W LED	3000K	200 lm	20 °	>90	~220-230 V, 50/60 Hz	⚡	>0.7	IP54	30000h



MIA LED M
11374

MIA LED M
painted aluminum, plastic PC

11374



MIA LED L
11375

MIA LED L
painted aluminum, plastic PC

11375



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11374	30W LED	3000K	2500 lm	70 °	>80	~220-230 V, 50/60 Hz	⚡	>0.9	IP54	30000h
11375	100W LED	3000K	7800 lm	70 °	>80	~220-230 V, 50/60 Hz	⚡	>0.9	IP54	30000h

BLACK


IDA
painted aluminum, glass

11371



1xE27, max 10W LED

IP44



IDA
11371




IDA
painted aluminum, glass

11372



2xE27, max 10W LED

IP44



IDA
11372




IDA
painted aluminum, glass

11373



1xE27, max 10W LED

IP44




IDA
11373



BLACK



SLIT LED 11376

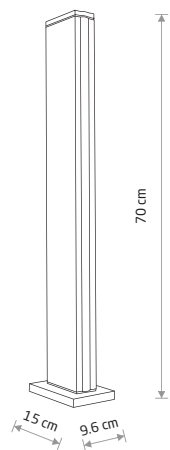

SLIT LED

■ painted aluminum, plastic PC

■ 11376




■ BLACK

SLIM LED

■ painted aluminum, plastic PC



■ 11540

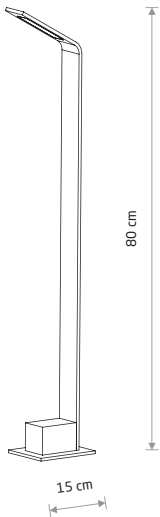

SLIM LED 11540



LHOTSE LED 4448

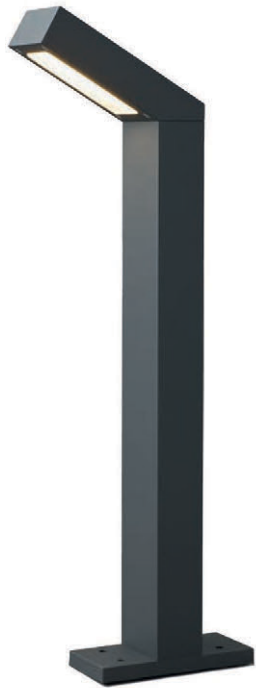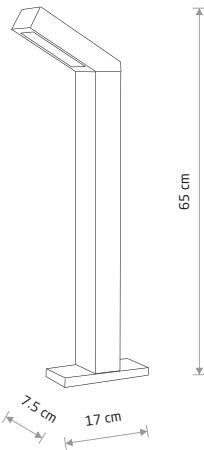

LHOTSE LED

■ painted aluminum, plastic PC


■ 4448



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11540	7W LED	3000K	450 lm	120 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
4448	9W LED	3000K	169 lm	70 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h

■ BLACK

■ GRAPHITE



STRUCTURE LED

painting aluminum, plastic PC

8146




STRUCTURE LED 8146


SYMMETRY LED

painting aluminum, plastic PC

8176



SYMMETRY LED 8176

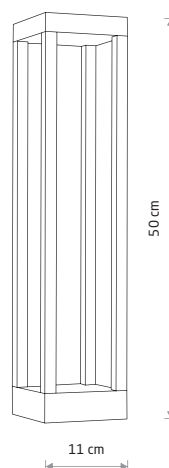

STRUCTURE LED

painting aluminum, plastic PC

8145




STRUCTURE LED 8145

SYMMETRY LED

painting aluminum, plastic PC

8180

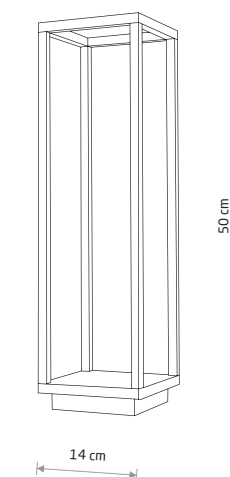


SYMMETRY LED 8180

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8145	13W LED	3000K	820 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h
8146	13W LED	3000K	820 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8176	7W LED	3000K	210 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h
8180	7W LED	3000K	380 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h




TEPIC LED 9508



TEPIC LED
painted aluminum
■ 9508



THIKA LED B
painted aluminum, glass
■ 9120

THIKA LED B 9120




MONTERREY LED 9507



MONTERREY LED
painted aluminum
■ 9507


THIKA LED
painted aluminum, glass
■ 9118

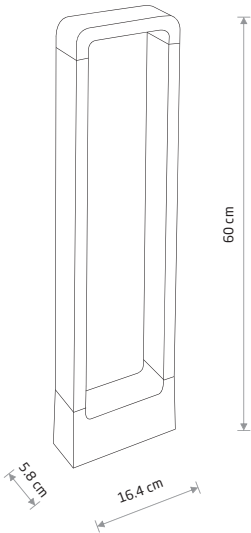
THIKA LED 9118

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9508	9W LED	3000K	395 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h
9507	9W LED	3000K	410 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.8	IP54	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9118	9W LED	3000K	550 lm	40 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
9120	15W LED	3000K	1200 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h




POLE LED 9185

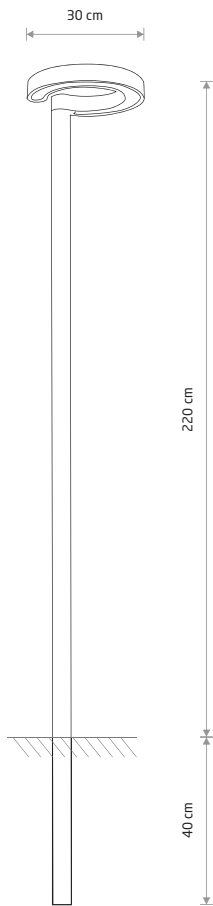


POLE LED
painted aluminum, plastic PC
9185

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9185	15W LED	3000K	1000 lm	70 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	30000h

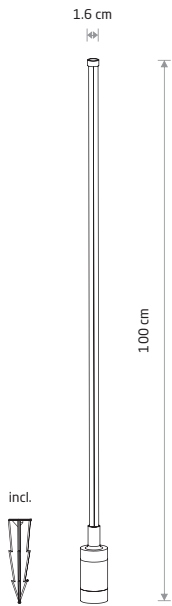

ZURI LED
painted aluminum, plastic PC
11547


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11547	12W LED	3000K	850 lm	120 °	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

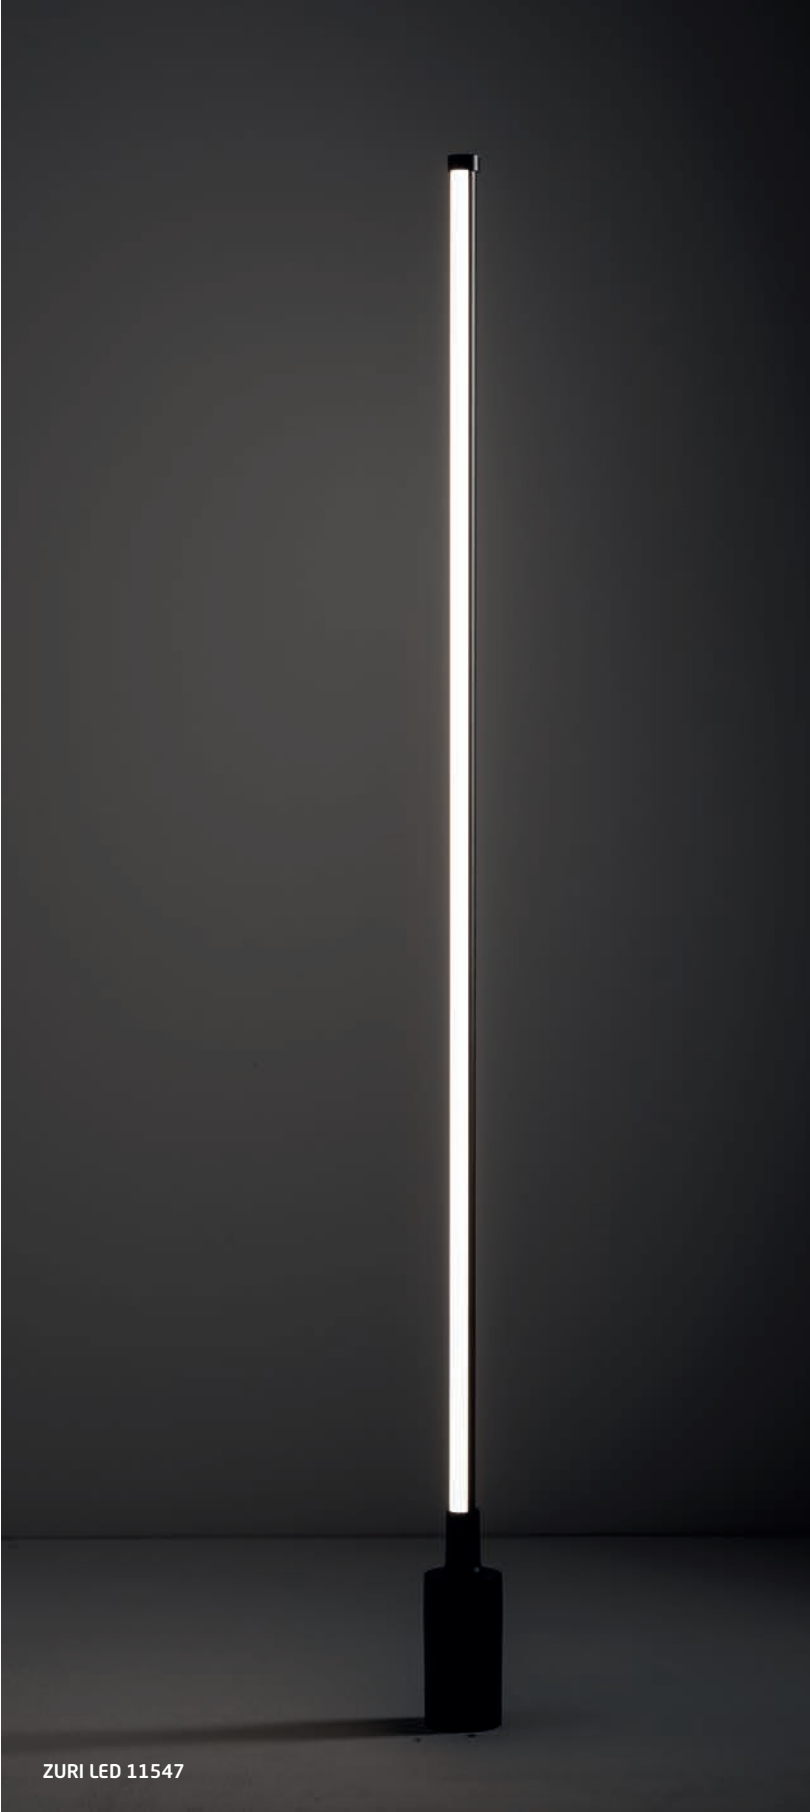

ZURI LED 11547



OTTAWA 9562

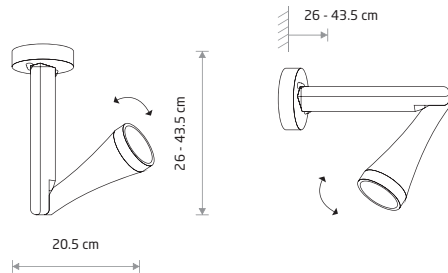


OTTAWA
painted aluminum, glass

9562

1xGU10 R50, max 10W only LED

IP44



SOUL
painted aluminum, glass

9555

1xGU10 R50, max 10W only LED


IP44



SOUL 9555



OTTAWA 9561



OTTAWA
painted aluminum, glass

9561

1xGU10 R50, max 10W only LED

IP44



OTTAWA 9563




OTTAWA
painted aluminum, glass

9563

1xGU10 R50, max 10W only LED

IP44

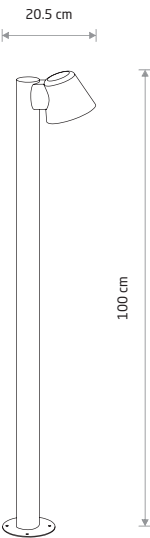

SOUL
painted aluminum, glass

9557

1xGU10 R50, max 10W only LED


IP44



SOUL 9557



NORIN 4446

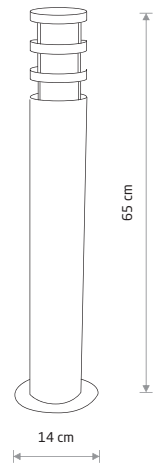

NORIN


■ painted aluminum, glass

■ 4446

● 1xE27, max 10W only LED
IP44



HORN 4906

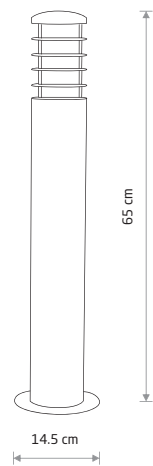

HORN

■ painted aluminum, glass

■ 4906

● 1xE27, max 10W only LED
IP44


TUBINGS S 8160



TUBINGS M 8161



TUBINGS 8158




TUBINGS S

■ painted aluminum, glass

■ 8160

● 1xGU10 R50, max 10W only LED
IP54




TUBINGS M

■ painted aluminum, glass, plastic

■ 8161

● 1xGU10 R50, max 10W only LED
IP54

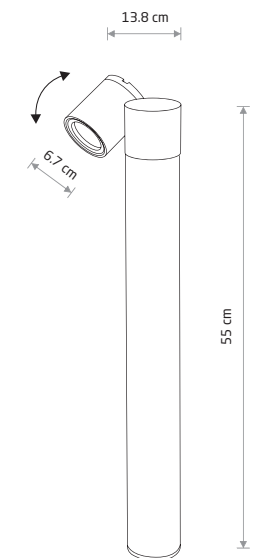


TUBINGS


■ painted aluminum, glass

■ 8158

● 1xGU10 R50, max 10W only LED
IP54

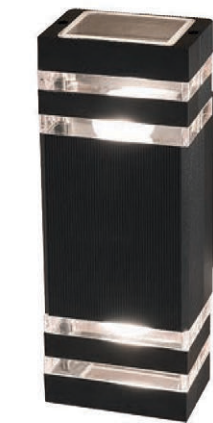

RIO 4424



RIO

■ painted aluminum, plastic PC

■ 4424



● 2xE27, max 10W only LED

IP54

OIR


■ painted aluminum, plastic PC

■ 9158



● 1xE27, max 10W only LED


IP44

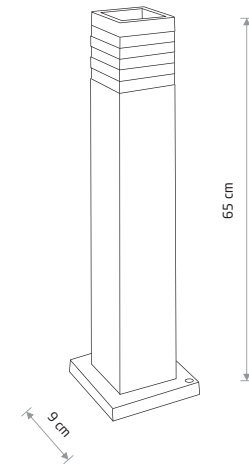

OIR 9158



RIO SENSOR 7017



RIO


■ painted aluminum, plastic PC

■ 4423



● 1xE27, max 10W only LED

IP54



RIO SENSOR

■ painted aluminum, plastic PC

■ 7017



● 1xE27, max 10W only LED

IP54

RIO SENSOR


■ painted aluminum, plastic PC

■ 9097



● 1xE27, max 10W only LED

IP54

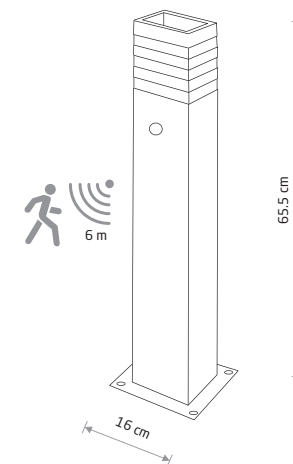


RIO SENSOR 9097






MEKONG 4418



MEKONG
painted aluminum, glass
■ 4418
1xE27, max 10W only LED
IP42




MEKONG 4420




MEKONG
painted aluminum, glass
■ 4420
2xE27, max 10W only LED
IP42



MEKONG 4698




MEKONG
painted aluminum, glass
■ 4698
1xE27, max 10W only LED
IP42

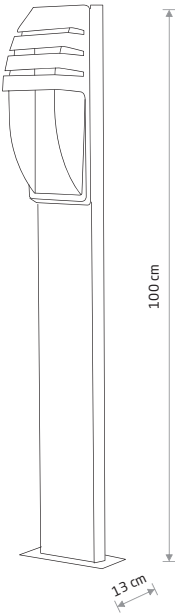

MISTRAL
painted aluminum, plastic PC
■ 3394
1xE27, max 10W only LED
IP44



MISTRAL 3394

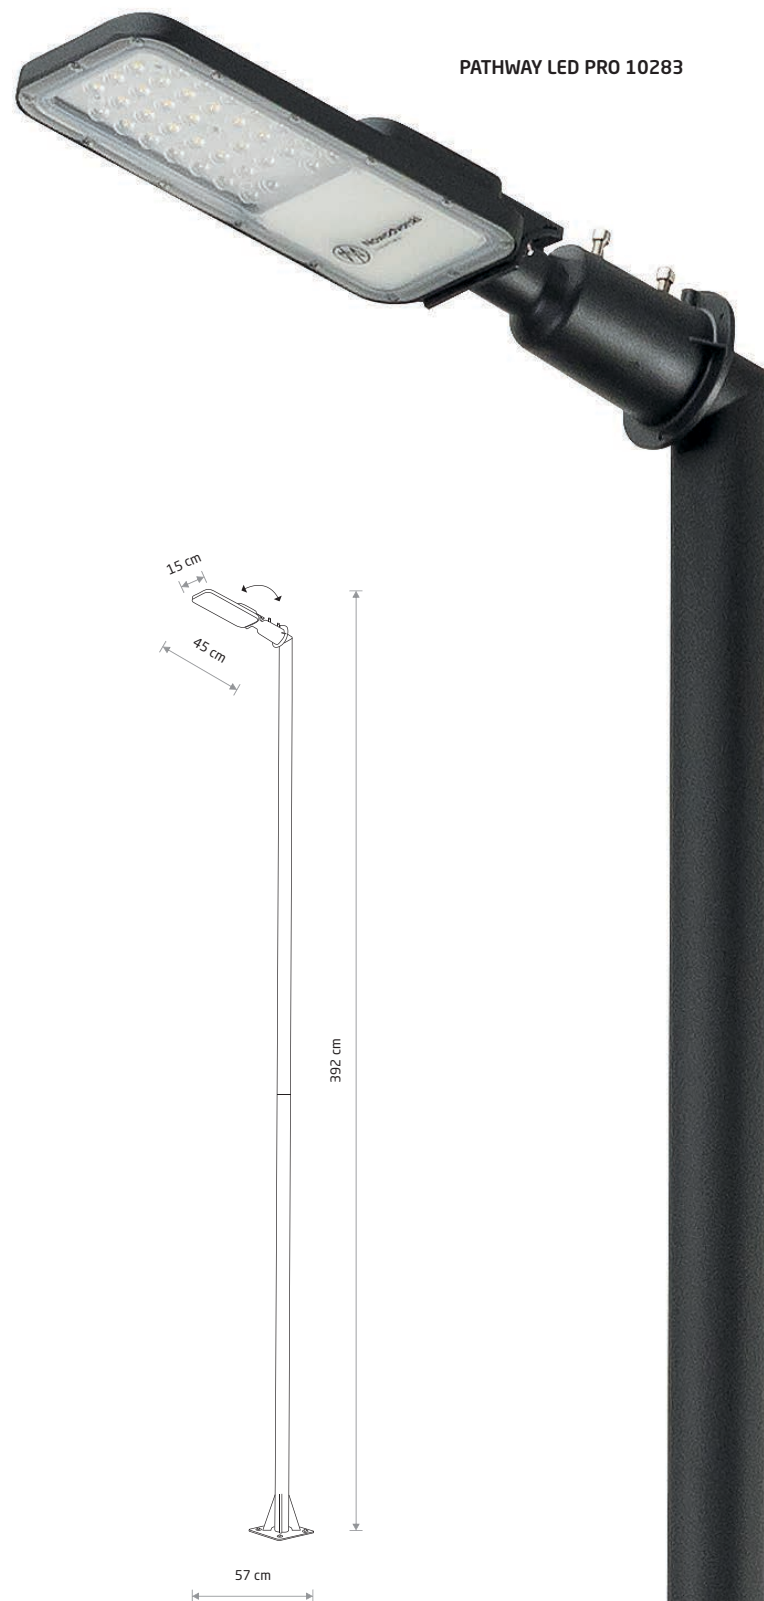


PATHWAY LED PRO 10283

PATHWAY LED PRO

painted steel, painted aluminum, plastic



10283 3000K
 10633 4000K



PATHWAY FOUNDATION KIT

steel


8795

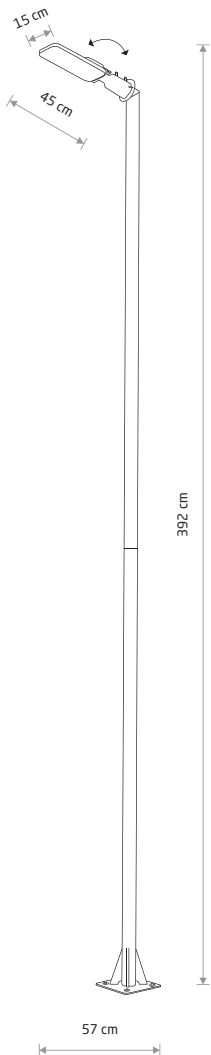

PATHWAY LED S

painted steel, painted aluminum, plastic


9420



PATHWAY LED M

painted steel, painted aluminum, plastic

9252



PATHWAY LED L

painted steel, painted aluminum, plastic

9125





PATHWAY LED S 9420

PATHWAY LED M 9252

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10283	60W LED	3000K	5700 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
10633	60W LED	4000K	5900 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protect	Lifetime
9420	24W LED	3000K	2200 lm	100 °	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9252	24W LED	3000K	2200 lm	100 °	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h
9125	36W LED	3000K	3600 lm	100 °	≥ 70	~220-230 V, 50/60 Hz	⊕	>0.9	IP65	30000h

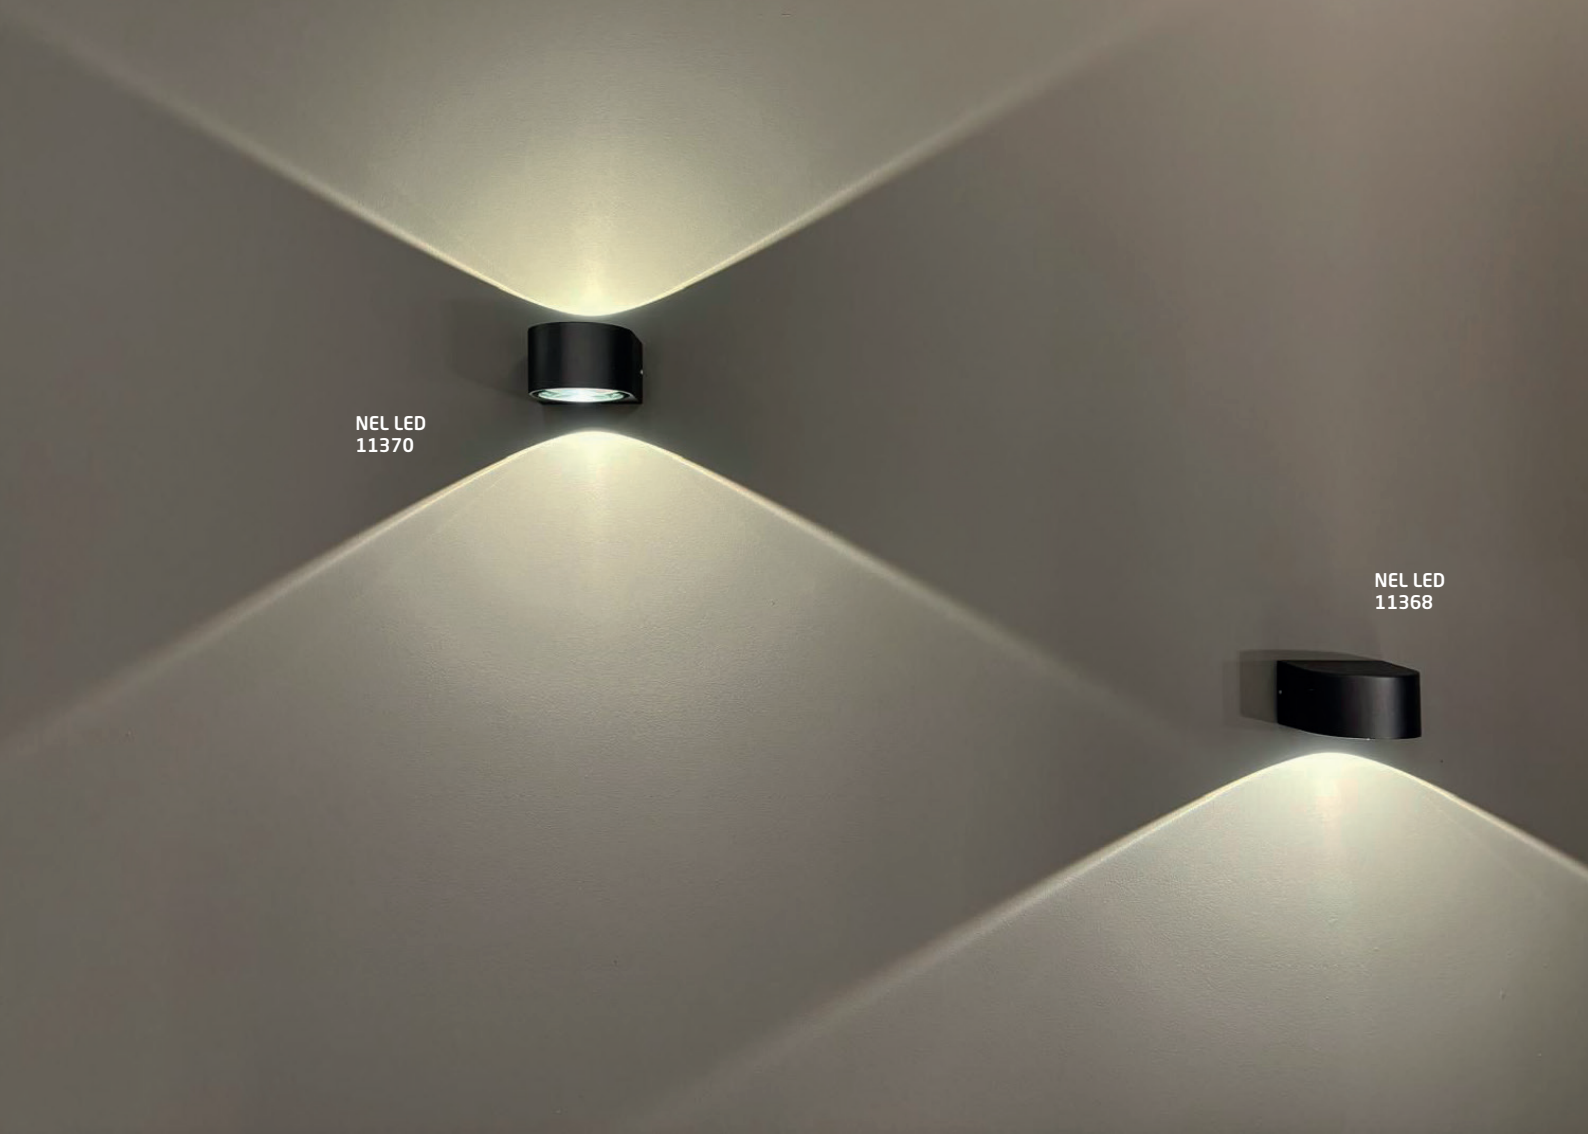

NEL LED

Painted aluminum, glass

11368




NEL LED

Painted aluminum, glass

11370




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11368	5W LED	3000K	500 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11370	2x5W LED	3000K	880 lm	120°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h



ORLA LED S

Painted aluminum, plastic PC

11548 11551




ORLA LED M



Painted aluminum, plastic PC

11550 11552



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11548	12W LED	3000K	750 lm	120°	>90	~220-230V V, 50/60 Hz	⊕	>0.7	IP54	30000h
11550	20W LED	3000K	1300 lm	120°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11551	12W LED	3000K	750 lm	120°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11552	20W LED	3000K	1300 lm	120°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

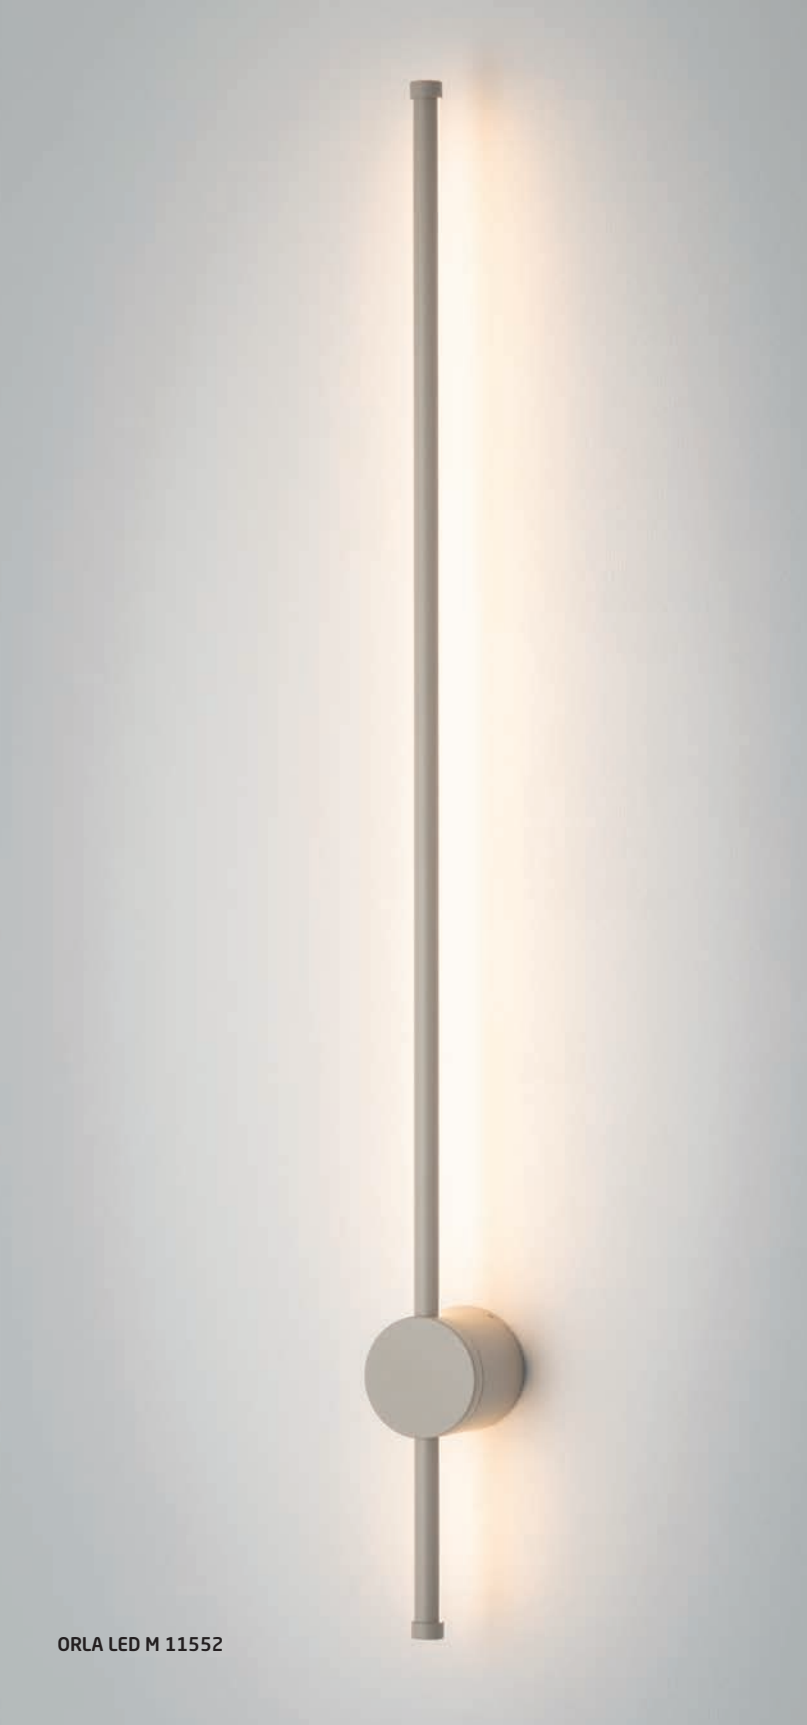

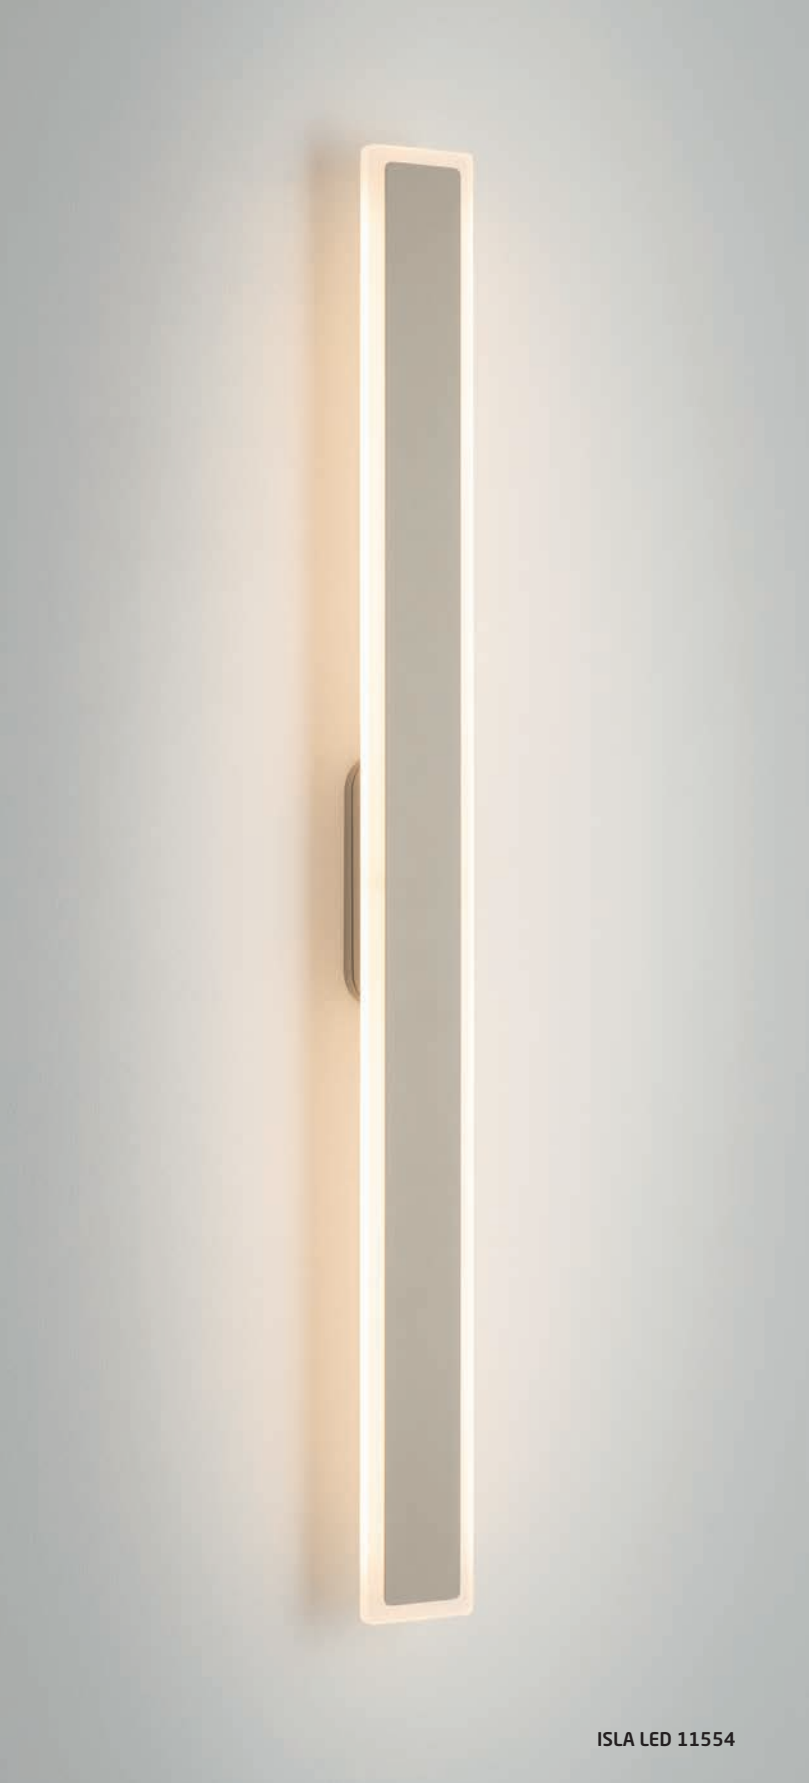

ISLA LED
painted aluminum, plastic PMMA


■ 11553 ■ 11554

■

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11553	22W LED	3000K	1200 lm	>90°	120	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11554	22W LED	3000K	1200 lm	>90°	120	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

■ BLACK ■ SAND


Can be used in the bathroom



DEMI LED M
painted aluminum, plastic PC

■ 11555 ■ 11556 ■ 11557

■



DEMI LED L
painted aluminum, plastic PC

■ 11558 ■ 11560 ■ 11561


■

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11555	18W LED	3000K	1200 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11556	18W LED	3000K	1200 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11557	18W LED	3000K	1200 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11558	24W LED	3000K	1500 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11560	24W LED	3000K	1500 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11561	24W LED	3000K	1500 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h


DEMI LED L 11560

■ BLACK ■ SAND ■ BRICK RED

Can be used in the bathroom

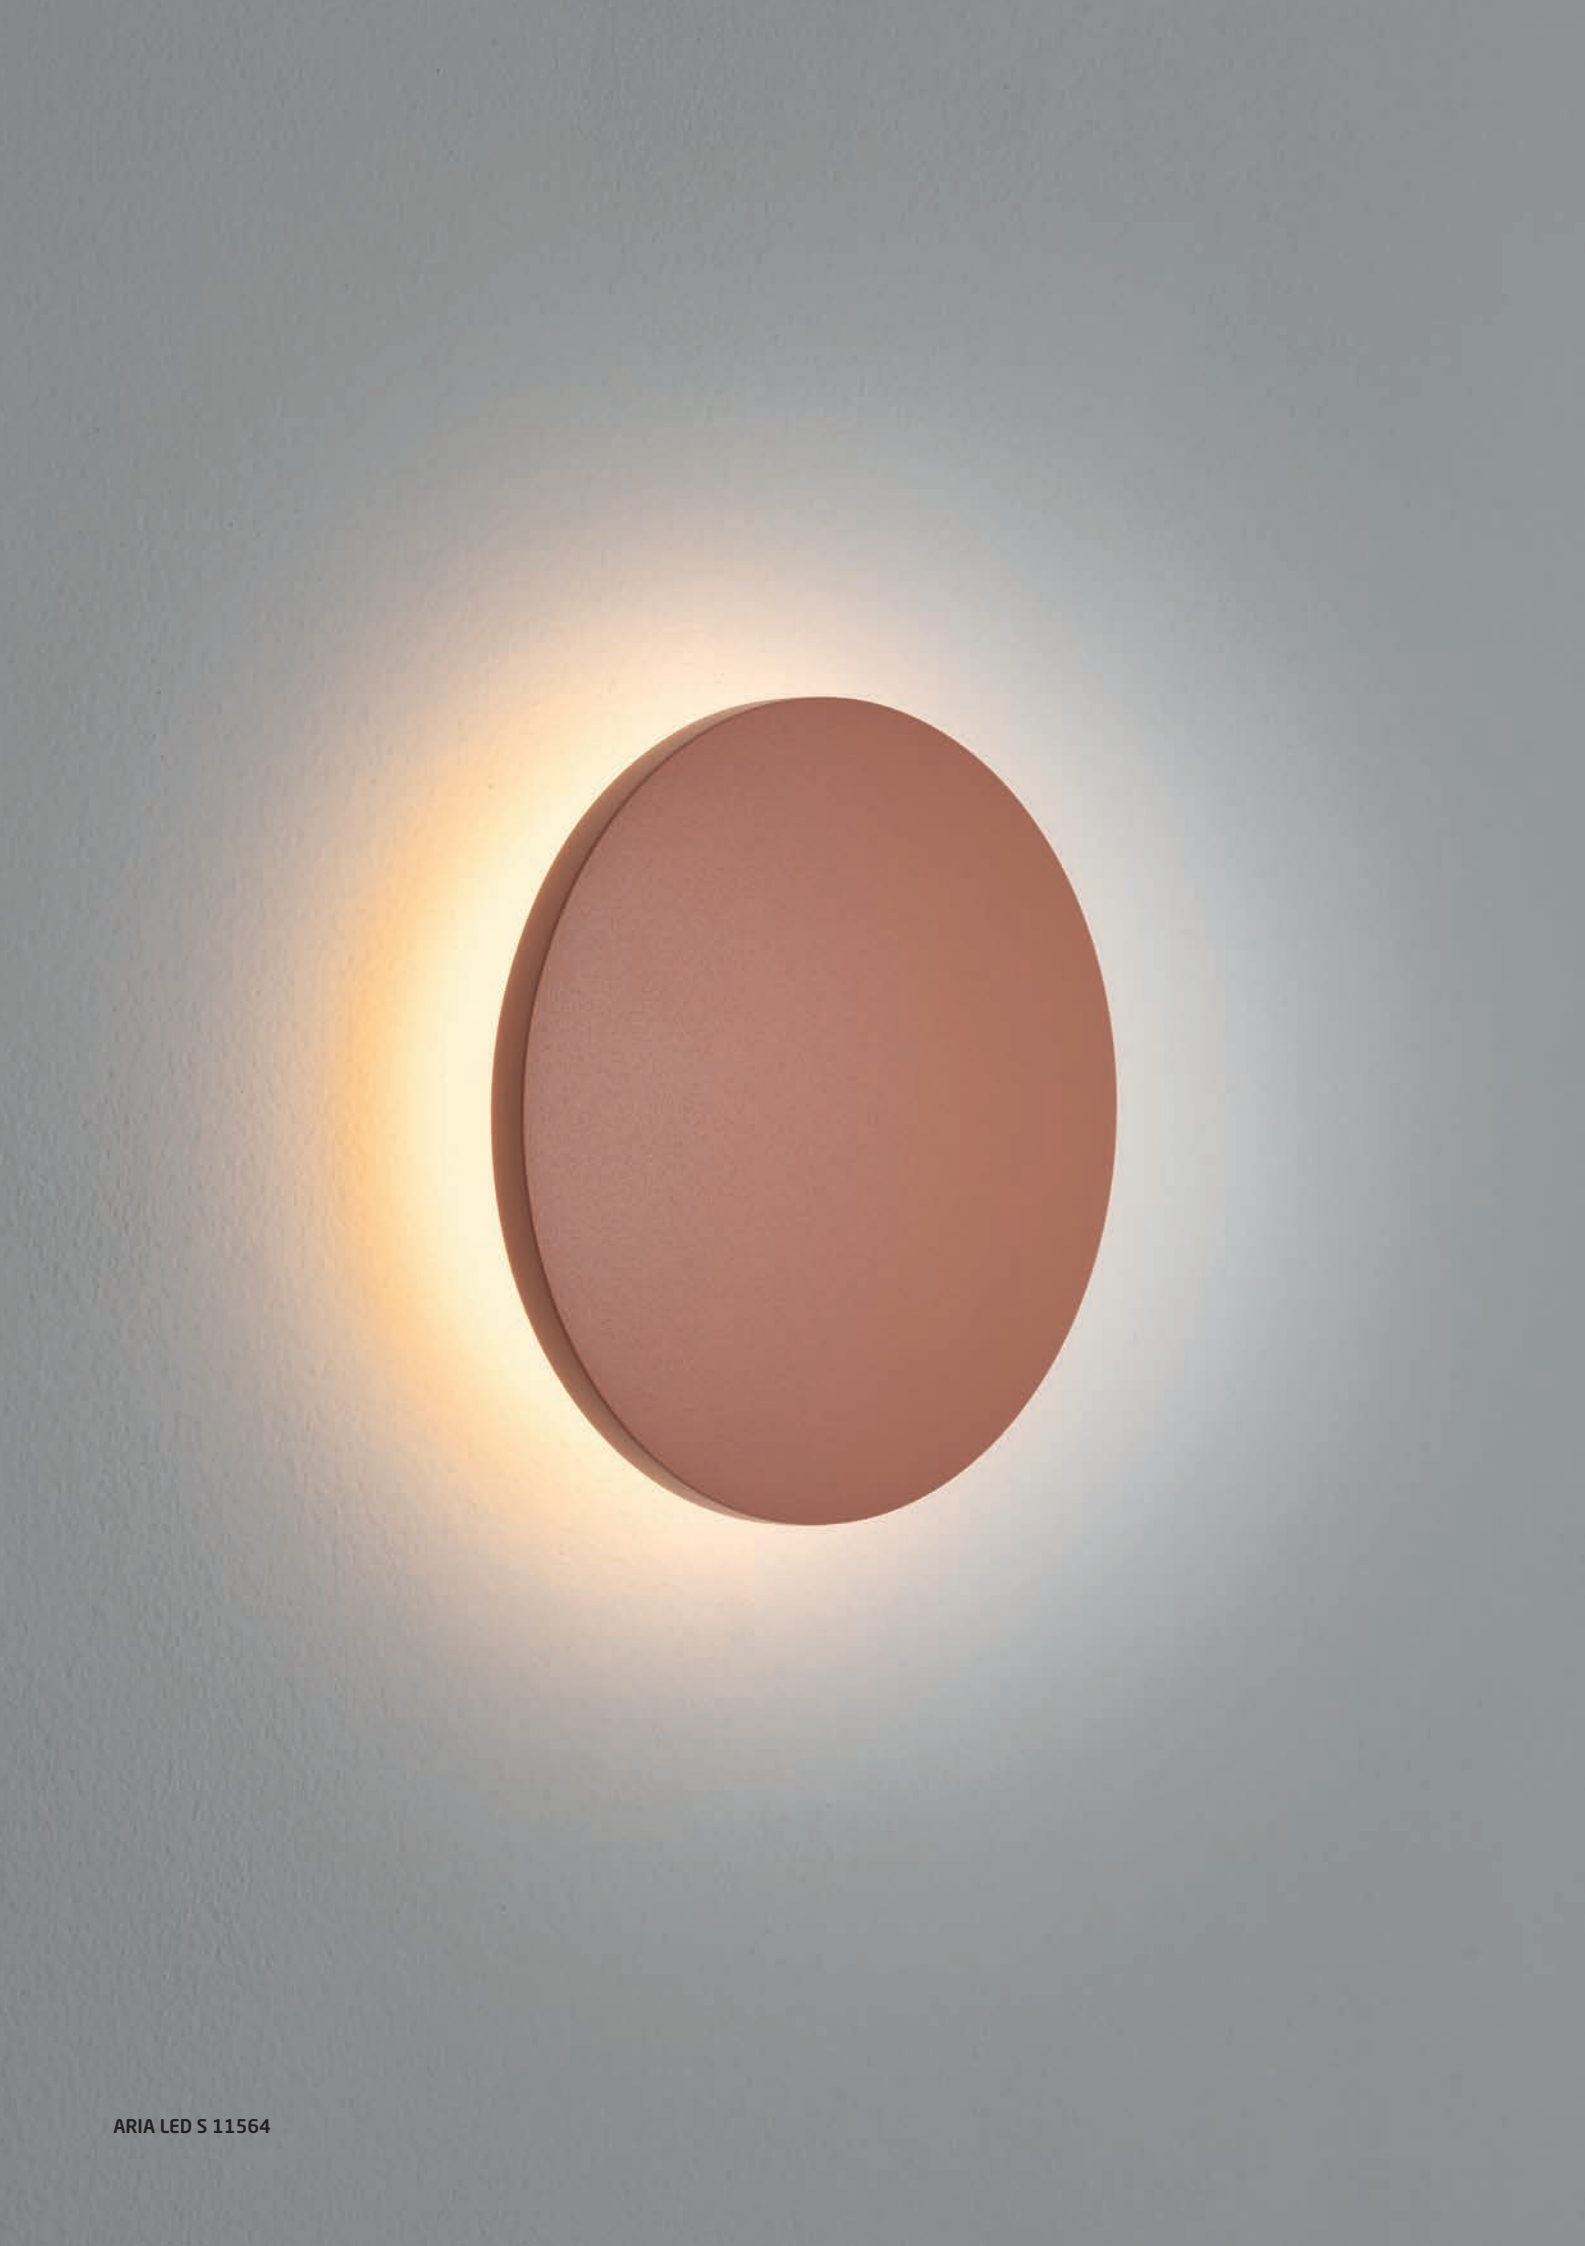

ARIA LED S 11564



ARIA LED S

painted aluminum, plastic PC


11562

11563

11564



ARIA LED M 11566




ARIA LED M

painted aluminum, plastic PC

11565

11566

11567




ARIA LED L

painted aluminum, plastic PC

11568

11570

11571



ARIA LED XL

painted aluminum, plastic PC

11572

11573

11574




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11562	6W LED	3000K	370 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11563	6W LED	3000K	370 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11564	6W LED	3000K	370 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11565	9W LED	3000K	540 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11566	9W LED	3000K	540 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11567	9W LED	3000K	540 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11568	12W LED	3000K	750 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11570	12W LED	3000K	750 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11571	12W LED	3000K	750 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11572	15W LED	3000K	1100 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11573	15W LED	3000K	1100 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h
11574	15W LED	3000K	1100 lm	110°	>90	~220-230 V, 50/60 Hz	⊕	>0.7	IP54	30000h

Can be used in the bathroom


BLACK

SAND

BRICK RED

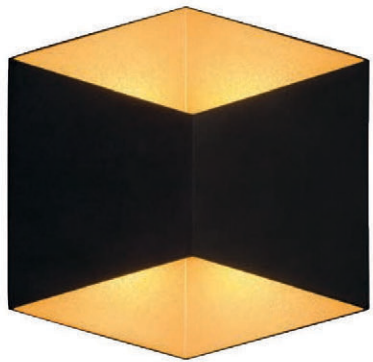


TRIANGLES LED 8141



TRIANGLES LED

Painted aluminum, glass

8143 8142 8141




SEMI LED

Painted aluminum, glass

6775 11363 11365




ELLIPSES LED 8182



ELLIPSES LED

Painted aluminum, glass

8140 8182



SEMI LED M

Painted aluminum, glass

11364 11366



SEMI LED M 11366

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8140	2x5W LED	3000K	800 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
8141	2x5W LED	3000K	750 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	> 0.5	IP54	10000h
8142	2x5W LED	3000K	700 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
8143	2x5W LED	3000K	800 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
8182	2x5W LED	3000K	700 lm	180 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
6775	7W LED	3000K	242 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	8000h
11363	2x3W LED	3000K	300 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11364	2x5W LED	3000K	500 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11365	2x3W LED	3000K	300 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11366	2x5W LED	3000K	500 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h


WHITE BLACK-GOLD BLACK

Can be used in the bathroom

GRAPHITE BLACK BRASS



MARGOT 10504

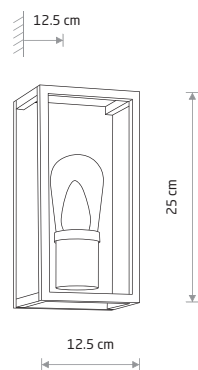

MARGOT
painted aluminum, glass

10504

1xE14, max 10W only LED


IP54



LENS LED 9112



MARGOT 10503

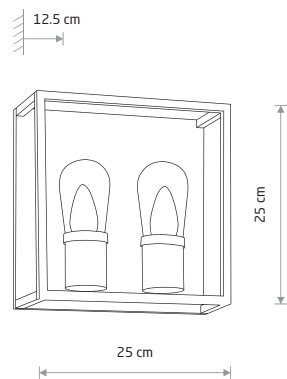


MARGOT
painted aluminum, glass

10503

2xE14, max 10W only LED

IP54

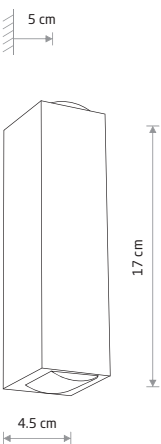

LENS LED
painted aluminum, glass

9112 9113



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9112	2x2W LED	3000K	40 lm	10°	≥ 80	~220-230 V, 50/60 Hz	⚡	>0.5	IP54	10000h
9113	2x2W LED	3000K	59 lm	10°	≥ 80	~220-230 V, 50/60 Hz	⚡	>0.5	IP54	10000h


GRAPHITE

WHITE BLACK

LENS LED 9113



ASSOS 9123



ASSOS

■ painted aluminum, glass

■ 9123

■ 1xGU10 R50, max 10W only LED

IP54


ARRIS

■ painted aluminum, glass

■ 9516

■ 1xGU10 R50, max 10W only LED


IP54



ARRIS 9516



ASSOS 9124



ASSOS

■ painted aluminum, glass

■ 9124

■ 2xGU10 R50, max 10W only LED

IP54


NICO

■ painted aluminum, glass

■ 9518

■ 1xGU10 R50, max 10W only LED


IP54



NICO 9518



PRIMM 9551



PRIMM

■ painted aluminum, glass

■ 9551

■ 1xGU10 R50, max 10W only LED

IP54


NICO

■ painted aluminum, glass

■ 9517


■ 2xGU10 R50, max 10W only LED

IP54



NICO 9517

FOG 3403




FOG
painted aluminum, glass

3403

1xE27, max 25W only LED

IP44

FOG 3402




FOG
painted aluminum, glass

3402

1xE27, max 25W only LED

IP44

FOG 3404



FOG
painted aluminum, glass

3404

2xE27, max 25W only LED

IP44




NEGRO
painted aluminum, glass

4425

1xGU10 R50, max 10W only LED

IP54



EXE
painted aluminum, glass

8331

1xGU10 R50, max 10W only LED

IP54



EXE
painted aluminum, glass

8330

2xGU10 R50, max 10W only LED

IP54



NEGRO 4425




EXE 8331



EXE 8330



ROCK PRO 10687




ROCK PRO
painted aluminum, plastic PC

10687

1xE27, max 25W only LED
IP44



ROCK PRO 10686




ROCK PRO
painted aluminum, plastic PC

10686

1xE27, max 25W only LED
IP44



ROCK PRO 10688

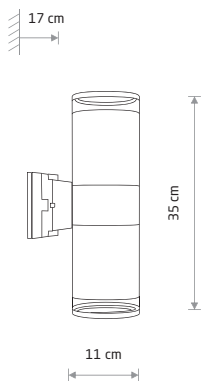


ROCK PRO
painted aluminum, plastic PC

10688

2xE27, max 25W only LED
IP44



SIERRA 4422




SIERRA
painted aluminum, plastic PC

4422

2xE27, max 25W only LED
IP54



HEXA 9565




HEXA
painted aluminum, glass

9564 9565

1xGU10 R50, max 10W only LED
IP44



EDESA LED M 9108




EDESA LED M
painted aluminum, glass

9108 9107



EDESA LED S 9111




EDESA LED S
painted aluminum, glass

9111



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9107	7W LED	3000K	530 lm	19°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
9108	7W LED	3000K	530 lm	19°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h
9111	3W LED	3000K	250 lm	30°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	10000h


QUARTZ 3411



QUARTZ
painted aluminum, plastic PC

■ 3411

■ 1xE27, max 10W only LED
IP21



ORINOKO
painted aluminum, plastic PC

■ 4387


■ 1xE27, max 10W only LED
IP44

ORINOKO 4387



CABO LED
painted aluminum, plastic PC


■ 11804 ■ 11805

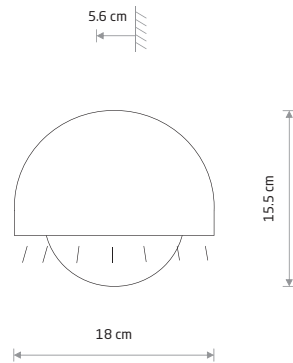

CABO LED 11804

UNIT LED
painted aluminum, glass

■ 9122




UNIT LED 9122

BRICK
painted aluminum, glass

■ 3408



■ 1xE27, max 25W only LED
IP65



BRICK 3408

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11804	10W LED	3000K	800 lm	120 °	>90	220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11805	10W LED	3000K	900 lm	120 °	>90	220/230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
9122	2x5W LED	3000K	727 lm	110 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h




OSCAR 11347

OSCAR
painted aluminum


■ 11346 ■ 11347

1xGU10 R50, max 15W only LED

IP54

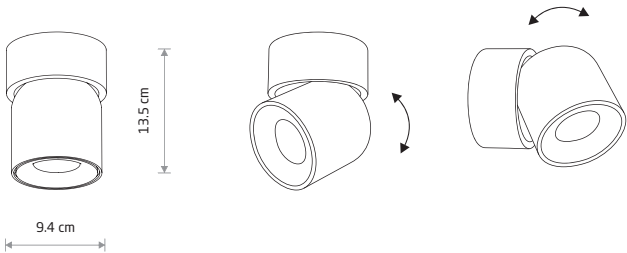

■ BLACK ■ WHITE



KHUMBU
painted aluminum, glass


■ 4443

1xG9, max 10W only LED

IP44




KHUMBU 4443



MUNO LED
painted aluminum, glass

■ 6776

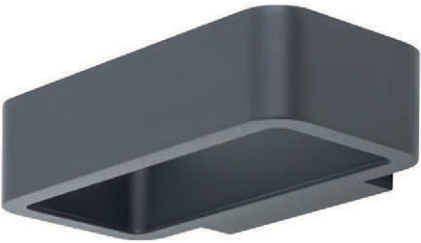


MUNO LED 6776

■ GRAPHITE

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
6776	6W LED	3000K	240 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	8000h




PICNIC LED 8177

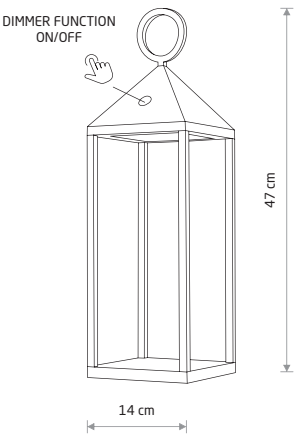

PICNIC LED
painted aluminum, plastic PC

8178 8177



HANGING SET
FOR PICNIC LED

aluminum, steel

8107 8106

Lampa bezprzewodowa, przenośna, zewnętrzna

- Podstawa ładująca w komplecie
- Akumulator litowy 2×2200 mAh
- Czas pełnego ładowania 5-8 h
- Czas pracy 12 h
- Włącznik dotykowy
- Ściemniacz

Wireless lamp, portable, outdoor


- Charging base (set incl.)
- 2×2200 mAh lithium battery
- Full charge time 5-8h
- Work time 12 h
- Touch switch
- Dimmable

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
8177	2.2W LED	3000K	155 lm	46°	≥84	~220-230 V, 50/60 Hz	☐	IP54	30000h
8178	2.2W LED	3000K	155 lm	46°	≥84	~220-230 V, 50/60 Hz	☐	IP54	30000h

WHITE GRAPHITE



PICNIC LED 8178

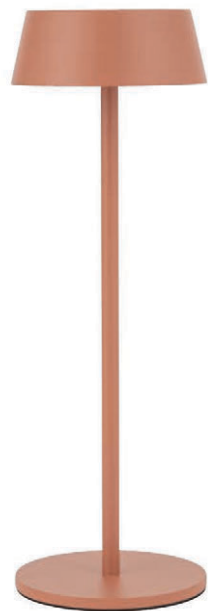


AMY LED 11534



AMY LED 11535



AMY LED 11533

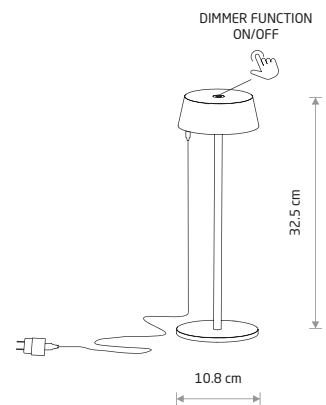

AMY LED

Painted aluminum, plastic PC

- 11531
- 11532
- 11533
- 11534
- 11535



Lampa bezprzewodowa, przenośna, zewnętrzna

- Ładowarka USB C (w zestawie)
- Włącznik dotykowy
- Ściemniacz 10-100%

Wireless lamp, portable, outdoor

- Power adapter USB C (set incl.)
- Touch switch
- Dimmable 10-100%

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11531	2W LED	3000K	170 lm	45°	>80	5V	⚡	IP54	30000h
11532	2W LED	3000K	170 lm	45°	>80	5V	⚡	IP54	30000h
11533	2W LED	3000K	170 lm	45°	>80	5V	⚡	IP54	30000h
11534	2W LED	3000K	170 lm	45°	>80	5V	⚡	IP54	30000h
11535	2W LED	3000K	170 lm	45°	>80	5V	⚡	IP54	30000h

- WHITE
- BLACK
- SAND
- BRICK RED
- GREEN




AMY LED 11534



NALA LED 11536

- Lampa bezprzewodowa, przenośna, zewnętrzna
- Ładowarka USB C (w zestawie)
 - Włącznik dotykowy
 - Ściemniacz 10-100%

- Wireless lamp, portable, outdoor
- Power adapter USB C (set incl.)
 - Touch switch
 - Dimmable 10-100%

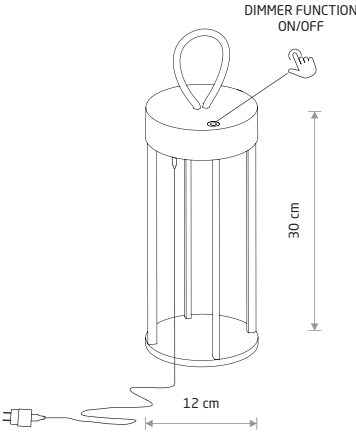

NALA LED
painted aluminum, plastic PC

■ 11536 ■ 11537



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11536	4W LED	2700K	170 lm	45 °	>80	5V	⚡	IP54	30000h
11537	4W LED	2700K	170 lm	45 °	>80	5V	⚡	IP54	30000h


■ BLACK ■ WHITE



MAHE LED 8398

- Lampa bezprzewodowa, przenośna, zewnętrzna
- Ładowarka MICRO USB (w zestawie)
 - Czas pełnego ładowania 5-7 h
 - Czas pracy 9 h
 - Włącznik dotykowy
 - Ściemniacz

- Wireless lamp, portable, outdoor
- Power adapter MICRO USB (set incl.)
 - Full charge time 5-7 h
 - Work time 9 h
 - Touch switch
 - Dimmable

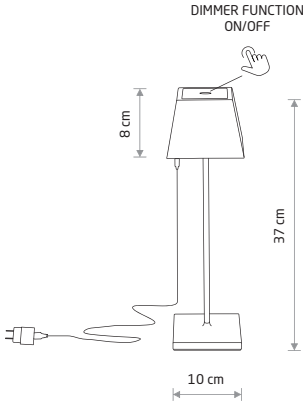

MAHE LED
painted aluminum, plastic PC

■ 8397 ■ 8398



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Ingress protection	Lifetime
8397	2.2W LED	3000K	168 lm	45 °	≥ 84	~220-230 V, 50/60 Hz	⚡	IP54	25000h
8398	2.2W LED	3000K	168 lm	46 °	≥ 84	~220-230 V, 50/60 Hz	⚡	IP54	25000h


■ WHITE ■ BLACK




PUEBLA LED 9513



MERIDA LED 9514



PUEBLA LED
painted aluminum, plastic PC
9513



MERIDA LED
painted aluminum, plastic PC
9514


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9513	12W LED	3000K	540 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h
9514	12W LED	3000K	540 lm	110°	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.9	IP54	20000h

GRAPHITE

Can be used in the bathroom



PIX LED 11367




PIX LED
painted aluminum, glass
11367

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11367	10W LED	3000K	500 lm	30°	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h

BLACK




OUTLINE LED S
11360




OUTLINE LED S
painted aluminum, plastic PC

11360

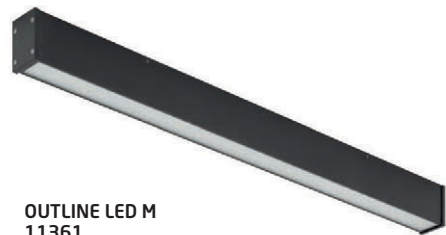

OUTLINE LED M
11361

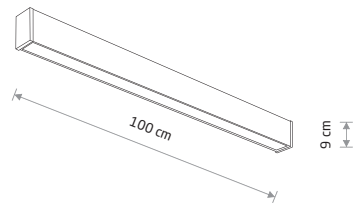


OUTLINE LED M
painted aluminum, plastic PC

11361



OUTLINE LED L
11362

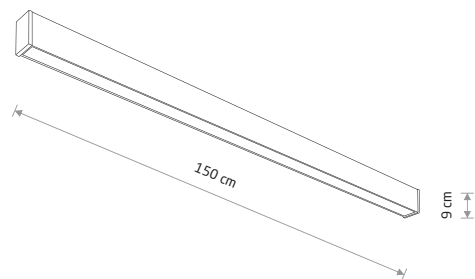

OUTLINE LED L
painted aluminum, plastic PC

11362



OUTLINE LED S 11360


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11360	20W LED	3000K	1200 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
11361	35W LED	3000K	1800 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h
11362	50W LED	3000K	3000 lm	100 °	>80	~220-230 V, 50/60 Hz	⊕	>0.9	IP44	30000h



CLINE LED 11377



CLINE LED 11377




CLINE LED
painted aluminum, glass
11377

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11377	3W LED	3000K	130 lm	80 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h



ABBY LED 11528




ABBY LED
painted aluminum, plastic PC
11528

cut out ø 58 mm



AVA LED 11530



AVA LED
painted aluminum, plastic PC
11530

cut out ø 58 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
11528	3W LED	3000K	10 lm	20 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h
11530	3W LED	3000K	40 lm	40 °	>80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	30000h



BAY LED 8164







BAY LED 8165



SIDEWALK SQUARE LED
8148



SIDEWALK ROUND LED
8147

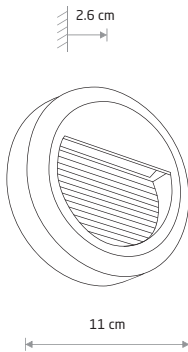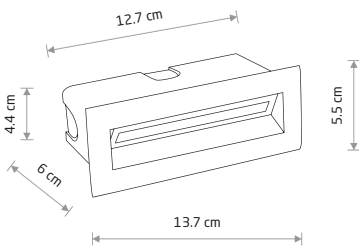

BAY LED

■ painted aluminum, plastic PC

■ 8164



BAY LED

■ painted aluminum, plastic PC

■ 8165



SIDEWALK SQUARE LED

■ painted aluminum, plastic PC

■ 8148



SIDEWALK ROUND LED

■ painted aluminum, plastic PC

■ 8147




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8164	3W LED	3000K	200 lm	70 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h
8165	5W LED	3000K	360 lm	70 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8147	3W LED	3000K	100 lm	120 °	≥80	~220-230 V, 50/60 Hz	⊕	>0.5	IP54	20000h
8148	3W LED	3000K	100 lm	120 °	≥80	~220-230V V, 50/60 Hz	⊕	>0.5	IP54	20000h



BASALT 3412




BASALT
painted aluminum, plastic

3412
1xE14, max 10W only LED
IP44



ASSAM 4453




ASSAM
painted aluminum, glass, plastic

4453
1xE27, max 10W only LED
IP65




INA 4907



INA
painted aluminum, glass, plastic

4907
1xE27, max 10W only LED
IP65




STEP LED
painted aluminum, plastic

6907 6908



STEP LED 6907



OIA LED
painted aluminum, plastic

9102 9103



cut out ø 40 mm




OIA LED 9103

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9102 9103	2W LED	3000K	50 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP20	10000h
6907	3W LED	3000K	120 lm	92 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	10000h
6908	3W LED	3000K	190 lm	92 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP44	10000h



BUSH 3401



BUSH

■ painted aluminum, glass

■ 3401




1xGU10 R50, max 10W only LED

IP65



SPIKE LED S 9101




SPIKE LED S

■ painted aluminum, glass

■ 9101



SPIKE LED M 9100



SPIKE LED M

■ painted aluminum, glass, plastic

■ 9100




Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9100	5W LED	3000K	300 lm	30 °	>80	~220-230 V, 50/60 Hz	⚡	>0.5	IP54	10000h
9101	5W LED	3000K	300 lm	30 °	>80	~220-230 V, 50/60 Hz	⚡	>0.5	IP54	10000h

■ BLACK ■ GRAPHITE



RUMI LED 11543

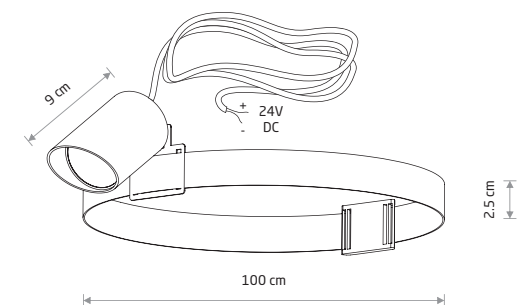

RUMI LED

■ painted aluminum, plastic PC

■ 11543



Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11543	7W LED	3000K	320 lm	50 °	>90	24V	⚡	IP54	30000h

■ BLACK



max 410 kg

4 cm

7 cm

PICCO LED S 9106

PICCO LED S

aluminum

9106

cut out ø 38 mm



max 620 kg

6 cm

9 cm

PICCO LED M 9105

PICCO LED M

aluminum

9105

cut out ø 55 mm



max 780 kg

7.5 cm

9.5 cm

PICCO LED L 9104

PICCO LED L

aluminum

9104

cut out ø 65 mm



max 500 kg

11 cm

14 cm

PAOLI 9554

PAOLI

steel, glass

9554

1xGU10 R50, max 10W only LED

cut out ø 100 mm

IP67



max 500 kg

6.7 cm

11.7 cm

MON LED 4454

MON LED

aluminum, glass

4454

cut out ø 64 mm



max 500 kg

6.2 cm

6 cm

7.2 cm

PAT LED 8162

PAT LED

aluminum, plastic PC

8162

cut out ø 56 mm



max 500 kg

6.5 cm

6 cm

6.3 cm

CIRCLET LED 8163

CIRCLET LED

aluminum, plastic PC

8163

cut out ø 57 mm

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9106	2W LED	3000K	60 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP67	10000h
9105	2W LED	3000K	80 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP67	10000h
9104	3W LED	3000K	200 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP67	10000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
4454	2W LED	3000K	100 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP67	10000h
8162	3W LED	3000K	12 lm	25 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h
8163	3W LED	3000K	120 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	⊕	>0.5	IP65	10000h

ANA 10499

ANA 10500

ANA 10501

ANA 10502

AMELIA 10495

AMELIA 10496

AMELIA 10497

AMELIA 10498

ANA
painted aluminum, plastic PC

■ 10499

1xE27, max 10W only LED

IP44

ANA
painted aluminum, plastic PC

■ 10500

1xE27, max 10W only LED

IP44

ANA
painted aluminum, plastic PC

■ 10501

1xE27, max 10W only LED

IP44

ANA
painted aluminum, plastic PC

■ 10502

1xE27, max 10W only LED

IP44

AMELIA
painted aluminum, plastic PC

■ 10495

1xE27, max 10W only LED

IP44

AMELIA BL
painted aluminum, plastic PC

■ 10496

1xE27, max 10W only LED

IP44

AMELIA
painted aluminum, plastic PC

■ 10497

1xE27, max 10W only LED

IP44

AMELIA
painted aluminum, plastic PC

■ 10498

1xE27, max 10W only LED


IP44



AMUR 4692



TAY 5292

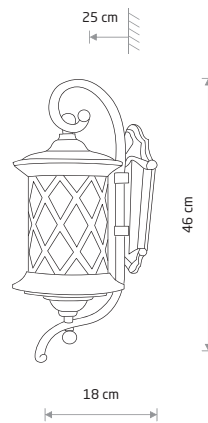

LANTERN


painting aluminum, plastic PC

6911

1xE27, max 25W only LED
IP23



LANTERN 6911




AMUR

painting aluminum, glass

4692

1xE27, max 25W only LED
IP23




TAY

painting aluminum, glass

5292

1xE27, max 25W only LED
IP23

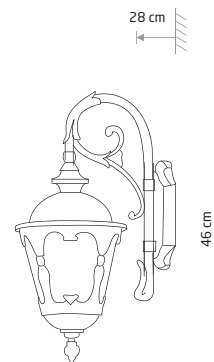

TYBR


painting aluminum, glass

4686

1xE27, max 25W only LED
IP44



TYBR 4686

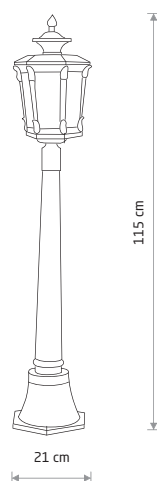


AMUR

painting aluminum, glass

4694

1xE27, max 25W only LED
IP44




TAY

painting aluminum, glass

5294

1xE27, max 25W only LED
IP23



DON

painting aluminum, glass

4687


1xE27, max 25W only LED
IP44



DON 4687



NOOK 7976




NOOK
plastic ABS, plastic PC

7972 7976 7978

1xE27, max 10W only LED

IP44



TAHOE II
plastic PC, plastic ABS


10035 10037 10038

2xE27, max 15W only LED

IP44



TAHOE II 10038

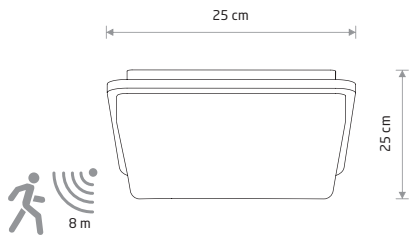

TAHOE SENSOR
plastic PC, plastic ABS

10040

2xE27, max 15W only LED

IP44



TAHOE SENSOR 10040




FESTOON LIGHTS 9 M 7872

FESTOON LIGHTS 6 M 7873





MAX 2000W MAX 80m CONNECTABLE

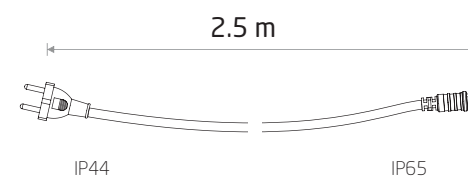

POWER CORD FOR
FESTOON LIGHTS
rubber cable

■ 7871

IP65



FESTOON LIGHTS 6M
rubber cable

■ 7873

● 10xE27, max 15W

IP65

FESTOON LIGHTS 9M
rubber cable

■ 7872

● 15xE27, max 15W

IP65



5 PC SET

BULB LED E27, A60 2W,
5 PC SET


glass

7487





BULB LED G9, 7W 9197




7.3 cm
2.1 cm

BULB LED G9, 7W
ceramic housing, plastic PC

9197 3000K 10933 4000K



BULB LED G9, 4W 7504




5 cm
1.65 cm

BULB LED G9, 4W
plastic PC

7503 3000K 7504 4000K



BULB LENS LED, G9, 3W 9173



5.2 cm
2.1 cm


BULB LENS LED, G9, 3W
ceramic housing, plastic PC

9173 3000K 8447 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
9197	7W LED	3000K	750 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
10933	7W LED	4000K	900 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
7503	4W LED	3000K	380 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	25000h
7504	4W LED	4000K	390 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	25000h
9173	3W LED	3000K	330 lm	90 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
8447	3W LED	4000K	310 lm	90 °	>80	~220-230 V, 50/60 Hz	>0.5	25000h



REFLECTOR LED, GU10, R35, 4W 10230




4.6 cm
3.5 cm

REFLECTOR LED, GU10, R35, 4W
plastic PC

10230 3000K 10231 4000K



REFLECTOR LED, GU10, R50, 7W 8347



5.4 cm
5 cm

REFLECTOR LED, GU10, R50, 7W
plastic PC


9180 3000K 9178 4000K
8348 3000K 8347 4000K



DIMMABLE



REFLECTOR LED, GU10, R50, 7W, DIMMABLE 10995




5.4 cm
5 cm

REFLECTOR LED, GU10, R50, 7W, DIMMABLE
plastic PC

10996 3000K 10998 4000K
10995 3000K 10997 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
9180	7W LED	3000K	600 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	>0.7	25000h
9178	7W LED	4000K	600 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	>0.7	25000h
8348	7W LED	3000K	600 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	>0.7	25000h
8347	7W LED	4000K	600 lm	50 °	≥ 80	~220-230 V, 50/60 Hz	>0.7	25000h
10230	4W LED	3000K	370 lm	70 °	>80	~220-230 V, 50/60 Hz	>0.5	20000h
10231	4W LED	4000K	400 lm	70 °	>80	~220-230 V, 50/60 Hz	>0.5	20000h
10995	7W LED	3000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10996	7W LED	3000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10997	7W LED	4000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h
10998	7W LED	4000K	600 lm	50 °	>80	~220-230 V, 50/60 Hz	>0.7	25000h




BULB GLASS BALL LED,
E27, 8W

glass

9177 3000K

BULB GLASS BALL LED, E27, 8W
9177




BULB LED E14, T25, 4W

glass

11525 3000K

BULB LED, E14, T25, 4W
11525




BULB LED GX53, 8W

plastic PC

8377 3000K 8378 4000K

BULB LED, GX53, 8W
8378

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
8377	8W LED	3000K	680 lm	100 °	>80	~220-230 V, 50/60 Hz	>0.5	25000h
8378	8W LED	4000K	700 lm	100 °	>80	~220-230 V, 50/60 Hz	>0.5	25000h
9177	8W LED	3000K	840 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
11525	4W LED	3000K	400 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h




REFLECTOR LENS LED, GU10, ES111, 9W
9345

REFLECTOR LENS LED,
GU10, ES111, 9W

plastic

9343 3000K 9213 4000K

9345 3000K 9214 4000K



REFLECTOR DIFFUSER LED, GU10, ES111, 9W
9211


REFLECTOR DIFFUSER
LED, GU10, ES111, 9W

plastic


9342 3000K 9211 4000K

9344 3000K 9212 4000K


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
9343	9W LED	3000K	770 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9213	9W LED	4000K	870 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9345	9W LED	3000K	870 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9214	9W LED	4000K	930 lm	30 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9342	9W LED	3000K	790 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9211	9W LED	4000K	900 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9344	9W LED	3000K	790 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h
9212	9W LED	4000K	900 lm	120 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	25000h




BULB VINTAGE LED
E27, 6W
glass
10596




BULB VINTAGE LED
E27, 6W
glass
10594




BULB LED E14,
C35, 6W
glass
10589




BULB LED E27,
A60, 7W
glass
10587



BULB LED E27,
A60, 10W
glass
10588



BULB VINTAGE LED
E27, 6W
glass
10593



BULB VINTAGE LED
E27, 6W
glass
10595



5 PC SET

BULB LED E27, A60
2W, 5 PC SET
glass
7487

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
10596	6W LED	2200K	580 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h
10594	6W LED	2200K	560 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h
10593	6W LED	2200K	550 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h
10595	6W LED	2200K	450 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Power factor	Lifetime
10589	6W LED	3000K	650 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h
10587	7W LED	3000K	800 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h
10588	10W LED	3000K	1100 lm	360 °	≥ 80	~220-230 V, 50/60 Hz	>0.5	15000h
7487	2W LED	2200K	160 lm	360 °	≥80	~220-230 V, 50/60 Hz	>0.5	15000h



TUBE LED T8, 11W

glass

7500



TUBE LED T8, 16W

glass

7501




TUBE LED T8, 22W

glass

7502

Item No.	Power	Colour temp.	Leds	Luminous flux	Beam angle	Colour Rendering Index (CRI ≥)	Input	Power factor	Lifetime
7500	11W LED	3000K	SMD2835	1700 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0.5	30000h
7501	16W LED	3000K	SMD2835	2300 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0.5	30000h
7502	22W LED	3000K	SMD2835	3200 lm	120 °	≥80	~220-230 V, 50/60 Hz	>0.5	30000h




WATERPROOF CONNECTOR IP68

plastic PA

8845

IP68

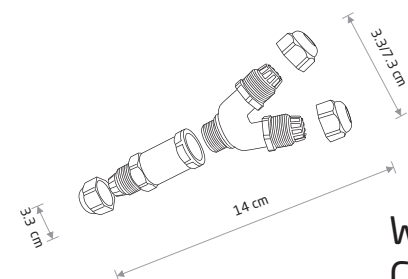


WATERPROOF „Y“ CONNECTOR IP68

plastic PA

8846


IP68




MICROWAVE SENSOR

plastic


8821




**48V DC, 80W,
POWER SUPPLY**
plastic
11301

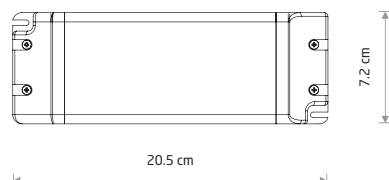


**48V DC, 200W,
POWER SUPPLY**
plastic
11287

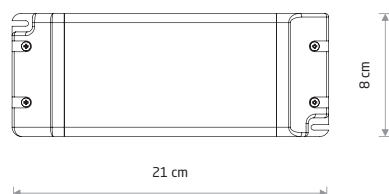


**48V DC, 320W,
POWER SUPPLY**
plastic
11278

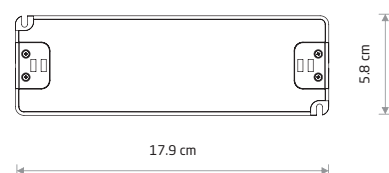


**24V DC, 150W,
POWER SUPPLY**
plastic
11874

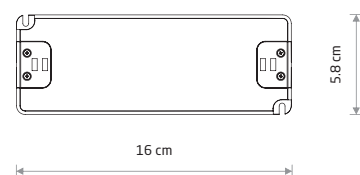

**24V DC, 75W,
POWER SUPPLY**
plastic
11875



HONEY COMB
aluminum, plastic PA
11427




Filtr przeciwośnieniowy "plaster miodu".
Do zastosowania z kolekcją lamp MONO.

Anti-glare "honeycomb".
For use with the MONO lamp collection.


ACROBAT
painted steel

11794 11795
11796 11797



BALLERINA
painted steel

11798 11800
11801 11802

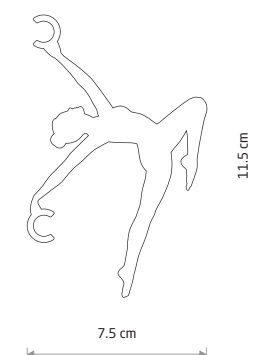

INFORMACJE DLA KLIENTA / CUSTOMER INFORMATION

Informacje ogólne / General information

Rzeczywiste parametry produktów mogą się różnić od wartości deklarowanych w katalogu o +/- 10%.

Zdjęcia prezentowanego asortymentu w niniejszym katalogu mają charakter poglądowy.
Rzeczywisty kolor produktów może nieznacznie odbiegać od prezentowanego na zdjęciach, ze względu na technologię druku.

The actual product parameters may differ from the values declared in the catalogue by +/- 10%.

Photos in this catalogue are for illustrative purposes only.
The actual color of the products may slightly differ from that shown in the photos, due to the printing technology.


Informacje techniczne / Technical information

Temperatura barwowa (K) - w potocznym rozumieniu, to „kolor” światła białego emitowanego przez źródło, np. źródło LED.
W uproszczeniu możemy podzielić je na światło o:

- barwie ciepłej
- barwie neutralnej
- barwie zimnej

Colour temperature (K) in common understanding is the colour of white light emitted by a source, for example such as an LED source.
In simple terms, we can divide them into:

- Warm white
- White
- Cool white

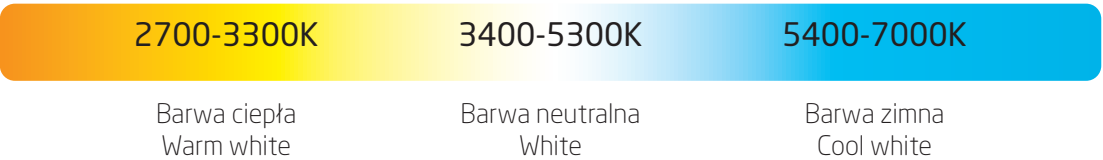

Strumień świetlny (lm/lumen) - w potocznym rozumieniu, to całkowita moc światła emitowanego z danego źródła światła.
Lumen (lm) - jednostka miary strumienia świetlnego w układzie SI
1 lm = 1 cd·sr

Luminous flux (lm / lumen) - the total power of light emitted from a light source.
Lumen (symbol: lm) - the unit of luminous flux in SI system.
1 lm = 1 cd·sr

Natężenie oświetlenia (lx/luks) - w potocznym rozumieniu, to gęstość strumienia świetlnego padającego na daną powierzchnię.
Luks (lx) - jednostka natężenia oświetlenia w układzie SI.
1 lx = 1 cd·sr / m²

Illuminance (lx / lux) - in common understanding, it is the density of the luminous flux incident on a given surface.
Lux (lx) - a unit of illuminance in the SI system.
1 lx = 1 cd sr / m²

CRI (od ang. colour rendering index), Ra - wskaźnik oddawania barw charakteryzujący źródło światła, który określa, jak dobrze postrzegane są barwy oświetlonych przedmiotów.
Im wskaźnik ten jest wyższy, tym barwy są lepiej oddawane, a oświetlane przedmioty wyglądają naturalniej.
Wyrażony jest liczbą z przedziału od 0 do 100, gdzie 100 to światło słoneczne.
Minimum wg przepisów w UE dla opraw wewnętrznych to 80.

CRI- is an index of a light source’s ability to reveal colours. It determines how well illuminated colours are perceived.
The higher index, the better colour rendering and the illuminated objects look more natural.
It is expressed with a number from 0 to 100, where 100 is a sunlight.
The minimum according to EU regulations for indoor luminaires is 80.

Stopień ochrony IP / Degree of protection IP

Stopień ochrony jest wyrażony dwoma cyframi. Pierwsza oznacza ochronę przed ciałami stałymi. Druga to ochrona przed cieczami.

Degree of protection is expressed by two figures. The first one stands for protection against solid particles. The second one stands for protection against liquids.

1 cyfra / 1st figure	
IP0...	Brak ochrony / Not protected
IP1...	Ochrona przed ciałami stałymi większymi niż 50 mm / Protected against solid objects greater than 50 mm
IP2...	Ochrona przed ciałami stałymi większymi niż 12 mm / Protected against solid objects greater than 12 mm
IP3...	Ochrona przed ciałami stałymi większymi niż 2,5 mm / Protected against solid objects greater than 2,5 mm
IP4...	Ochrona przed ciałami stałymi większymi niż 1 mm / Protected against solid objects greater than 1 mm
IP5...	Ochrona przed pyłem / Protected against dust infiltration
IP6...	Ochrona pyłoszczelna / Totally protected against dust infiltration

2 cyfra / 2nd figure	
IP...0	Brak ochrony / Not protected
IP...1	Ochrona przed padającymi kroplami wody / Protected against vertically falling water drops
IP...2	Ochrona przed padającymi kroplami wody przy wychyleniu do 15° / Protected against falling water drops up to 15° from the vertica
IP...3	Ochrona przed natryskiwaną wodą / Protected against rain
IP...4	Ochrona przed bryzgami wody / Protected against splashing water
IP...5	Ochrona przed strugami wody / Protected against water jets
IP...6	Ochrona przed falami / Protected against powered water jets
IP...7	Ochrona przed zanurzeniem / Protected against temporary immersion
IP...8	Ochrona przed głębokim zanurzeniem / Protected against continuous immersion

IKONY / ICONS

	Lampa wisząca / Pendant lamp		Kinkiet / Wall lamp		Kinkiet podtynkowy / Recessed wall lamp		
	Lampa sufitowa / Ceiling lamp		Oświetlenie punktowe / Spotlight		Źródło światła / Light source		
	Lampa biurkowa / Table lamp		Podtynkowa lampa sufitowa / Recessed ceiling lamp		Tuba ledowa / Led tube		
	Lampa podłogowa / Floor lamp		Lampa najazdowa / Overrun lamp				Wyciąć / Cut out

- 

Oprawy oznaczone tym symbolem nie wolno okrywać materiałem termoizolacyjnym.
Fittings marked with this symbol must not be covered with thermal insulation materials.
- 

Klasa ochronna druga oznacza, że oprawa posiada podwójną izolację ochronną, a przewód ochronny (żyła żółto-zielona) nie może być podłączony do oprawy oświetleniowej.
Protection class II means that the fittings are equipped with a double protective insulation, and the green and yellow protective conductor must not be connected to the fitting.
- 

Klasa ochronna pierwsza oznacza, że oprawa musi być podłączona za pomocą przewodu ochronnego (żyła żółto-zielona) do przewodu lub zacisku uziemiającego.
Protection class I means that the fitting must be connected with the yellow and green protective conductor to the grounding wire or terminal.
- 

Klasa ochronna III oznacza, bezpieczeństwo elektryczne gwarantowane przez bardzo niskie zasilanie (poniżej 50 V). Bez uziemienia.
Protection class III means, that electrical safety is guaranteed by a very low power supply (less than 50 Volt). No grounding.
- 

Oprawy oznaczone tym symbolem wolno instalować wyłącznie na podłożach niepalnych.
Fittings marked with this symbol are suitable for installation only on nonflammable surfaces.
- 

Zgodność produktów z ukraińskimi normami.
Ukrainian standards compliant.
- 

Zgodność z normami Unii Europejskiej.
EU standards compliant.
- 

Zgodność produktów z normami Euroazjatyckiej Unii Gospodarczej.
EAEU standards compliant.
- 

Do użytku zewnętrznego.
Exterior use only.
- 

Do wewnętrznego użytku.
Interior use only.
- 











Do stosowania wewnątrz i na zewnątrz.
Interior and exterior use.




Zużyte oprawy oświetleniowe są surowcami wtórnymi - nie wolno wyrzucać ich do pojemników na odpady domowe, mogą zawierać substancje niebezpieczne dla zdrowia i życia ludzkiego oraz środowiska. Zgodnie z dyrektywą WEEE 2012/19/UE użytkownik zobowiązany jest do oddania opraw do punktu zbierania zużytego sprzętu, co przyczyni się do ochrony środowiska naturalnego.
Used lighting fixtures are recyclable materials - they must not be disposed of in household waste containers as they may contain substances hazardous to human health or life as well as to the natural environment. In accordance with Regulation WEEE 2012/19 /EU, luminaire user is obliged to return a used lighting fixture to a waste appliance collection point, which will contribute to the protection of the natural environment.

Material	Materiał
Acrylic crystals	Kryształki akrylowe
Aluminum	Aluminium
Braided cable	Przewód w oplocie
Brass plated steel	Stal mosiądzowana
Brushed stainless steel	Stal nierdzewna szczotkowana
Ceramic housing	Ceramiczna oprawka
Chrome	Chrom
Chrome plated steel	Stal chromowana
Composite	Kompozyt
Concrete	Beton architektoniczny
Copper plated steel	Stal miedziana
Crystal	Kryształ
Fabric	Tkanina
Flexible stem	Peszel
Glass	Szkło
Gypsum	Gips
Metallized glass	Szkło metalizowane
Painted aluminum	Aluminium lakierowane
Painted steel	Stal lakierowana
Plastic	Tworzywo sztuczne
Plastic ABS	Tworzywo sztuczne ABS
Plastic PA	Tworzywo sztuczne PA
Plastic PC	Tworzywo sztuczne PC
Plastic PP	Tworzywo sztuczne PP
Plastic PS	Tworzywo sztuczne PS
Plastic PC/ABS	Tworzywo sztuczne PC/ABS
Plastic PE	Tworzywo sztuczne PE
Plastic PMMA	Tworzywo sztuczne PMMA
Plywood	Sklejka
Rubber cable	Przewód gumowy
Silicone	Silikon
Solid brass	Lity mosiądz
Steel	Stal
Velvet	Aksamit
Wood	Drewno

KODY KOLORÓW / COLOUR CODES

			
P001 / RAL 9003	P003 / RAL 9003	P004 / RAL 9003	P005
			
P010 / RAL 7016	P013 / RAL 9005	P014 / RAL 9005	P015
			
P018	P020	P021	P022
			
P023	P024	P025	P026 / RAL 7044
			
P027 / RAL 7022	P028	P029	P030



P031



P032



P033




P034



P035



T003




T004




T005




T008



T011



T012



T013



T022



T023




T024



T025



T026



T029



T032



T033



T034



T035



T036



T037



T038



T039

A	BIT S	339
ABBY LED.....	BOHO L.....	235
ABI L	BOHO M	235
ACRE	BOHO S.....	235
ACROBAT	BOL	481
AGAVE.....	BRAVO	480
AGNES ROUND LED PRO	BRAZOS	472,473
AGNES SQUARE LED PRO	BRICK	547
ALICE.....	BULB LED E27, A60, 10W.....	585
ALICE L.....	BULB LED E27, A60, 7W	585
ALOE	BULB GLASS BALL LED, E27, 8W.....	582
ALPHA	BULB LED E14, C35, 6W	585
AMALFI.....	BULB LED E14, T25, 4W	582
AMALFI L	BULB LED E27, A60 2W, 5 PC SET	585
AMALFI M.....	BULB LED G9, 4W	580
AMARELA.....	BULB LED G9, 7W	580
AMARELA A.....	BULB LED GX53, 8W.....	582
AMARELA B.....	BULB LENS LED, G9, 3W	580
AMARELA L	BULB VINTAGE LED E27, 6W	584
AMARELA M	BUSH.....	566
AMARELA S		
AMELIA.....	C	
AMUR	CABO LED.....	547
AMY LED.....	CADILAC.....	180, 181
ANA.....	CAMELEON ADAPTER CTLS.....	435
ARALIA.....	CAMELEON ADAPTER PROFILE	455
ARENA	CAMERON	184, 185
ARENA LED	CANOE	294
ARENA SENSOR.....	CAYO	475
ARES.....	CEARA.....	478
ARIA LED L	CEDRO.....	163
ARIA LED M	CEDRO A.....	162
ARIA LED S	CEDRO B.....	162
ARIA LED XL	CEDRO L.....	160, 161
ARM LED L	CEDRO M	160, 161
ARM LED M	CEDRO S.....	160, 161
ARRIS	CERAMIC LED	138, 139
ASSAM	CEZANNE LED L	491
ASSOS.....	CEZANNE LED M	491
AVA LED	CEZANNE LED S.....	491
	CHARLIE.....	484
B	CHILLIN.....	198
BAHIA	CIRCLET LED	569
BALLERINA	CIRCOLO LED.....	25, 26, 27
BAR LED L	CIRCOLO LED M.....	24, 29, 32
BAR LED M.....	CIRCOLO LED S	24, 29, 32
BAR LED S	CIRCOLO LED XS.....	29
BASALT.....	CIRCOLO POWER LED	25, 26
BATON	CL DIA LED 18W.....	348
BAY LED	CL DIA LED 30W.....	348
BERGEN	CL IOS LED 20W, ANGLE 36	332
	CL IOS LED 20W, ANGLE 60	332

CL IOS LED 30W, ANGLE 36	333
CL IOS LED 30W, ANGLE 60	333
CL IOS LED 40W, ANGLE 60	333
CL KEA LED 20W	349
CL KEA LED 40W	349
CL KOS LED 10W	346
CL KOS LED 16W	346
CL KOS LED 24W	346
CL KOS LED 8W.....	346
CL OFFICE LED PRO 120	306
CL OFFICE LED PRO 150	307
CL OFFICE PRO/HALL PRO POWER SUPPLY KIT	306, 307
CL OFFICE PRO/HALL PRO SUSPENSION KIT.....	306, 307
CLAY M	141
CLAY S.....	141
CLINE LED	560
COBBLE.....	322
COMMA LED L	275
COMMA LED M	275
COMMA LED S.....	275
CRAFT.....	287
CRATE	282
CRES	340
CRISTAL	133
CRISTAL L.....	133
CRISTAL M.....	132
CTLS DEAD END CAP	439
CTLS MILO LED 15W	426
CTLS MILO LED 25W	427
CTLS MONO.....	435
CTLS NEA LED 20W.....	428
CTLS NEA LED 30W.....	429
CTLS NEA LED 40W.....	430
CTLS POWER END CAP, LEFT (PE-L)	438
CTLS POWER END CAP, RIGHT (PE-R).....	438
CTLS POWER FLEX CONNECTOR	439
CTLS POWER L CONNECTOR, LEFT (L-L)	438
CTLS POWER L CONNECTOR, RIGHT (L-R).....	438
CTLS POWER STRAIGHT CONNECTOR	438
CTLS POWER SUPPLY KIT 3 CIRCUIT	437
CTLS POWER T CONNECTOR, LEFT 1 (T-L1).....	439
CTLS POWER T CONNECTOR, LEFT 2 (T-L2).....	439
CTLS POWER T CONNECTOR, RIGHT 1 (T-R1)	439
CTLS POWER T CONNECTOR, RIGHT 2 (T-R2)	439
CTLS POWER X CONNECTOR	439
CTLS RECESSED DEAD END CAP	443
CTLS RECESSED FIXING SET.....	443
CTLS RECESSED POWER END CAP, LEFT (PE-L).....	442
CTLS RECESSED POWER END CAP, RIGHT (PE-R)	442
CTLS RECESSED POWER FLEX CONNECTOR.....	443
CTLS RECESSED POWER L CONNECTOR, LEFT (L-L).....	442
CTLS RECESSED POWER L CONNECTOR, RIGHT (L-R)	442
CTLS RECESSED POWER STRAIGHT CONNECTOR.....	442

CTLS RECESSED POWER T CONNECTOR, LEFT 1 (T-L1)	443
CTLS RECESSED POWER T CONNECTOR, LEFT 2 (T-L2)	443
CTLS RECESSED POWER T CONNECTOR, RIGHT 1 (T-R1)...	443
CTLS RECESSED POWER T CONNECTOR, RIGHT 2 (T-R2)...	443
CTLS RECESSED POWER X CONNECTOR	443
CTLS RECESSED TRACK 3 CIRCUIT 1M	440
CTLS RECESSED TRACK 3 CIRCUIT 2M	440
CTLS SNOWBALL	434
CTLS STRAIGHT CONNECTOR MINI.....	439
CTLS SUSPENSION KIT 3 CIRCUIT.....	437
CTLS TINOS LED 10W.....	432
CTLS TINOS LED 20W.....	432
CTLS TINOS LED 30W.....	433
CTLS TRACK 3 CIRCUIT 1M.....	436
CTLS TRACK 3 CIRCUIT 2M.....	436
CUMULUS CUBE L	502
CUMULUS CUBE M.....	502
CUMULUS L	498, 499
CUMULUS M.....	498, 499
CUMULUS S.....	498, 499
CUMULUS XL.....	498
CUP	343
CUP 3 PC SET	343
CYLINDER L.....	100
CYLINDER M	100

D	
DELTA	484
DEMI LED L	533
DEMI LED M.....	533
DISK.....	218
DON.....	573
DOT	353
DOVER	226, 227
DOWNLIGHT ES111	351
DROPS WOOD A	205
DROPS WOOD B	205
DROPS WOOD C	202
DROPS WOOD D.....	202
DROPS WOOD E	203
DROPS WOOD F	203

E	
EASY LED LEFT.....	46
EASY LED RIGHT	46
ECHO.....	485
EDESA LED M	545
EDESA LED S	545
EGG L.....	295
EGG M.....	295
EGG XL	295

EGINA LED 10W 345
EGINA LED 15W 345
EGINA LED 5W 345
ELLIPSES LED 536
EXE 543
EYE 97, 102
EYE FLEX 103
EYE FLEX S 103
EYE L 96, 98, 101
EYE M 96, 101
EYE MOD 352
EYE S 101
EYE SPOT 104, 105
EYE SUPER 106-109
EYE SUPER A 107
EYE SUPER B 107
EYE TONE 337, 338
EYE WALL 102
EYE WALL CUT 102

F

FALCON 189
FESTOON LIGHTS 6m 577
FESTOON LIGHTS 9m 577
FLEA 335
FLOWERPOT L 500
FLOWERPOT M 500
FLOWERPOT S 500
FOCUS MINI LED 330
FOG 542
FORM L 183
FORM M 183
FOURTY 70, 71, 74, 76, 77
FOURTY L 72
FOURTY M 72, 73
FOURTY S 72, 73
FOURTY SURFACE 76
FOURTY WALL M 74
FOURTY WALL S 74
FOURTY WALL XL 75
FOURTY XL 72
FOXTROT 482

G

GAP 322
GARRET 289
GARRET M 289
GARRET S 289
GIAVELLOTTO LED L 37
GIAVELLOTTO LED M 37
GIAVELLOTTO LED S 37

GIOTTO LED M 297
GIOTTO LED S 297
GLOBE PLUS 123
GLOBE PLUS M 123
GLOBE PLUS S 123
GOLF 485
GROOVE 322, 323

H

HAGA 269
HAITI L 234
HAITI M 234
HAITI S 234
HALO 334
HAMPTON 134
HANGING SET FOR PICNIC LED 550
HARMONY 284
HAVANA L 232, 233
HAVANA M 232, 233
HAVANA S 232, 233
HEFT 219
HELIOS LED 486
HEMISPHERE HIT L 292
HEMISPHERE HIT S 292
HEMISPHERE RUST L 290
HEMISPHERE RUST S 290
HEMISPHERE SUPER L 291, 293
HEMISPHERE SUPER S 291, 293
HERMANOS 261
HERMANOS A 260
HERMANOS B 260
HERMANOS C 260
HEXA 545
HIGH-BAY 288
HONEY COMB 589
HORN 522
HOTEL MOOD 192, 194
HOTEL MOOD LED 192
HOTEL PLUS 196
HVAR 341

I

ICE BALL 466
ICE EGG A 474
ICE EGG C 474
ICE TUBE LED M 470, 471
ICE TUBE LED S 470, 471
IDA 511
IKA A 223
IKA D 223
IMBRIA 112

IMPULSE LED L 52
IMPULSE LED M 52
IMPULSE LED S 53
INA 564
INDIA 335
ION LED L 305
ION LED M 305
IRIS LED 299
ISLA LED 532

J

JAPANDI M 236
JAPANDI S 236
JULIET 486

K

KARO 116, 117
KASAI 317
KHUMBU 549
KIER L 121
KIER M 121
KIER S 121
KRABI 237
KYMI A 222
KYMI B 222
KYMI C 222

L

LAGO 169
LAGO A 168
LAGO B 168
LAGO L 166, 167
LAGO M 166, 167
LAGO S 166, 167
LAGUNA 179
LANTERN 573
LASER 1000 61, 62, 63
LASER 490 60, 62, 63
LASER 750 62, 63, 64
LASER 900 64
LASER WALL 67
LASER WALL L 66
LATH LED 489
LENS LED 539
LHOTSE LED 513
LIA LED 299
LID ROUND LED 15W 313
LID ROUND LED 25W 313
LID ROUND LED 35W 313
LID ROUND LED 50W 313

LID SQUARE LED 15W 314
LID SQUARE LED 25W 314
LID SQUARE LED 35W 314
LID SQUARE LED 50W 314
LINEO LED 34
LIV LED 509
LUKSOR S 243
LUSSO 199
LUXORA LED 130, 131
LVM 48V, 150W, INSIDE POWER SUPPLY 418, 422
LVM CORNER CONDUCTIV 422
LVM CORNER CONDUCTIVE MODULE 419
LVM FOCUS LED 15W 400
LVM FOCUS LED 9W 401
LVM FOCUS OUT LED 15W 402
LVM FOCUS OUT LED 9W 403
LVM HORIZONTAL CORNER 419
LVM INSIDE CORNER 419
LVM LID LED 8W 410
LVM LINE LED 15W 404
LVM LINE LED 9W 405
LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODULE 419, 422
LVM POWER SUPPLY KIT 417
LVM RECESSED HORIZONTAL CORNER 423
LVM RECESSED INSIDE CORNER 423
LVM RECESSED TRACK 1M 420
LVM RECESSED TRACK 2M 420
LVM ROLLER LED 9W 408
LVM SLOT LED 5W 411
LVM SLOT LED 8W 411
LVM SPOT LED 15W 406
LVM SPOT LED 9W 407
LVM STRAIGHT CONDUCTIVE MODULE 419, 422
LVM SUSPENSION KIT 417
LVM TRACK 1M 416
LVM TRACK 2M 416
LVM TRACK BUCKLE CONNECTOR 419, 422

M

MAHE LED 555
MALAKKA LED 477
MALMO 269
MARGOT 538
MAUN 481
MEKONG 526
MERIDA LED 556
MIA LED L 510
MIA LED M 510
MICROWAVE SENSOR 587
MIDI LED 324, 325
MIDI LED RECESSED 326
MINI LED RECESSED 329

MINIMAL..... 228
MIST 182
MISTRAL..... 527
MLJET 340
MOD..... 350
MOD PLUS..... 350
MON LED 569
MONACO..... 144, 145
MONO 82, 83, 86, 89, 94, 95
MONO 2x150 86
MONO 2x200 86
MONO CORNER 2x150..... 87
MONO CORNER 2x200..... 87
MONO DEEP 92
MONO LONG 88
MONO LONG M 88
MONO S 81
MONO SLIDE..... 93
MONO SLIDE TRIMLESS..... 93
MONO SURFACE..... 90, 91
MONTERREY LED..... 516
MORE EYE 110
MORE TONE..... 111
MOSS..... 197
MOTIVE LED L..... 42
MOTIVE LED M 42
MULTI LED..... 308
MUNO LED..... 549
MURTER..... 340
MYKONOS LED 10W 344
MYKONOS LED 15W 344
MYKONOS LED 18W 344
MYKONOS LED 24W 344
MYKONOS LED 6W..... 344

N

NALA LED..... 554
NANO - LVM CORNER CONDUCTIVE MODULE 375, 378
NANO - LVM CURVE TRACK R400..... 372
NANO - LVM FLEX LINE LED 6W 365
NANO - LVM FOCUS OUT LED 10W..... 360
NANO - LVM FOCUS OUT LED 5W 361
NANO - LVM HORIZONTAL CORNER 375
NANO - LVM INSIDE CORNER 375
NANO - LVM LINE IN LED 6W 364
NANO - LVM LINE OUT LED 10W..... 363
NANO - LVM LINE OUT LED 20W..... 362
NANO - LVM MUG LED 7W..... 367
NANO - LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODU-
LE..... 375, 378
NANO - LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODULE
FOR SUSPENSION TRACK 373

NANO - LVM RECESSED HORIZONTAL CORNER..... 378
NANO - LVM RECESSED INSIDE CORNER..... 378
NANO - LVM RECESSED OUTSIDE POWER SUPPLY CONDUCTIVE
MODULE FOR SUSPENSION TRACK 373
NANO - LVM RECESSED TRACK 1M..... 376
NANO - LVM RECESSED TRACK 2M..... 376
NANO - LVM SPOT LED 1W 366
NANO - LVM SPOT ZOOM LED 15W 369
NANO - LVM SPOT ZOOM LED 2W..... 368
NANO - LVM SPOT ZOOM LED 5W..... 368
NANO - LVM SPOT ZOOM LED 7W..... 369
NANO - LVM STRAIGHT CONDUCTIVE MODULE 375, 378
NANO - LVM SUSPENSION KIT 373
NANO - LVM TRACK 1M 372
NANO - LVM TRACK 2M 372
NANO - LVM TRACK BUCKLE CONNECTOR 375, 379
NATALIE 469
NEGRO 543
NEL LED 530
NESS..... 242
NEWPORT 135
NICO 541
NIKKI ROUND LED 310
NOOK 574
NORIN..... 522

O

OIA LED 565
OIR..... 525
ORBIT 263, 264, 265
ORGANIC 298
ORINOKO 546
ORLA LED M 531
ORLA LED S..... 531
ORTO..... 58
ORTO A..... 59
ORTO B..... 59
OSCAR..... 548
OSLO 30..... 228
OSLO LED 90..... 229
OTTAWA 520
OUTLINE LED L..... 558
OUTLINE LED M 558
OUTLINE LED S..... 558
OVAL..... 323

P

PAG 322
PALMAS LED 479
PAN LED M..... 477
PAN LED S 477

PANTOGRAPH..... 286
PAOLI 569
PARANA..... 480
PAT LED 569
PATHWAY FOUNDATION KIT..... 528
PATHWAY LED L..... 529
PATHWAY LED M 529
PATHWAY LED PRO 528
PATHWAY LED S..... 529
PATIO 503
PEAR..... 127
PEAR L 126
PEAR M..... 126
PEAR S 126
PICASSO LED..... 489
PICCO LED L..... 568
PICCO LED M..... 568
PICCO LED S..... 568
PICNIC LED..... 550
PIK 122
PILLS..... 266, 267
PIN LED L..... 488
PIN LED M 488
PIN LED S..... 488
PIX LED..... 557
PLANT..... 283
POINT DUO 248
POINT PLEXI L 339
POINT PLEXI M..... 339
POINT S 339
POINT TONE 334
POLARIS..... 142
POLE LED..... 518
POWER CORD FOR FESTOON LIGHTS..... 577
POWER SUPPLY COVER 375
POWER SUPPLY, 24V DC, 150W 588
POWER SUPPLY, 24V DC, 75W..... 588
POWER SUPPLY, 48V DC, 200W 588
POWER SUPPLY, 48V DC, 320W 588
POWER SUPPLY, 48V DC, 80W..... 588
PRIMM..... 540
PROFILE BIT 453
PROFILE BIT PLUS..... 453
PROFILE DEAD END CAP 459
PROFILE EYE..... 453
PROFILE EYE SPOT 454
PROFILE EYE SUPER A..... 452
PROFILE EYE SUPER C 452
PROFILE FLEX CONNECTOR 459
PROFILE FOCUS LED..... 450
PROFILE INDIA 450
PROFILE IRIS LED 12W..... 448
PROFILE IRIS LED 20W..... 449

PROFILE IRIS LED 7W 448
PROFILE L CONNECTOR..... 459
PROFILE MIKE..... 450
PROFILE MONO 454
PROFILE POWER END CAP 458
PROFILE POWER STRAIGHT CONNECTOR..... 458
PROFILE POWER SUPPLY KIT..... 457
PROFILE PUCK 454
PROFILE RECESSED DEAD END CAP..... 463
PROFILE RECESSED FIXING SET 463
PROFILE RECESSED FLEX CONNECTOR..... 463
PROFILE RECESSED L CONNECTOR..... 463
PROFILE RECESSED POWER END CAP 462
PROFILE RECESSED POWER STRAIGHT CONNECTOR 462
PROFILE RECESSED STRAIGHT CONNECTOR..... 463
PROFILE RECESSED T CONNECTOR 463
PROFILE RECESSED TRACK 1 METER..... 460
PROFILE RECESSED TRACK 2 METERS 460
PROFILE RECESSED X CONNECTOR 463
PROFILE SNOWBALL..... 452, 455
PROFILE STRAIGHT CONNECTOR 459
PROFILE SUSPENSION KIT 457
PROFILE T CONNECTOR..... 459
PROFILE TINOS LED 10W 446
PROFILE TINOS LED 20W 447
PROFILE TINOS LED 30W 447
PROFILE TINOS LED 7W..... 446
PROFILE TRACK 1 M..... 456
PROFILE TRACK 2 M..... 456
PROFILE VESPA 455
PROFILE X CONNECTOR..... 459
PROFILE ZOOM LED..... 451
PUEBLA LED 556
PUKET L..... 231
PUKET M 231
PUKET S..... 231
PUMPKIN L 241
PUMPKIN M..... 241
PUMPKIN S 240

Q

QUARTZ 546

R

RADIUS..... 276
RATTAN L..... 230
RATTAN M 230
RATTAN S..... 230
REFLECTOR DIFFUSER LED, GU10, ES111, 9W 583
REFLECTOR LED, GU10, R35, 4W 581
REFLECTOR LED, GU10, R50, 7W 581

REFLECTOR LED, GU10, R50, 7W, DIMMABLE..... 581

REFLECTOR LENS LED, GU10, ES111, 9W 583

RING LED L 272, 273

RING LED M 272, 273

RING LED S 272, 273

RING MIRROR LED L 271

RING MIRROR LED M..... 271

RING MIRROR LED S 271

RING TIMBER LED L..... 212

RING TIMBER LED M..... 212

RING TIMBER LED S 212

RING TIMBER LED XL 212

RING TIMBER LED XXL..... 212

RING WOOD LED L..... 216

RING WOOD LED M 216

RING WOOD LED S 216

RIO..... 524

RIO SENSOR 524, 525

ROCK PRO..... 544

RUBY LED..... 508

RUMI LED..... 567

S

SABER LED L.....45

SABER LED M44

SANTANA..... 153

SANTANA L..... 151

SANTANA M..... 150, 151

SANTANA A 152

SANTANA B 152

SANTANA S 150

SATELLITE L 259

SATELLITE M..... 258, 259

SATELLITE S 258, 259

SATELLITE S SENSOR 259

SEMI LED 537

SEMI LED M 537

SET 336, 585

SHINE 341

SIDEWALK ROUND LED 563

SIDEWALK SQUARE LED..... 563

SIERRA 544

SILBA 340

SILICONE 279

SIMI 473

SIMONE..... 246

SIS 475

SLASH LED.....49

SLIM LED 513

SLING 113

SLIT LED..... 512

SMART LED 319

SNOWBALL 120

SOFT CEILING LED 120X6..... 304

SOFT CEILING LED 60X20..... 304

SOFT CEILING LED 60X6 304

SOFT CEILING LED 60X60..... 304

SOFT CEILING LED 90X20..... 304

SOFT CEILING LED 90X6 304

SOFT LED 120X6..... 303

SOFT LED 90X6..... 303

SOFT WALL LED 60X6 302

SOFT WALL LED 90X6 302

SOLTA 341

SOUL..... 521

SPHERE 125

SPHERE L..... 124

SPHERE M 124

SPHERE S..... 124

SPHERE XL 124

SPIDER..... 280

SPIKE LED M 566

SPIKE LED S..... 566

SPIN LED L.....51

SPIN LED M51

SPIN LED S.....51

STALACTITE.....65

STAR 503

STEP LED 565

STONE L..... 496

STONE M 496

STONE S..... 496

STRAIGHT CEILING LED S..... 300

STRAIGHT CEILING LED L 300

STRAIGHT CEILING LED M..... 300

STRAIGHT WALL LED L..... 301

STRAIGHT WALL LED M..... 301

STRAIGHT WALL LED S 301

STRAIGHT WALL XS 301

STRUCTURE LED 514

SUN LED..... 211

SUNRISE LED 210

SUNSET 211

SUNSET A 208

SUNSET B 208

SUNSET C..... 208

SUNSET LED D 210

SUNSET NATURAL A..... 209

SUNSET NATURAL B..... 209

SUNSET NATURAL C..... 209

SYMMETRY LED 515

T

TAHOE II..... 575

TAHOE SENSOR 575

TAY..... 572

TECHNO 284, 285

TEPIC LED 516

TESSA LED..... 508

THIKA LED..... 517

THIKA LED B..... 517

TORCH 478

TRIANGLES LED 536

TUBE..... 299

TUBE LED T8, 11W 586

TUBE LED T8, 16W 586

TUBE LED T8, 22W 586

TUBINGS 523

TUBINGS M 523

TUBINGS S..... 523

TURDA 176, 177, 178

TUTOIA..... 171

TWIG 281

TYBR..... 573

U

UNIT LED 547

UNO L 342

UNO M..... 342

UNO S 342

UT-LVM 48V, 100W INSIDE POWER SUPPLY 397

UT-LVM 48V, 200W INSIDE POWER SUPPLY 397

UT-LVM END CAP..... 397

UT-LVM FOCUS LED 12W..... 383

UT-LVM FOCUS LED 18W..... 382

UT-LVM FOCUS OUT LED 12W..... 386

UT-LVM FOCUS OUT LED 6W 387

UT-LVM FOCUS SWING LED 12W..... 388

UT-LVM FOCUS SWING LED 6W 389

UT-LVM L CONNECTOR..... 397

UT-LVM LINE LED 12W..... 385

UT-LVM LINE LED 18W..... 384

UT-LVM OUTSIE POWER SUPPLY CONDUCTIVE MODULE... 397

UT-LVM ROLLER LED 10W 393

UT-LVM SPOT LED 12W..... 392

UT-LVM SPOT LED 5W 390

UT-LVM SPOT LED 9W 391

UT-LVM STRAIGHT CONNECTOR..... 397

UT-LVM TRACK 1M 395

UT-LVM TRACK 2M 395

UT-LVM VERTICAL CONNECTOR 397

V

VAN GOGH LED L54

VAN GOGH LED M54

VAN GOGH LED S.....54

VERTIC LED35

VETRO..... 146, 147

VIOLET 187

VIPER 188

VIS 341

VISTA 476

VIVIANE..... 186

W

WATERPROOF „Y” CONNECTOR IP68 587

WATERPROOF CONNECTOR IP68 587

WAVE S..... 242

WHEEL 214

WHEEL LUX..... 214, 215

WORKSHOP..... 278

WORKSHOP A..... 278

WORKSHOP B..... 278

WORKSHOP C..... 278

Z

ZENITH L 253, 254

ZENITH M..... 253, 254

ZENITH S 252, 254

ZENITH XS..... 252

ZOLA LED..... 507

ZURI LED 519

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE СТРАНИЦА	INDEX	STRONA PAGE СТРАНИЦА	INDEX	STRONA PAGE СТРАНИЦА	INDEX	STRONA PAGE СТРАНИЦА
203	296	4692	572	6345	301	6526	339
205	296	4694	572	6350	301	6528	339
206	296	4698	526	6367	290	6530	339
3394	527	4906	522	6368	290	6532	186
3401	566	4907	564	6390	186	6605	278
3402	542	4961	190	6391	186	6607	105
3403	542	4963	191	6403	279	6611	105
3404	542	5067	288	6404	279	6640	188
3408	547	5255	101	6442	289	6641	188
3411	546	5292	572	6443	289	6768	242
3412	564	5294	572	6444	289	6772	186
4171	223	5397	96	6481	97	6773	186
4174	223	5455	96	6487	107	6774	186
4387	546	5463	101	6488	107	6775	537
4418	526	5471	101	6490	107	6776	549
4420	526	5654	102	6491	108	6785	280
4422	544	6000	339	6492	109	6788	280
4423	524	6014	104	6493	106	6792	280
4424	524	6015	104	6501	107	6836	101
4425	543	6016	104	6502	107	6837	101
4443	549	6017	105	6503	107	6838	101
4446	522	6018	104	6504	108	6840	96
4448	513	6020	104	6505	109	6841	96
4453	564	6021	104	6506	106	6842	102
4454	569	6022	105	6512	188	6907	565
4686	573	6336	278	6513	188	6908	565
4687	573	6337	278	6525	339	6911	573

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
6913	299	7537	303	7595	301	7638	272
6948	472	7538	304	7596	301	7640	272
6950	472	7540	304	7597	300	7641	146
6951	472	7541	302	7598	300	7642	146
6976	498	7542	304	7600	300	7644	218
6977	498	7544	304	7601	301	7645	218
6978	498	7546	304	7603	339	7646	215
7017	524	7547	303	7605	123	7647	211
7487	585	7548	302	7606	123	7651	211
7500	586	7551	300	7607	123	7652	210
7501	586	7552	300	7614	133	7653	208
7502	586	7553	300	7616	132	7654	208
7503	580	7556	300	7618	450	7655	208
7504	580	7557	300	7620	450	7657	450
7520	229	7558	300	7621	450	7661	450
7522	229	7560	301	7622	450	7663	486
7524	304	7561	301	7623	451	7664	486
7525	303	7562	301	7624	451	7665	338
7526	304	7566	301	7625	451	7666	338
7527	304	7567	301	7626	451	7667	61
7528	302	7568	301	7627	132	7668	61
7530	304	7581	454	7630	133	7671	88
7531	304	7582	454	7633	133	7672	88
7533	304	7583	454	7634	272	7674	88
7534	302	7584	454	7635	272	7675	88
7535	303	7585	454	7636	272	7683	90
7536	304	7594	301	7637	272	7688	90

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
7694.....	86	7725.....	88	7784.....	83	7822.....	110
7695.....	87	7726.....	88	7785.....	86	7825.....	110
7696.....	86	7728.....	88	7786.....	89	7827.....	90
7697.....	87	7730.....	88	7787.....	89	7828.....	90
7698.....	86	7750.....	86	7788.....	125	7830.....	91
7700.....	87	7751.....	87	7790.....	322	7831.....	91
7701.....	86	7752.....	86	7791.....	322	7832.....	91
7702.....	87	7753.....	87	7792.....	322	7833.....	90
7703.....	95	7754.....	86	7793.....	322	7834.....	90
7704.....	95	7755.....	87	7794.....	127	7835.....	91
7705.....	94	7762.....	276	7797.....	126	7836.....	91
7706.....	95	7763.....	82	7798.....	126	7837.....	91
7707.....	95	7764.....	89	7800.....	126	7838.....	82
7708.....	94	7766.....	82	7801.....	265	7840.....	89
7710.....	95	7767.....	83	7802.....	264	7841.....	82
7711.....	95	7768.....	83	7803.....	264	7842.....	83
7712.....	94	7770.....	86	7804.....	265	7843.....	83
7713.....	95	7771.....	82	7805.....	264	7844.....	86
7714.....	95	7772.....	89	7806.....	264	7846.....	124
7715.....	94	7774.....	82	7807.....	82	7847.....	124
7716.....	95	7775.....	83	7808.....	89	7848.....	124
7717.....	95	7776.....	83	7810.....	82	7850.....	124
7718.....	94	7777.....	86	7811.....	83	7851.....	99
7720.....	86	7778.....	82	7812.....	83	7852.....	99
7721.....	87	7780.....	89	7813.....	86	7855.....	99
7722.....	86	7782.....	82	7814.....	111	7856.....	99
7723.....	87	7783.....	83	7817.....	111	7858.....	335

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
7860.....	335	7976.....	574	8022.....	259	8103.....	260
7862.....	97	7978.....	574	8023.....	259	8105.....	260
7863.....	97	7988.....	180	8024.....	259	8106.....	550
7864.....	100	7991.....	181	8030.....	261	8107.....	550
7865.....	100	7993.....	102	8032.....	261	8115.....	53
7867.....	100	7994.....	102	8047.....	67	8116.....	52
7868.....	100	7995.....	102	8048.....	67	8117.....	52
7871.....	577	7996.....	254	8050.....	476	8118.....	471
7872.....	577	7997.....	254	8051.....	476	8120.....	471
7873.....	577	7998.....	254	8052.....	473	8121.....	470
7926.....	294	8001.....	254	8054.....	475	8122.....	470
7927.....	294	8002.....	254	8055.....	475	8123.....	478
7931.....	276	8003.....	254	8056.....	473	8124.....	474
7932.....	276	8005.....	254	8057.....	473	8126.....	466
7938.....	264	8006.....	254	8072.....	102	8127.....	488
7941.....	263	8007.....	254	8073.....	102	8128.....	488
7942.....	263	8010.....	259	8074.....	102	8130.....	488
7943.....	264	8011.....	259	8084.....	439	8131.....	489
7945.....	263	8012.....	259	8085.....	439	8132.....	474
7946.....	263	8013.....	259	8086.....	338	8140.....	536
7950.....	189	8014.....	259	8087.....	338	8141.....	536
7951.....	189	8015.....	259	8088.....	338	8142.....	536
7952.....	317	8016.....	259	8091.....	338	8143.....	536
7958.....	187	8017.....	259	8092.....	338	8145.....	514
7960.....	187	8018.....	259	8093.....	338	8146.....	514
7961.....	187	8020.....	259	8100.....	260	8147.....	563
7972.....	574	8021.....	259	8102.....	260	8148.....	563

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
8154.....	134	8195.....	334	8243.....	439	8305.....	298
8155.....	134	8196.....	334	8244.....	439	8306.....	443
8156.....	135	8197.....	198	8245.....	443	8308.....	67
8157.....	135	8201.....	198	8246.....	443	8330.....	543
8158.....	523	8202.....	335	8247.....	443	8331.....	543
8160.....	523	8203.....	335	8248.....	443	8347.....	581
8161.....	523	8213.....	198	8250.....	306	8348.....	581
8162.....	569	8216.....	198	8250.....	307	8351.....	65
8163.....	569	8221.....	334	8262.....	267	8352.....	65
8164.....	562	8222.....	334	8263.....	267	8355.....	65
8165.....	562	8223.....	334	8264.....	266	8358.....	319
8168.....	297	8224.....	334	8265.....	266	8360.....	455
8170.....	297	8225.....	334	8266.....	266	8361.....	455
8171.....	305	8227.....	438	8267.....	267	8362.....	481
8172.....	305	8228.....	438	8268.....	267	8363.....	481
8173.....	477	8230.....	442	8270.....	266	8364.....	480
8174.....	477	8231.....	442	8281.....	435	8365.....	480
8175.....	489	8232.....	438	8282.....	435	8366.....	484
8176.....	515	8233.....	438	8283.....	437	8367.....	484
8177.....	550	8234.....	442	8284.....	437	8368.....	484
8178.....	550	8235.....	442	8288.....	306	8370.....	484
8180.....	515	8236.....	439	8288.....	307	8371.....	485
8182.....	536	8237.....	439	8290.....	306	8372.....	485
8190.....	180	8238.....	443	8291.....	306	8373.....	482
8191.....	181	8240.....	443	8302.....	298	8374.....	482
8192.....	260	8241.....	439	8303.....	298	8375.....	485
8194.....	260	8242.....	439	8304.....	298	8376.....	485

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
8377.....	582	8684.....	442	8714.....	436	8774.....	346
8378.....	582	8685.....	442	8715.....	436	8775.....	346
8381.....	143	8686.....	442	8716.....	436	8776.....	346
8382.....	459	8687.....	443	8717.....	436	8777.....	346
8383.....	459	8688.....	443	8720.....	348	8778.....	346
8384.....	463	8690.....	442	8722.....	348	8780.....	346
8385.....	463	8691.....	442	8724.....	333	8781.....	346
8397.....	555	8692.....	440	8727.....	333	8782.....	346
8398.....	555	8693.....	440	8731.....	333	8794.....	145
8430.....	214	8694.....	440	8732.....	333	8795.....	528
8431.....	63	8695.....	440	8738.....	332	8796.....	63
8432.....	63	8696.....	437	8740.....	332	8797.....	63
8433.....	63	8697.....	437	8741.....	332	8798.....	63
8434.....	63	8698.....	439	8742.....	332	8800.....	96
8435.....	63	8700.....	439	8743.....	332	8802.....	177
8436.....	63	8701.....	439	8747.....	430	8805.....	463
8447.....	580	8702.....	439	8752.....	429	8816.....	104
8671.....	126	8703.....	439	8756.....	428	8817.....	104
8672.....	126	8704.....	439	8757.....	428	8818.....	104
8673.....	126	8705.....	438	8762.....	427	8819.....	105
8676.....	443	8706.....	438	8763.....	426	8820.....	105
8677.....	443	8707.....	438	8764.....	426	8821.....	587
8678.....	443	8708.....	438	8765.....	426	8823.....	453
8680.....	443	8710.....	439	8766.....	426	8824.....	455
8681.....	443	8711.....	439	8767.....	349	8825.....	455
8682.....	443	8712.....	438	8772.....	349	8826.....	353
8683.....	442	8713.....	438	8773.....	349	8834.....	463

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
8835.....	463	8926.....	337	8967.....	463	9015.....	460
8836.....	463	8928.....	337	8968.....	463	9018.....	453
8837.....	463	8930.....	337	8970.....	463	9021.....	295
8845.....	587	8931.....	337	8971.....	463	9022.....	295
8846.....	587	8932.....	337	8972.....	462	9023.....	295
8851.....	243	8934.....	103	8973.....	462	9024.....	295
8858.....	242	8935.....	103	8974.....	463	9025.....	295
8864.....	243	8937.....	352	8975.....	463	9026.....	295
8895.....	336	8938.....	352	8991.....	486	9028.....	214
8896.....	336	8940.....	352	8992.....	486	9033.....	214
8898.....	336	8942.....	182	8993.....	299	9045.....	282
8900.....	336	8943.....	182	8994.....	299	9046.....	282
8901.....	336	8944.....	182	8995.....	448	9047.....	282
8911.....	101	8945.....	176	8996.....	448	9054.....	65
8912.....	101	8946.....	178	8997.....	448	9056.....	142
8913.....	101	8947.....	178	8998.....	448	9057.....	142
8914.....	96	8950.....	177	9000.....	448	9058.....	142
8915.....	98	8952.....	176	9001.....	448	9060.....	142
8916.....	98	8953.....	178	9002.....	448	9067.....	103
8917.....	98	8954.....	179	9003.....	448	9068.....	103
8918.....	60	8955.....	177	9004.....	449	9070.....	103
8920.....	60	8957.....	179	9005.....	449	9071.....	196
8921.....	60	8958.....	176	9006.....	449	9072.....	196
8922.....	60	8960.....	178	9007.....	449	9084.....	190
8923.....	60	8962.....	179	9012.....	460	9091.....	190
8924.....	60	8965.....	502	9013.....	460	9097.....	525
8925.....	337	8966.....	502	9014.....	460	9100.....	566

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
9101.....	566	9153.....	143	9263.....	226	9403.....	350
9102.....	565	9154.....	143	9264.....	226	9404.....	350
9103.....	565	9155.....	143	9266.....	227	9407.....	350
9104.....	568	9158.....	525	9316.....	323	9408.....	350
9105.....	568	9173.....	580	9317.....	299	9412.....	350
9106.....	568	9177.....	582	9320.....	299	9413.....	350
9107.....	545	9178.....	581	9321.....	454	9416.....	350
9108.....	545	9180.....	581	9322.....	454	9417.....	350
9111.....	545	9185.....	518	9324.....	452	9420.....	529
9112.....	539	9186.....	459	9325.....	452	9426.....	503
9113.....	539	9187.....	459	9337.....	453	9448.....	456
9118.....	517	9188.....	459	9338.....	453	9450.....	456
9120.....	517	9190.....	459	9342.....	583	9451.....	456
9122.....	547	9192.....	112	9343.....	583	9452.....	456
9123.....	540	9197.....	580	9344.....	583	9453.....	459
9124.....	540	9211.....	583	9345.....	583	9454.....	459
9125.....	529	9212.....	583	9362.....	144	9455.....	459
9126.....	286	9213.....	583	9363.....	144	9456.....	459
9131.....	147	9214.....	583	9364.....	145	9457.....	459
9132.....	147	9237.....	457	9377.....	228	9458.....	459
9138.....	281	9238.....	457	9378.....	353	9460.....	457
9140.....	281	9240.....	323	9381.....	283	9461.....	457
9142.....	285	9241.....	323	9382.....	283	9462.....	458
9145.....	284	9244.....	452	9383.....	323	9463.....	458
9150.....	287	9245.....	452	9384.....	322	9482.....	339
9151.....	287	9252.....	529	9385.....	322	9486.....	339
9152.....	143	9261.....	227	9387.....	322	9490.....	317

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
9491.....	317	9673.....	183	10042	329	10144	401
9501.....	477	9675.....	112	10043	329	10145	403
9505.....	475	9677.....	112	10045	329	10146	408
9507.....	516	9680.....	112	10046	329	10147	406
9508.....	516	9682.....	185	10047	325	10148	404
9513.....	556	9687.....	185	10048	324	10150	400
9514.....	556	9700.....	228	10050	324	10151	402
9516.....	541	9705.....	269	10051	325	10152	410
9517.....	541	9706.....	269	10052	324	10153	410
9518.....	541	9707.....	269	10053	324	10154	411
9551.....	540	9708.....	269	10054	325	10155	411
9554.....	569	9710.....	269	10055	324	10156	420
9555.....	521	9711.....	500	10056	324	10157	420
9557.....	521	9712.....	500	10057	325	10158	423
9561.....	520	9713.....	500	10058	324	10160	423
9562.....	520	9714.....	498	10060	324	10161	418
9563.....	520	9715.....	499	10062	326	10161	422
9564.....	545	9736.....	197	10063	326	10162	416
9565.....	545	9737.....	197	10064	326	10163	416
9570.....	351	9743.....	280	10065	326	10164	419
9571.....	351	9744.....	280	10067	330	10165	419
9574.....	351	9751.....	499	10068	330	10166	419
9575.....	351	9890.....	284	10070	330	10166	422
9605.....	184	10035	575	10071	330	10167	419
9606.....	184	10037	575	10105	503	10167	422
9607.....	499	10038	575	10142	407	10168	419
9672.....	183	10040	575	10143	405	10168	422

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
10170	417	10278	271	10312	44	10374	447
10171	419	10280	216	10313	42	10375	447
10171	422	10281	216	10314	45	10376	446
10175	316	10282	216	10315	273	10377	446
10176	316	10283	528	10316	273	10378	447
10177	316	10284	54	10317	273	10380	447
10184	316	10285	54	10347	273	10381	446
10185	316	10286	54	10348	273	10382	446
10186	316	10287	54	10350	273	10383	447
10208	306	10288	54	10351	273	10384	447
10210	306	10289	54	10352	273	10385	446
10212	306	10290	54	10353	273	10386	446
10213	307	10291	54	10354	113	10387	447
10214	307	10292	54	10355	113	10388	447
10225	458	10296	291	10356	219	10390	432
10226	458	10299	122	10358	454	10391	432
10227	462	10300	122	10362	35	10393	432
10228	462	10301	122	10363	40	10394	432
10230	581	10302	121	10364	41	10395	433
10231	581	10303	116	10365	41	10396	432
10235	435	10304	116	10366	48	10397	432
10236	435	10305	116	10367	48	10398	433
10237	435	10306	121	10368	51	10399	432
10238	435	10307	121	10370	51	10400	432
10239	435	10308	121	10371	51	10401	433
10276	271	10310	121	10372	446	10402	313
10277	271	10311	42	10373	446	10403	313

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
10404	313	10448	62	10492	341	10547	345
10406	313	10450	62	10493	340	10548	345
10407	313	10451	62	10494	340	10550	345
10408	313	10452	62	10495	571	10551	345
10410	313	10453	62	10496	571	10552	345
10411	313	10455	269	10497	571	10553	345
10412	313	10456	269	10498	571	10554	345
10413	313	10457	269	10499	570	10555	345
10415	313	10460	92	10500	570	10556	345
10416	313	10463	92	10501	570	10557	345
10417	313	10465	92	10502	570	10558	345
10418	313	10468	92	10503	538	10562	67
10420	314	10476	340	10504	538	10563	67
10421	314	10477	340	10525	466	10564	67
10422	314	10478	340	10526	467	10570	222
10423	314	10480	340	10527	467	10571	222
10424	314	10481	481	10535	344	10572	222
10426	314	10482	481	10536	344	10573	222
10427	314	10483	481	10537	344	10574	222
10428	314	10484	481	10538	344	10575	222
10430	314	10485	341	10540	344	10576	209
10431	314	10486	341	10541	344	10577	209
10432	314	10487	341	10542	344	10578	209
10444	62	10488	341	10543	344	10579	496
10445	62	10489	340	10544	344	10580	496
10446	62	10490	340	10545	344	10581	496
10447	62	10491	341	10546	345	10587	585

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
10588	585	10656	407	10703	292	10746	74
10589	585	10665	491	10704	60	10747	74
10593	584	10666	491	10705	60	10748	74
10594	584	10667	491	10711	487	10752	74
10595	584	10668	491	10712	487	10753	74
10596	584	10670	491	10713	478	10754	74
10597	417	10671	491	10714	478	10758	75
10618	291	10672	491	10715	478	10759	75
10620	51	10673	491	10716	478	10760	75
10621	51	10674	491	10717	480	10764	73
10622	51	10676	491	10718	480	10765	73
10623	121	10677	491	10719	480	10766	73
10633	528	10678	491	10720	480	10770	73
10637	265	10680	491	10723	469	10771	73
10638	265	10681	491	10724	469	10772	73
10643	400	10682	491	10725	469	10776	81
10644	401	10683	491	10726	469	10777	81
10645	402	10684	491	10727	469	10778	81
10646	403	10685	491	10728	469	10779	81
10647	410	10686	544	10729	479	10780	81
10648	410	10687	544	10730	479	10781	81
10650	404	10688	544	10734	72	10782	81
10651	405	10695	293	10735	72	10783	81
10652	408	10696	293	10737	76	10784	81
10653	411	10700	293	10739	76	10785	81
10654	411	10701	293	10741	77	10786	81
10655	406	10702	292	10743	77	10788	343

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
10789	343	10817	26	10863	24	10898	72
10790	343	10820	72	10864	25	10899	72
10791	343	10821	72	10865	29	10900	73
10792	343	10822	72	10866	27	10901	73
10793	343	10823	72	10867	26	10902	73
10794	343	10824	72	10872	253	10903	73
10795	93	10825	72	10873	253	10905	261
10796	93	10840	342	10878	253	10906	261
10797	93	10841	342	10879	253	10907	64
10798	93	10842	342	10880	252	10910	64
10799	93	10843	342	10881	252	10913	64
10800	93	10844	342	10882	72	10915	64
10801	93	10845	342	10883	72	10928	29
10802	93	10847	40	10884	72	10930	29
10803	93	10848	41	10885	72	10933	580
10804	93	10850	41	10886	72	10934	117
10805	93	10851	42	10887	72	10971	492
10806	93	10852	42	10888	74	10972	492
10807	93	10853	44	10889	74	10973	492
10808	29	10854	45	10890	74	10974	492
10810	32	10855	48	10891	74	10975	492
10811	32	10856	48	10892	75	10976	492
10812	24	10857	35	10893	75	10977	492
10813	24	10858	29	10894	72	10978	492
10814	25	10860	32	10895	72	10979	492
10815	29	10861	32	10896	72	10980	492
10816	27	10862	24	10897	72	10981	492

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
10982	492	11161	231	11210	310	11301	588
10983	493	11162	231	11211	310	11305	383
10984	493	11163	234	11212	310	11306	382
10985	493	11164	234	11225	258	11307	385
10986	493	11165	234	11226	258	11308	384
10987	493	11166	234	11227	258	11310	389
10988	493	11167	234	11228	258	11311	388
10989	493	11168	234	11230	258	11312	387
10990	493	11170	232	11231	258	11313	386
10991	493	11171	232	11232	258	11314	390
10992	493	11172	232	11233	258	11315	391
10993	493	11173	205	11242	240	11316	392
10994	493	11174	205	11243	240	11317	393
10995	581	11175	202	11244	241	11318	395
10996	581	11176	202	11245	241	11320	395
10997	581	11177	203	11251	241	11321	397
10998	581	11178	212	11252	241	11322	397
11150	235	11180	203	11278	588	11325	397
11151	235	11200	310	11287	588	11326	397
11152	235	11201	310	11288	212	11327	397
11153	230	11202	310	11290	212	11328	397
11154	230	11203	310	11291	212	11330	397
11155	230	11204	310	11292	212	11331	383
11156	236	11205	310	11295	434	11332	382
11157	236	11206	310	11296	434	11333	385
11158	237	11207	310	11297	452	11334	384
11160	231	11208	310	11298	455	11335	389

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
11336	388	11375	510	11434	76	11466	76
11337	387	11376	512	11435	77	11467	76
11338	386	11377	560	11436	77	11468	77
11340	390	11378	44	11437	76	11470	77
11341	391	11380	44	11438	76	11471	70
11342	392	11381	45	11440	77	11472	71
11343	393	11382	45	11441	77	11473	76
11346	548	11395	233	11442	76	11482	253
11347	548	11396	233	11443	76	11483	253
11348	341	11397	233	11444	76	11484	253
11350	341	11398	26	11445	70	11485	253
11357	308	11400	41	11446	71	11486	253
11358	308	11401	32	11447	70	11487	253
11360	558	11402	29	11448	71	11488	252
11361	558	11403	24	11450	70	11490	252
11362	558	11408	120	11451	71	11491	252
11363	537	11410	246	11452	252	11492	252
11364	537	11411	246	11453	252	11493	252
11365	537	11412	246	11454	252	11494	241
11366	537	11413	246	11455	252	11495	241
11367	557	11414	246	11456	252	11496	240
11368	530	11425	46	11460	58	11510	248
11370	530	11426	46	11461	58	11511	248
11371	511	11427	589	11462	59	11512	248
11372	511	11431	49	11463	59	11513	248
11373	511	11432	210	11464	59	11520	199
11374	510	11433	76	11465	59	11521	199

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
11525	582	11557	533	11591	44	11632	401
11528	561	11558	533	11592	44	11633	401
11530	561	11560	533	11601	29	11634	403
11531	552	11561	533	11602	26	11635	403
11532	552	11562	535	11603	29	11636	404
11533	552	11563	535	11604	24	11637	404
11534	552	11564	535	11605	32	11638	405
11535	552	11565	535	11606	35	11639	405
11536	554	11566	535	11607	35	11640	408
11537	554	11567	535	11616	418	11641	408
11538	509	11568	535	11616	422	11642	406
11540	513	11570	535	11617	419	11643	406
11541	508	11571	535	11617	422	11644	407
11542	508	11572	535	11618	419	11645	407
11543	567	11573	535	11620	419	11646	25
11544	507	11574	535	11621	419	11647	25
11545	507	11578	46	11621	422	11648	26
11546	507	11580	46	11622	423	11649	26
11547	519	11581	41	11623	423	11650	150
11548	531	11582	41	11624	420	11651	150
11550	531	11583	40	11625	420	11652	151
11551	531	11584	40	11626	416	11653	151
11552	531	11585	51	11627	416	11654	152
11553	532	11586	51	11628	419	11655	152
11554	532	11587	51	11628	422	11656	153
11555	533	11588	45	11630	400	11657	154
11556	533	11590	45	11631	400	11658	154

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
11659	155	11700	139	11731	376	11784	193
11660	155	11701	138	11732	378	11785	192
11661	156	11702	138	11733	378	11786	194
11662	156	11703	139	11734	375	11787	193
11663	157	11704	138	11734	378	11788	192
11664	160	11705	130	11735	375	11790	194
11665	160	11706	130	11735	378	11791	194
11666	160	11707	131	11736	375	11792	193
11667	163	11708	131	11736	378	11793	192
11668	162	11712	366	11737	372	11794	589
11669	162	11713	368	11738	373	11795	589
11670	161	11714	368	11740	373	11796	589
11671	161	11715	369	11743	363	11797	589
11672	161	11716	369	11744	373	11798	589
11673	166	11717	364	11746	141	11800	589
11674	166	11718	361	11747	141	11801	589
11675	166	11720	360	11748	141	11802	589
11676	169	11721	362	11750	141	11803	417
11677	168	11722	367	11763	74	11804	547
11678	168	11723	365	11764	74	11805	547
11679	167	11724	372	11765	74	11812	66
11680	167	11725	372	11766	74	11813	66
11681	167	11726	375	11778	194	11814	66
11682	171	11726	379	11780	193	11815	66
11683	171	11727	375	11781	192	11874	588
11684	171	11728	375	11782	194	11875	588
11699	139	11730	376	11783	194	11876	275

INDEKS LAMP / PROGRESSIVE CODE INDEX

INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE	INDEX	STRONA PAGE
11877	275	11883	275	11887	37	11894	379
11878	275	11884	275	11888	37		
11879	34	11885	34	11893	375		
11882	275	11886	37	11894	375		



Nowodvorski
LIGHTING



Nowodvorski Lighting sp. z o.o.
ul. Bojemskiego 11
42-202 Częstochowa
POLAND



+48 34 344 91 10 / 11



nowodvorski@nowodvorski.com



www.nowodvorski.com





www.nowodvorski.com